


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

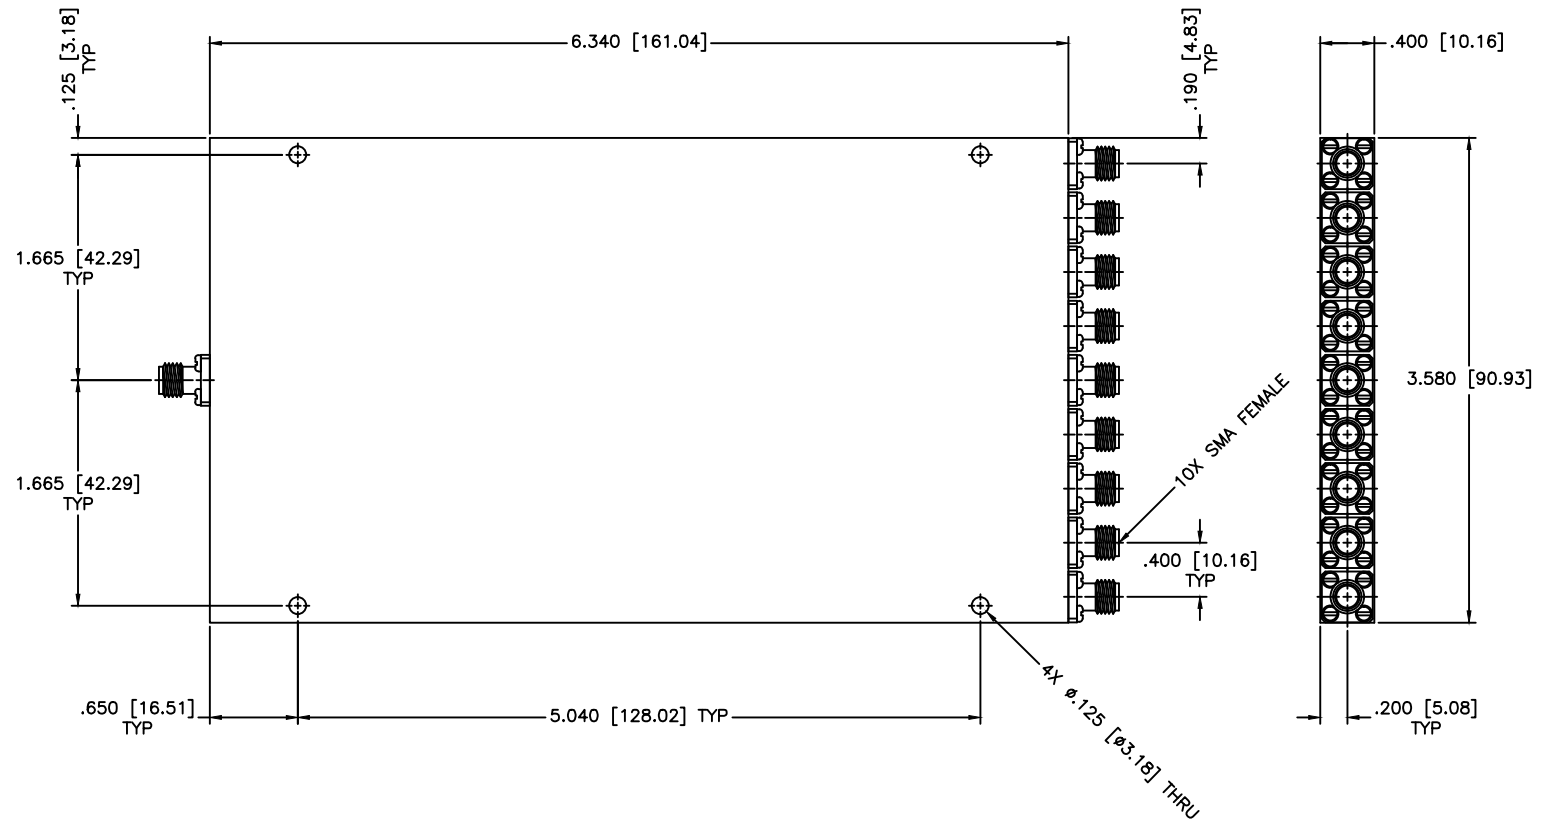

SPECIFICATION

Frequency Range: 650–3000 MHz
 Insertion Loss: 2.5dB MAX.
 Isolation: 14dB MIN.
 VSWR IN/OUT: 1.90:1/1.70:1 MAX.
 Amplitude Balance: ±0.9dB
 Input Power: 20 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		
		9-WAY POWER DIVIDER		
DRAWN:		PART NO.		
Paiboon Luekhamhan		PS9-2/S		
DATE:		CAGE CODE:	SIZE:	REV:
09-28-2010		OD2L5	N/A	N/A
APPROVED:		DO NOT SCALE THE DRAWING		DWG NO.
T. Nguyen				85059
DATE:		THIRD ANGLE PROJECTION		
09-28-2010				