




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

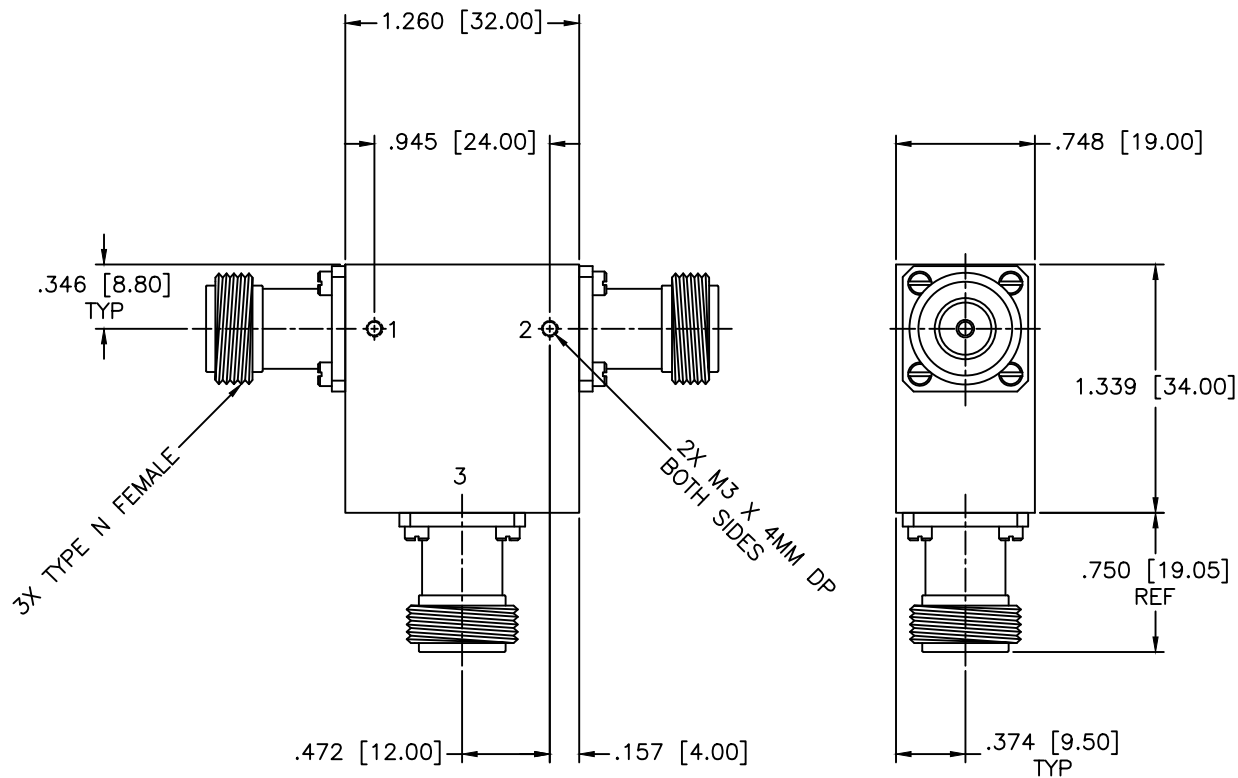

SPECIFICATIONS

Frequency Range: 2.4–2.8 GHz
Isolation: 20dB Min.
Insertion loss: 0.30dB Max.
VSWR: 1.25:1 Max.
Operating Temperature: –54°C to +85°C
Power: 150W Avg, 250W Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luethamhan		DATE: 06-01-2009		DRAWING TITLE: COAXIAL CIRCULATOR	
				PART NO. CS-98/NF	
APPROVED: T. Nguyen		DATE: 06-01-2009		CAGE CODE: 0D2L5	
				SIZE: A REV: N/A DWG NO. 84526	
				DO NOT SCALE THE DRAWING	

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR (mm) (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.005$
ANGLE: $\pm 1/2^\circ$

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

