

11LB10-312.5/XQ175-N/N High Power Bandpass

◆ Features:

- Type N Connectors
- 500 Watts CW Power
- Low Loss



◆ Specifications:

Insertion Loss:

@ 225 to 400 MHz

<0.5 dB

VSWR:

@ 225 to 400 MHz

1.25:1

Stopband:

@ 100 & 525 MHz

>70 dB

Power:

500 watts CW

Dimensions:

10" x 2.0" x 1.5"

Environmental Specs:

Shock

20 G's, 1/2 Sine, 11ms

Vibration

10 G's, 10 Hz - 2000 Hz

Temperature


-55 to 85° C

Relative Humidity


0 - 95%

◆ Applications:

- Mobile

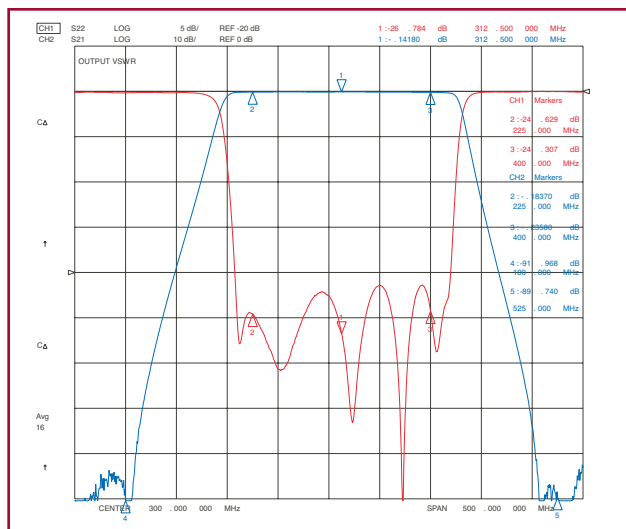

Amplitude / VSWR

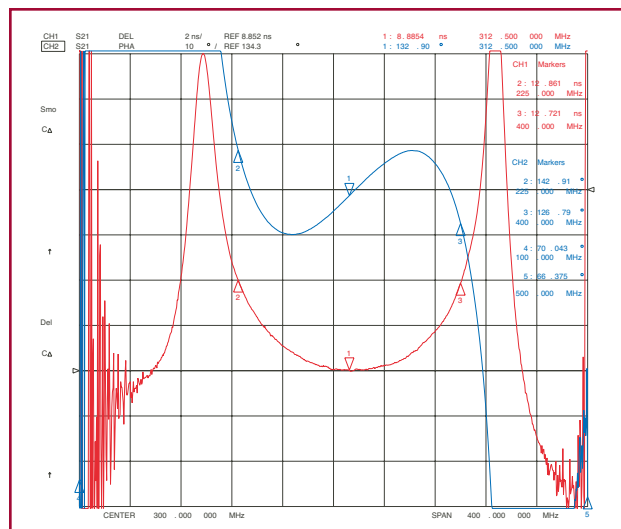

Phase / Delay

www.klmicrowave.com
Phone: 410-749-2424 • FAX: 443-260-2268
Email: sales@klmicrowave.com



www.klfilterwizard.com
2250 Northwood Drive
Salisbury, MD 21804