

40 Watt Ku-Band Outdoor High Power SSPA Block Upconverter



FEATURES

- No Shelter Required
- Low Cost Operation
- Complete Digital M&C Interface
- RS-232, RS-422, RS-485
- Optional Ethernet Interface

The **XTS-40K-B1** High Power Solid State Block Upconverters (BUC) are a series of compact fully integrated antenna mount units designed for low cost operation and longevity. The L-Band input interfaces to standard modems operating in the 950 - 1700 MHz range.

Intended for outdoor operation, the **XTS-40K-B1** eliminates the need for a separate shelter. The construction and light weight allows for direct mount to the antenna. This eliminates long wave-guide runs and associated RF losses.

Forced air cooling is implemented in the package to allow reliable operation over extended temperature ranges. The monitor and control (M&C) interface provides a component system status.

The block upconverter operates from an external, weatherized power supply which provides the system DC sources.

The L-Band transmit signal and 10 MHz reference frequency are brought to the unit over a single coaxial line.




3550 Bassett Street • Santa Clara • CA 95054 • Tel: (408) 213-3000 • Fax: (408) 213-3001
www.xicomtech.com • email sales@xicomtech.com


PERFORMANCE SPECIFICATION

Parameters	XTS-40K1-B1	XTS-40K2-B1
FREQUENCY RANGE extended, other frequency coverage available		
Output	14.0 to 14.5 GHz	13.75 to 14.5 GHz
Input	950 to 1450 MHz	950 to 1700 MHz
LO Frequency	13050 MHz	12800 MHz
Input Level, w/o damage (maximum)	10 dBm	
Reference Signal Frequency	external 10 MHz	
10 MHz Power Level	2 dBm ± 5 dB	
Reference Input Impedance	50 Ohms	
OUTPUT POWER	14.0 to 14.5 GHz	13.75 to 14.5 GHz
Saturated Power (typical)	47 dBm	46 dBm
Rated Power (P1dB) @ Amplifier Flange (minimum)	46 dBm	45 dBm
GAIN		
Small Signal, min.	50 dB	
Maximum SSG Variation Over		
Any Narrow Band	± 0.65 dB per 80 MHz	
Full Band	± 1.25 dB	
Slope (maximum)	± 0.04 dB/MHz	
Stability, 24 hr. (maximum)	± 0.25 dB	
Stability, Temperature (maximum)	± 2.0 dB over temperature range at any frequency	
INTERMODULATION (maximum) with two equal carriers	-25 dBc @ 3 dB total output power backoff from rated power	
HARMONIC OUTPUT (maximum)	-60 dBc	
AM/PM CONVERSION (maximum)	2.5 deg/dB at 3 dB below rated output power	
NOISE POWER (maximum)		
Transmit Band	-80 dBW/4 kHz	
Receive Band	-150 dBW/4 kHz	
GROUP DELAY (maximum)		
Bandwidth	Any 80 MHz	
Linear	± 0.01 nS/MHz	
Parabolic	± 0.005 nS/MHz²	
Ripple	0.5 nS/Pk-Pk	
RESIDUAL AM NOISE (maximum) In band discrete spurious	-60 dBc > 100 kHz from carrier AC fundamental -50 dBc Sum of all spurs -47 dBc	
PHASE NOISE (maximum)	100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	-63 dBc/Hz -73 dBc/Hz -83 dBc/Hz -93 dBc/Hz -103 dBc/Hz
10 MHz REFERENCE PHASE NOISE (maximum)	1 kHz 10 kHz 100 kHz	-150 dBc/Hz -160 dBc/Hz -160 dBc/Hz
VSWR		
Input (maximum)	2.0:1	
Output (maximum)	1.3:1	

BLOCK DIAGRAM

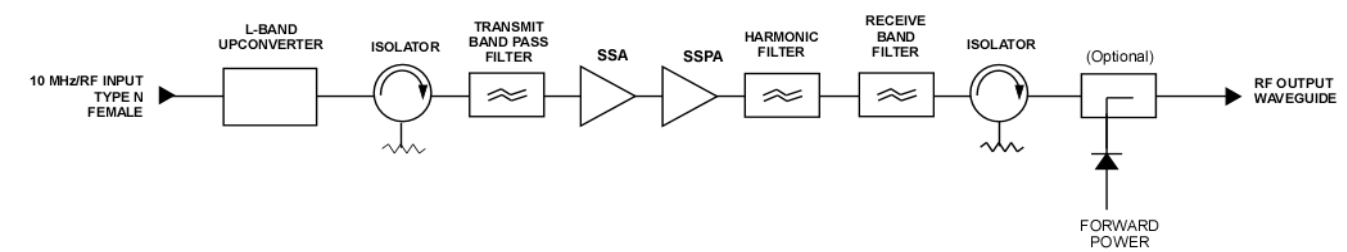

OUTLINE DRAWING

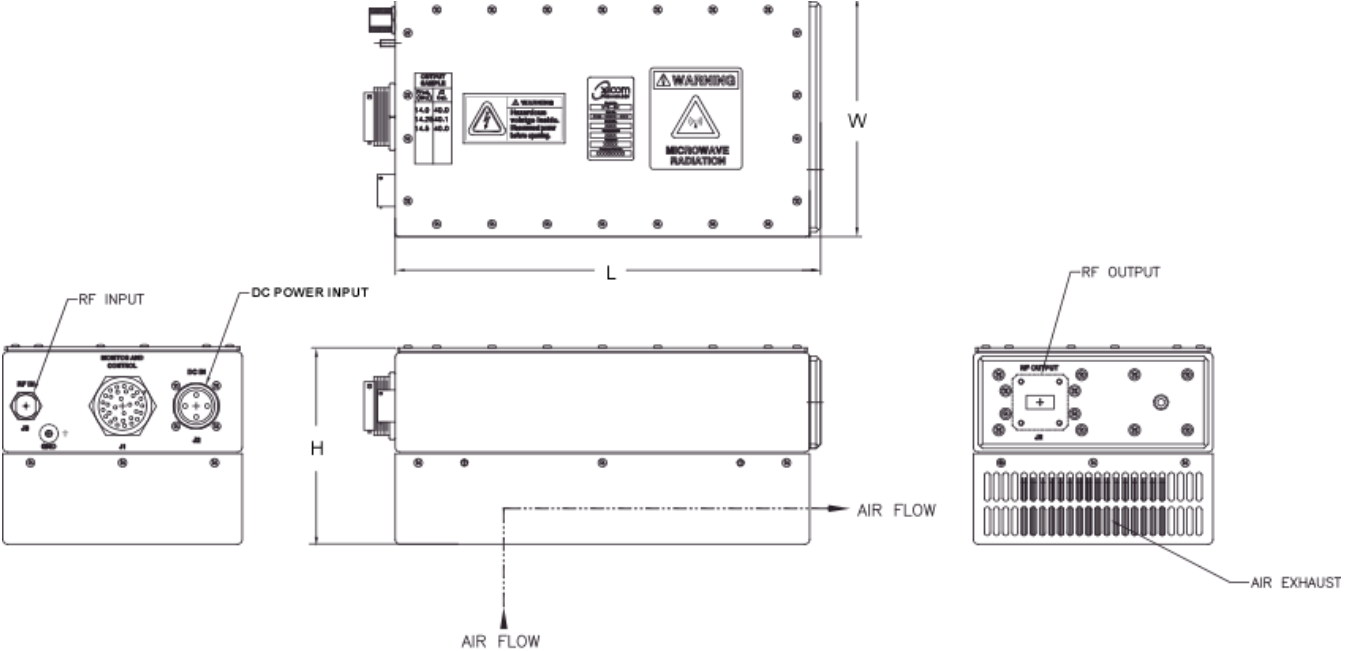

DIMENSIONS (MAX)		
	INCHES	CENTIMETERS
L	11.63	29.54
H	5.5	13.97
W	6.5	16.51
WEIGHT (Typical)		
	15 lb	6.8 kg
RF OUTPUT = WR-75 Tapped		

PRIME POWER

20 to 56 VDC
450 VA Typical



ENVIRONMENT


NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +50°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 100% Condensing
ALTITUDE	10,000 Feet MSL Max.
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
REMOTE CONTROL	Transmit ON/OFF	Fault Reset
	RF Inhibit	
REMOTE STATUS	Transmit ON/OFF	Summary Fault
	Temperature (°C)	RF Inhibit (ON/OFF)
	Forward Power (Optional)	Fault Identification
		Lock Detect Over Temperature
XICOM COMMAND SET	ASCII Commands	

OPTIONS

- Input Diplexer (combining IF and 10 MHz reference)
- Detected RF Transmit Power
- Ethernet Interface
- External AC Power Supply, 90 to 264 VAC, 47 to 63 Hz
- 10 to 14 VDC Input Voltage
- 10 MHz Reference
- Connectors (RF, DC, M&C) on side

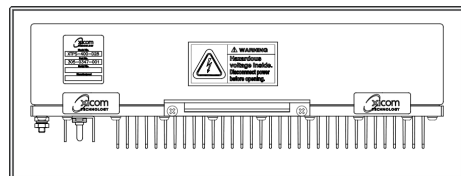

External Power Supply

Headquarters

Comtech Xicom Technology, Inc.
3550 Bassett Street
Santa Clara, CA 95054
USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
4 Portland Business Center
Manor House Lane
Datchet
Berkshire SL3 9EG
United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
150 Cecil Street
#08-02
Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com