
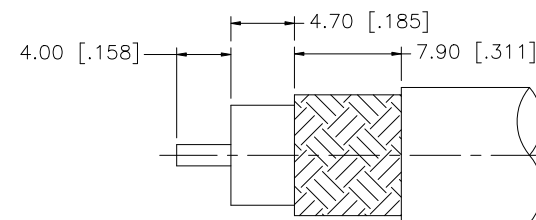
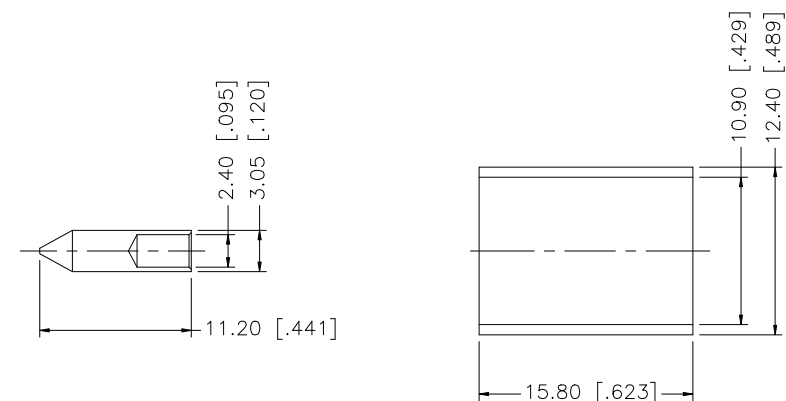


REV.	DATE	ECR NO.	DESCRIPTION
A	12/29/00	—	REVISE PLATING TO SILVER
B	06/01/04	—	UPDATE DRAWING FORMAT
C	04/19/06	—	REVISE BODY PLATING TO NEXCOTE
D	12/17/06	—	REVISE BODY STYLE TO 32 HEX
E	12/28/08	100070	REVISE BODY FORMAT

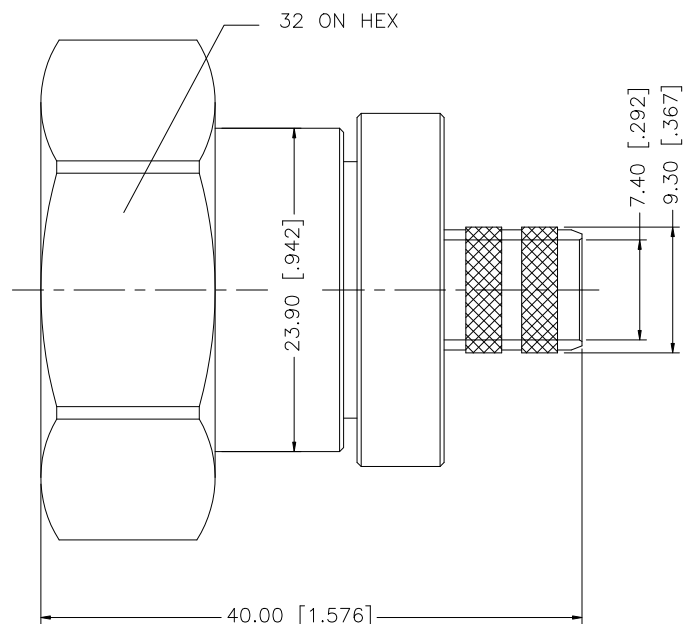

RECOMMENDED CABLE
STRIPPING DIM'S

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8					DRAWN	GRS	12/28/08							
7					CHECKED									
6					ISSUED				PART DESCRIPTION 7/16 STRAIGHT PLUG (FOR LMR400, BELDEN 9913 CABLE)					
5					SHEET		1 OF 1							
4	FERRULE	COPPER	NEXCOTE		1	CAD FILE		C:/272/272107.DWG		PART NO. 272107				
3	CONTACT PIN	BRASS	SILVER		1									
2	INSULATOR	PTFE	NATURAL		1					DWG. NO. 272107.DWG				
1	BODY	BRASS	NEXCOTE	1										
	DESCRIPTION	MATERIAL	FINISH	QTY					REV.	E	SIZE	A	SCALE	NA