

TERMINATION TNC-MALE REVERSE POLARITY

STT0679

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-6 GHZ
VSWR @ 3 GHZ: 1.2:1 MAX
VSWR @ 6GHZ: 1.3:1 MAX
POWER (AVG) 2 WATTS @ 25 DEG C
DERATES LINERLY TO 1W @ 125 DEG C
POWER (PEAK) 1KW/50 MICRO-S
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +125C


MECHANICAL:

MATERIAL BODY: BRASS w TRI-METAL PLATING
CENTER CONTACT: GOLD PLATED PER MIL-G-45204

REVERSE POLARITY
TNC-MALE
SOCKET, NO PIN

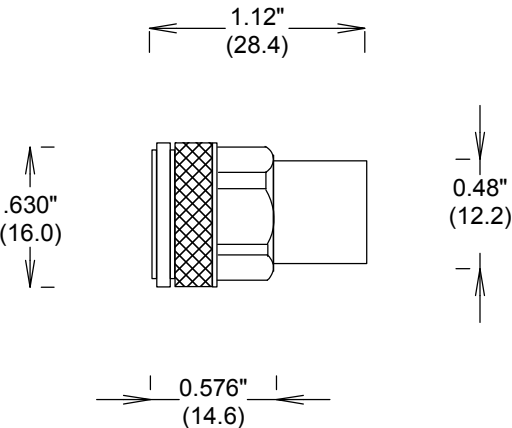

MEASUREMENTS BELOW ARE TYPICAL

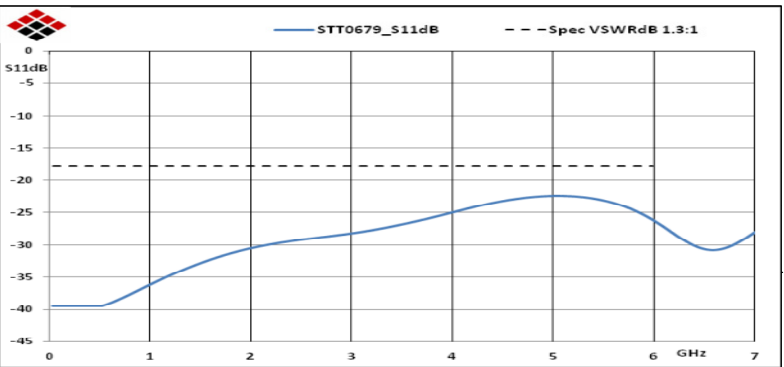

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TERMINATION TNC-MALE REVERSE POLARITY

SIZE

A

CAGE CODE

3FKR5

DWG NO

STT0679

REV

A

SCALE

SHEET