

IMPEDANCE MATCHING PADS

BNC (50 Ω) / BNC (75 Ω) DC - 1 GHz, 5.7 dB

SPECIFICATIONS:

Models: 9033-50/75 & 9033-75/50

RoHS
Compliant

Electrical:

Frequency Range _____ DC - 1 GHz
Attenuation _____ 5.7 $\pm$ 0.5 dB
VSWR _____ 1.20:1 Max.
Input Power _____ 1 Watt Avg @ +25°C
Derated Linearly to 0.25 Watts @ +85°C
Peak Power _____ 250 Watts Max.
(5uSec Pulse, .05% Duty Cycle)
Operating Temperature Range _____ -20°C to +85°C


Mechanical:

BNC Connectors _____ Nickel Plated Brass
Center Contacts _____ Gold Plated Beryllium Copper or Brass

AEROFLEX
A passion for performance.

Model Number: **9033-50/75**
BNC Male 75 Ohm / BNC Female 50 Ohm

Model Number: **9033-75/50**
BNC Male 50 Ohm / BNC Female 75 Ohm

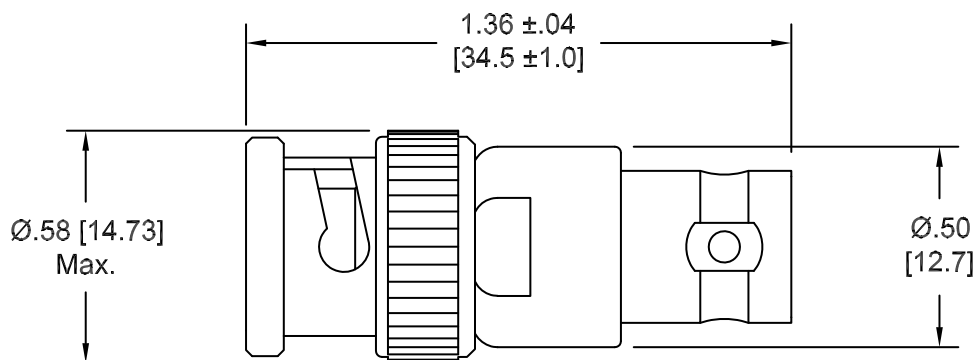

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

9033-50_75: REV G

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com