

CONN SMA-M RG8X LMR240 CRIMP

SC7033

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-6 GHZ
VSWR 1.2:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55°C- +85°C

MECHANICAL:



MATERIAL BODY: BRASS
CENTER CONTACT: BeCu
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON

TORQUE: 3-5 IN-IBS

ROHS COMPLIANT

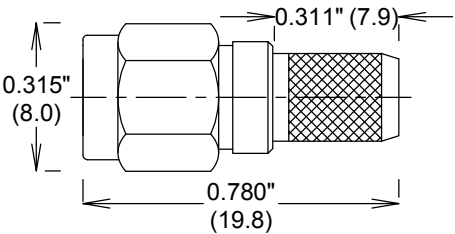

RECOMMENDED CRIMP DIE: .255"



STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

CONN SMA-M RG8X LMR240 CRIMP

ALL DIMENSIONS IN inches(MM) Typical	SIZE	CAGE CODE	DWG NO	REV
	A	3FKR5	SC7033	--
	SCALE		SHEET	