

ATTENUATORS BNC

UP TO **4 GHz**
100 WATTS

api 
technologies corp.
> INMET


MODELS: XBNC100W-XX, XBNC100W-XXF, XBNC100W-XXM

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC – 4 GHz
Standard Freq. Values _____ 2.5 & 4 GHz
Standard dB Values _____ 3, 6, 10, 20, 30 & 40 dB
Attenuation Accuracy DC – 1.5 GHz 1.5 – 2.5 GHz 2.5 – 4 GHz
3 & 6 dB _____ ± 0.50 dB _____ ± 0.50 dB _____ ± 0.75 dB
10 dB _____ ± 0.75 dB _____ ± 0.75 dB _____ ± 1.00 dB
20 & 30 dB _____ ± 0.75 dB _____ ± 0.75 dB _____ ± 1.00 dB
40 dB _____ ± 1.50 dB _____ ± 1.50 dB _____ ± 1.50 dB
VSWR (Max.) _____ 1.25:1 _____ 1.35:1 _____ 1.45:1
Input Power _____ 100 Watts Avg. @ +25°C
DERATED LINEARLY TO 20 WATTS @ +125°C
Output Power _____ 20 Watts
Peak Power _____ 1 kW Max.
(5uSec Pulse, .05% Duty Cycle)
Impedance _____ 50 Ohms
Operating Temp Range _____ -55°C to +125°C

Custom Mtg. hole Config.
may be Added to this
Surface

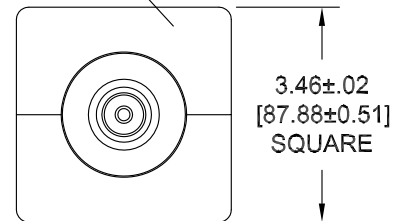

**END VIEW
TYPICAL**

Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Housing _____ Anodized Aluminum

Units must be Mounted in such
a way as to Allow for Free Air
Flow Around fins as to Assure
Performance.

Note: Units are Unidirectional, Therefore Input Connector MUST be Specified & will be Indicated on Unit.

Model Number: **XBNC100W-XX**


Male/Female Connectors
Length: 6.55 $\pm$.08 [166.4 $\pm$ 2.0]
Pictured

Model Number: **XBNC100W-XXF**

Female/Female Connectors
Length: 6.44 $\pm$.08 [163.6 $\pm$ 2.0]

Model Number: **XBNC100W-XXM**

Male/Male Connectors
Length: 6.66 $\pm$.08 [169.2 $\pm$ 2.0]

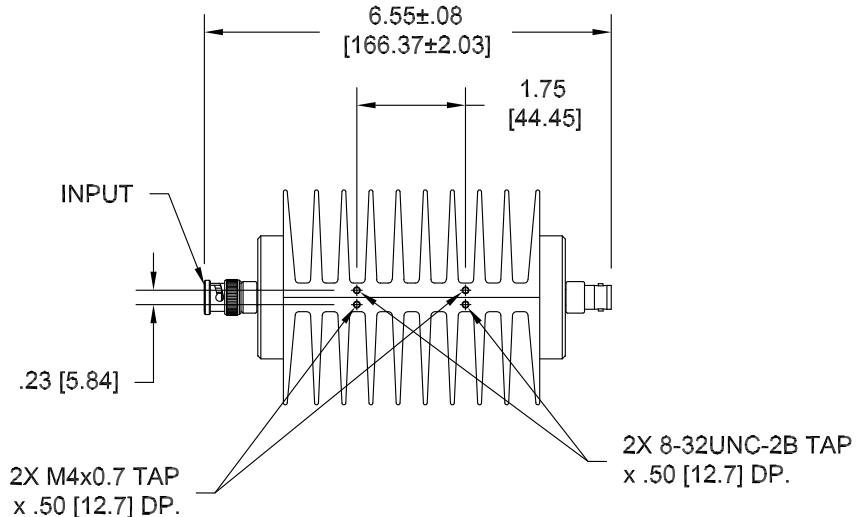

HOW TO ORDER:

Model Number: **XBNC100W-XXY**

Freq. Range
2 = DC – 2.5 GHz
4 = DC – 4 GHz

dB Value

Connector Config.
= Male/Female
(Male Input)

F = Fem/Fem
M = Male/Male
FM = Female/Male
(Female Input)

Ordering Examples:

Model Number: **2BNC100W-30**

DC – 2.5 GHz, 30 dB; BNC, Male/Fem

Model Number: **2BNC100W-03F**

DC – 2.5 GHz, 3 dB; BNC, Fem/Fem

Model Number: **4BNC100W-20FM**

DC – 4 GHz, 20 dB; BNC, Fem/Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design specifications are subject to change without notice.

Contact factory for technical specifications before purchasing or use.

XBNC100W-ATT; REV A

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com