





Standards
NF C 96-315
MIL-DTL-39030

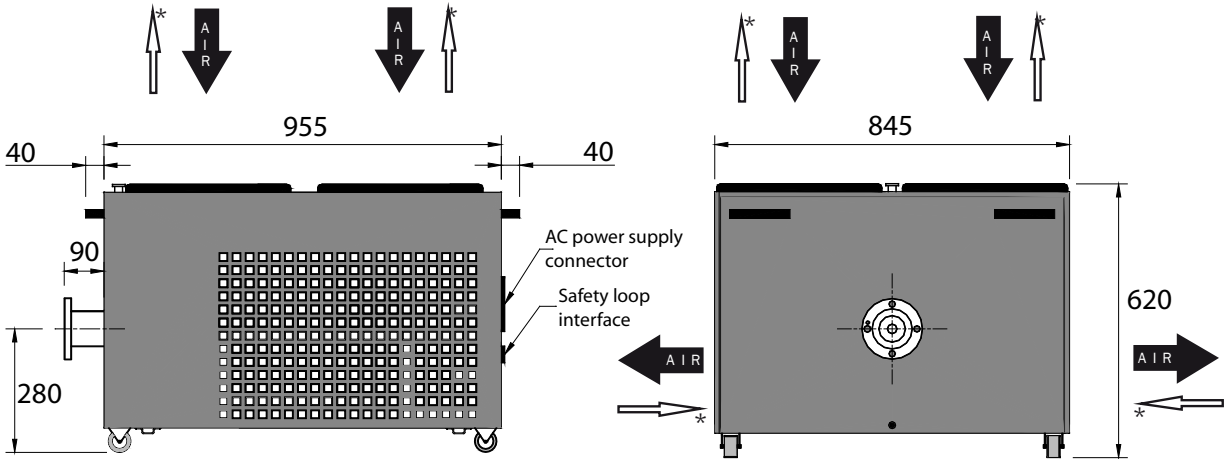

Impedance	50 Ω ± 5%
Frequency	DC – 1 GHz
Max VSWR	≤ 1.10 at 860 MHz
Average power @ 25°C	50 kW (Potable water) 32 kW (Mixture with 35% ethylene glycol)
Cooling	Water + forced air
Potable water	7 < pH < 8.2, mineral salts concentration < 75 ppm
Weight	95 kg

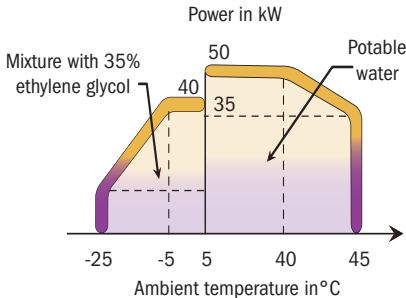

Dimensions in mm

P/N	Connector	AC power supply
17-0169	EIA 3.1/8"	220 V – 50 Hz
17-0486	EIA 3.1/8"	115 V – 50/60 Hz
17-0447*	EIA 3.1/8"	220 V – 50 Hz

* Air flow inverted

Option	VSWR ≤ 1.06 470 to 860 MHz for digital applications
--------	---

Instruction manual and wiring diagram available on request

