

- **High Performance SAW Filter**
- **3.8 X 3.8 X 1 mm Surface-mount Case**
- **Differential Input and Output**
- **Complies with Directive 2002/95/EC (RoHS)**




Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Maximum DC Voltage Between any Two Terminals	30	VDC
Operating Temperature Range	-40 to +85	°C
Storage Temperature Range	-60 to +95	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	

SF2079D-1

**251.045 MHz
SAW Filter**



SM3838-8

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_c	1		251.045		MHz
Insertion Loss	IL			13.0	15.0	dB
Amplitude Ripple:						
($f_c - 6.2500$) to ($f_c - 4.3925$) MHz		1, 2		0.90	1.75	dB _{p-p}
($f_c - 4.3925$) to ($f_c - 2.5350$) MHz				0.60	1.50	
($f_c - 2.5350$) to ($f_c - 0.0250$) MHz				0.60	1.50	
($f_c + 0.0250$) to ($f_c + 2.5350$) MHz				0.80	1.50	
($f_c + 2.5350$) to ($f_c + 4.3925$) MHz				0.80	1.75	
($f_c + 4.3925$) to ($f_c + 6.2500$) MHz				0.60	1.75	
1.5 dB Bandwidth Centered at f_c				13.5		MHz
3.0 dB Bandwidth Centered at f_c				14.2		
Low Side Attenuation < ($f_c - 16.5$) MHz			32			dB
Low Side Attenuation, 234.545 to 240.545 MHz ($f_c - 10.5$ MHz)			29			
High Side Attenuation, 260.045 to 267.545 MHz ($f_c + 9.0$ MHz)			18			
High Side Attenuation > ($f_c + 16.5$) MHz			32			
Temperature Coefficient of frequency					-18	ppm/K
Group Delay Ripple:		1, 2, 3				
($f_c - 6.2500$) to ($f_c - 4.3925$) MHz				84	150	ns _{p-p}
($f_c - 4.3925$) to ($f_c - 2.5350$) MHz				35	70	
($f_c - 2.5350$) to ($f_c - 0.0250$) MHz				22	120	
($f_c + 0.0250$) to ($f_c + 2.5350$) MHz				58	120	
($f_c + 2.5350$) to ($f_c + 4.3925$) MHz				37	70	
($f_c + 4.3925$) to ($f_c + 6.2500$) MHz				52	110	
Source/Load Impedance				150		ohms
Case Style		6	SM3838-8 3.8 x 3.8 mm Nominal Footprint			
Lid Symbolization (YY=year, WW=week, S=shift) See note 4			827 YWWS			





CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.



NOTES:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout

and external impedance matching design. See Application Note No. 42 for details.

4. The design, manufacturing process, and specifications of this filter are subject to change.
5. Tape and Reel Standard Per ANSI / EIA 481.
6. US and international patents may apply.
7. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd..

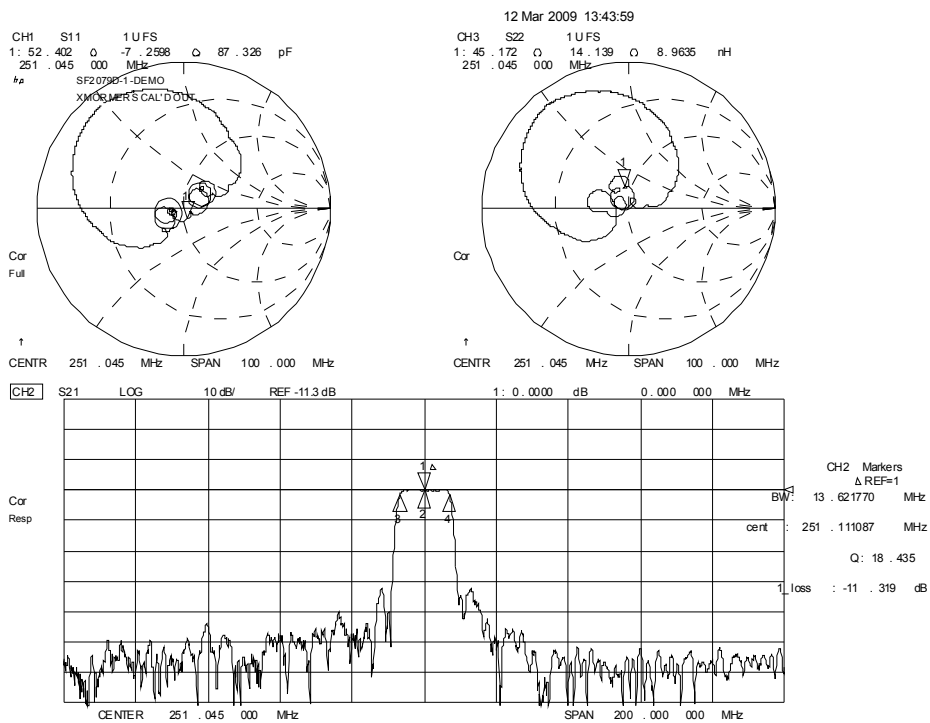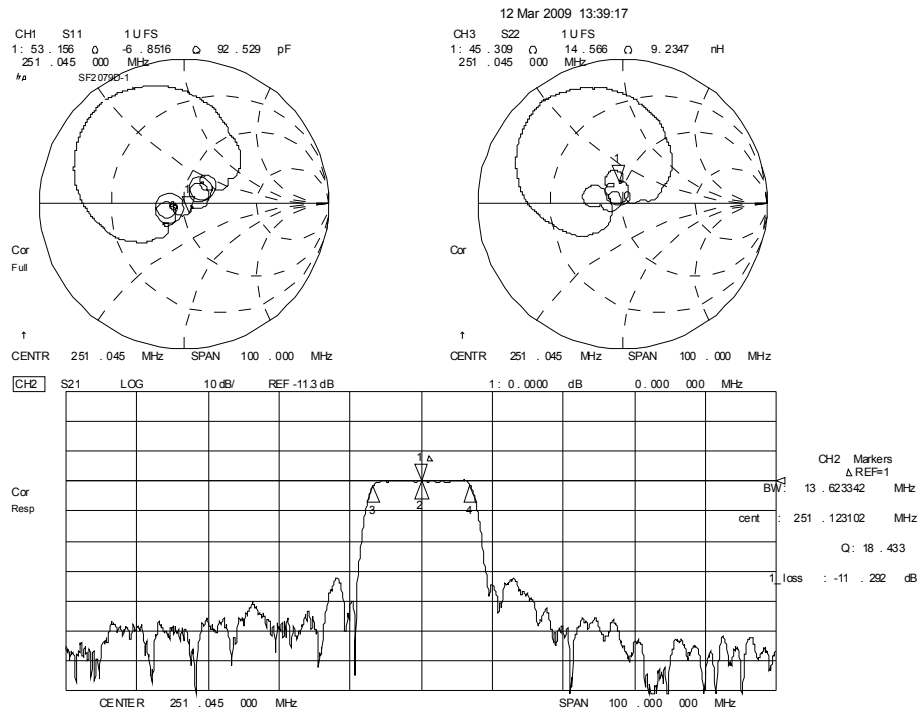

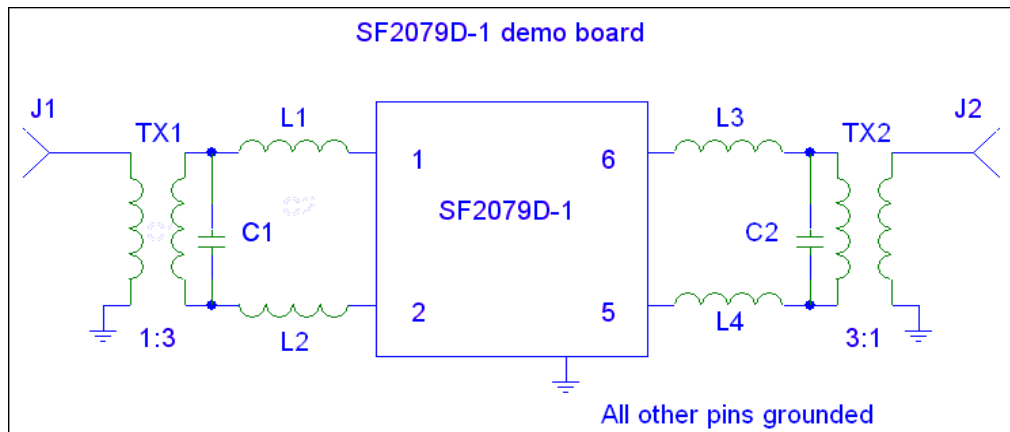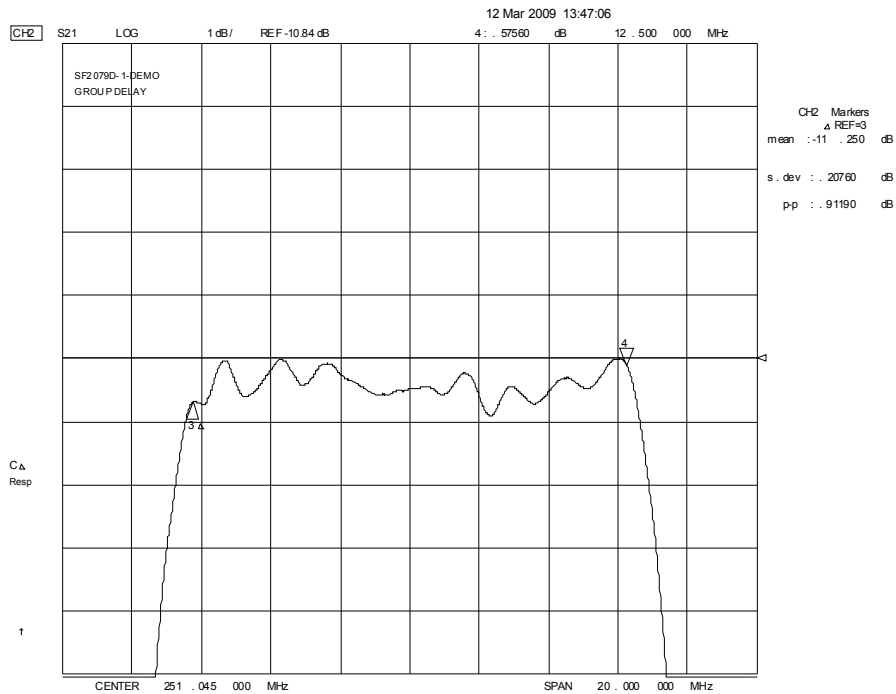


PCB 401-1706-001
 J1, J2 500-0248-002
 TX1, TX2 500-0912-003
 L1, L2 501-1068-430
 L3, L4 501-1068-390
 C1 501-0621-150
 C2 501-0621-160

2-HOLE FLANGE MOUNT SMA CONNECTOR
 1:3 TRANSFORMERS SMA
 IND, CHIP, 43nH 0603
 IND, CHIP, 39nH 0603
 CAP, CHIP, 15pF 0603
 CAP, CHIP, 16pF 0603

SM3838-8 Thin Case

8-Terminal Ceramic Surface-Mount Case

3.8 X 3.8 mm Nominal Footprint

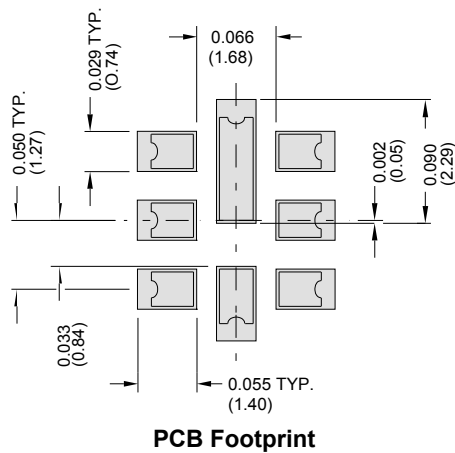


Case Dimensions						
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.6	3.8	4.0	0.142	0.150	0.157
B	3.6	3.8	4.0	0.142	0.150	0.157
C	0.90	1.00	1.1	0.035	0.040	0.043
D	0.80	0.90	1.0	0.031	0.035	0.040
E	0.90	1.00	1.10	0.035	0.040	0.043
F	0.50	0.60	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.40	1.75	2.05	0.055	0.069	0.080



Electrical Connections		
	Connection	Terminals
Port 1	Differential Input	1, 2
Port 2	Differential Output	5, 6
	Ground	All Others

Dot Indicates Pin 1


TOP VIEW

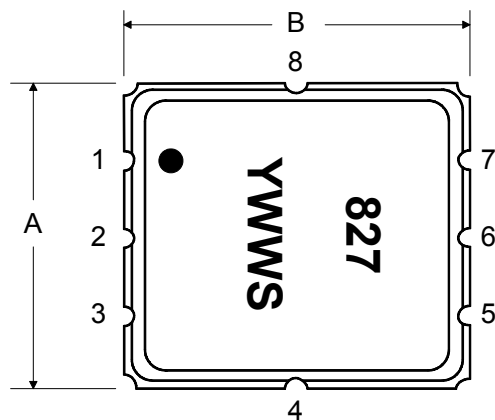

BOTTOM VIEW

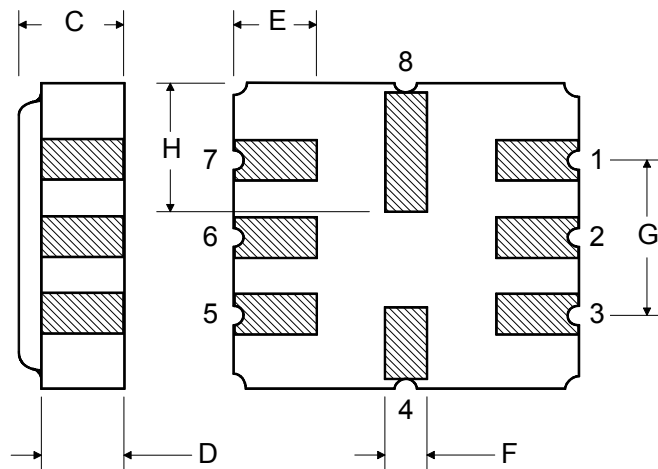

Tape and Reel Specifications

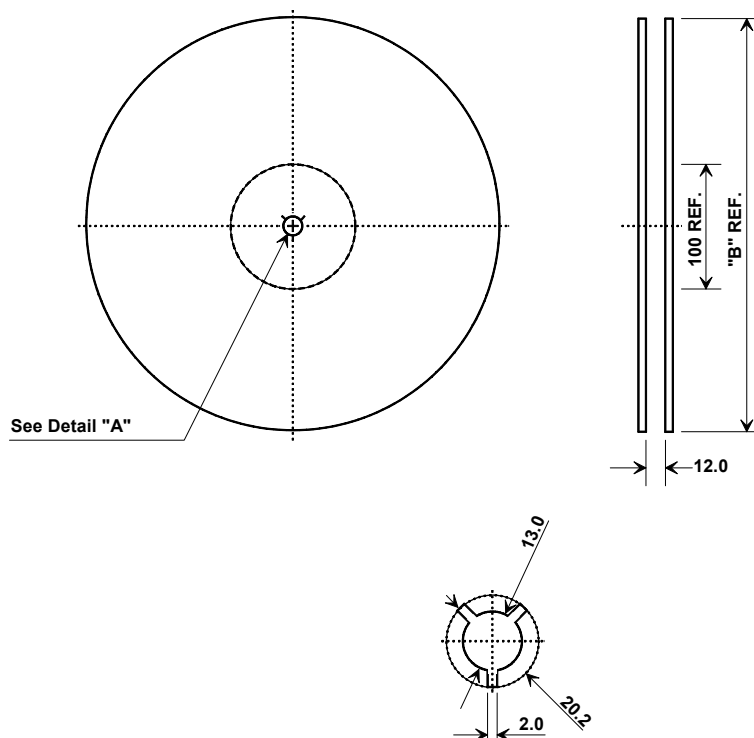

“B” Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	3000

COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.30 mm
Pitch	8.0 mm
W	12.0 mm

