


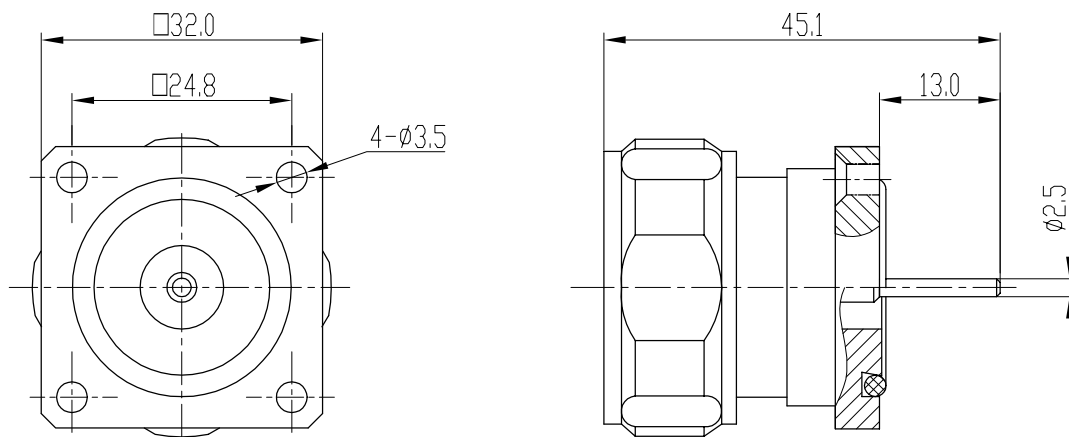

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~7.5GHz
3. Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Out conductor: $\leq 0.5\ m\Omega$
4. Insulation resistance: $\geq 10000\ M\Omega$
5. Insulator withstanding: 4000V
6. Durability: 500cycles

Application: IEC 60169-4

Material & Finishing

1. Center contact :
Male: brass, silver plated
2. Body and other metal parts:
brass, SUCO plated
3. Insulators: PTFE
4. Gasket: silicone rubber

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~7.5GHz
3. 接触电阻:
中心导体: $\leq 1.0\ m\Omega$
外导体: $\leq 0.5\ m\Omega$
4. 绝缘电阻: $\geq 10000\ M\Omega$
5. 介质耐压: 4000V
6. 插拔次数: 500次

执行标准: IEC 60169-4

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀银
2. 壳体和其它金属零件: 黄铜, 镀三元合金
3. 绝缘子: 聚四氟乙烯
4. 密封圈: 硅橡胶

 	SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES $.X \pm .15$ $\pm 1^\circ$ $.XX \pm .05$ $.XXX \pm$
	1.5:1		
L29-JFD10 RF COAXIAL CONNECTOR			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO., LTD.
NAME	DATE		
DRAWN			
CHECKED			
APPROVED			