





Standards
NF C 96-315
MIL-DTL-39030

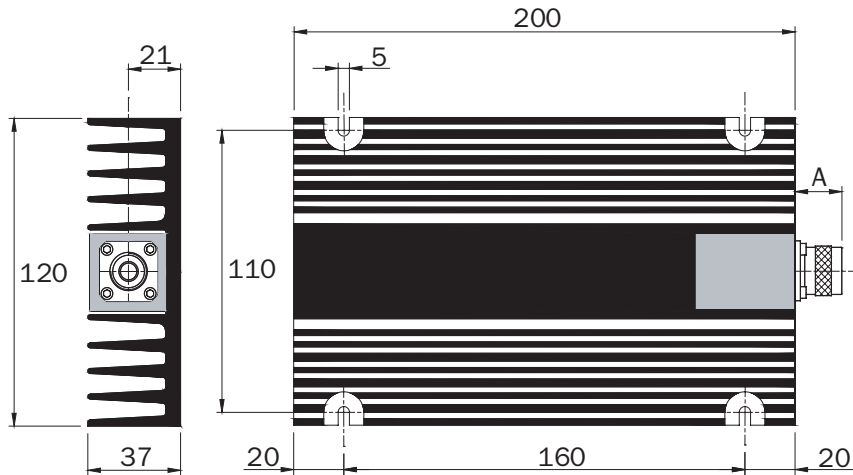

Impedance	$50 \Omega \pm 2\%$
Frequency	DC - 4 GHz
Max VSWR	≤ 1.10 at 2.2 GHz, ≤ 1.25 at 3 GHz
Temperature range	-55 to +125°C
Peak power	10 kW
Weight	1 kg

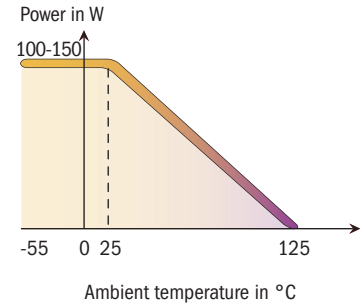

Dimensions in mm

P/N	Connector	Power (W)	A
17-3111	N m	100	21
17-3126	N f	100	19
17-0068	7-16 m	100	31
17-0094	7-16 f	100	22
17-3208	N m	150	21
17-3112	N f	150	19
17-0057	7-16 m	150	31
17-0095	7-16 f	150	22