

ADAPTERS, IN-SERIES TYPE N

DC - 18 GHz BULKHEAD MOUNT



MODELS: 5208 and 5215


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC – 18.0 GHz
VSWR _____ 1.15:1 Max.
Nominal Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C

Mechanical:


Connectors _____ Passivated Stainless Steel
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper
Nut & Washer: _____ Passivated Stainless Steel
O-Ring _____ Silicone Rubber

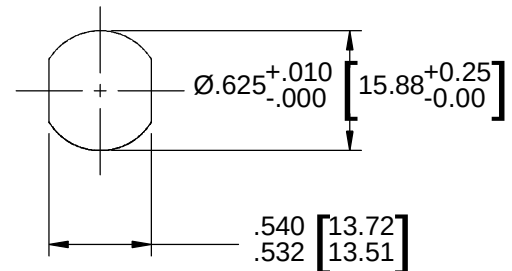

Recommended Panel
Configuration

Model Number: **5208**
No O-Ring added

Model Number: **5215**
*Includes O-Ring

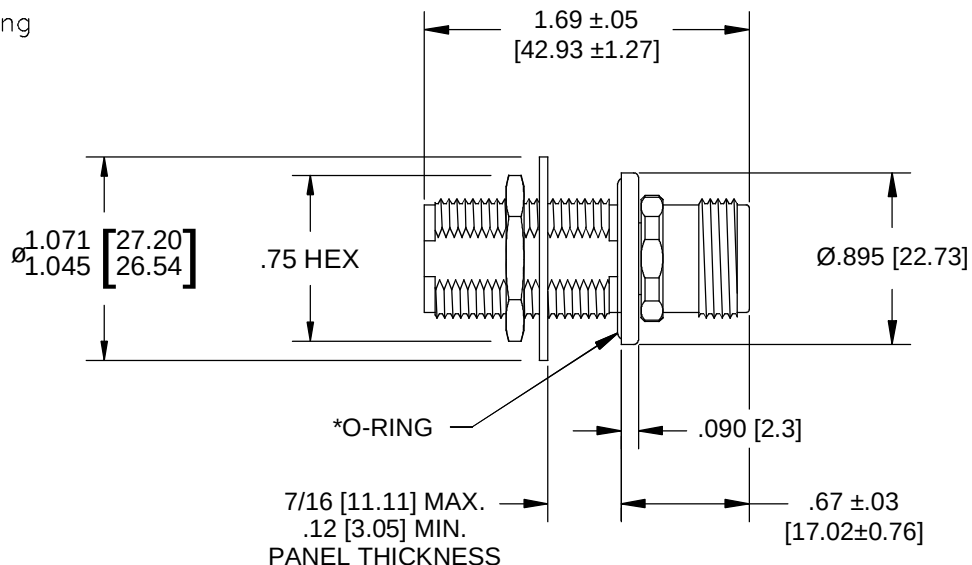

Panel Nut, Lock Washer and O-Ring are Shipped Unassembled.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5208; REV D

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com