




100 - 150 W



Standards
NF C 96-315
MIL-DTL-39030



Impedance	$50 \Omega \pm 2\%$
Frequency	DC - 2.5 GHz
Max VSWR	≤ 1.10 at 1 GHz, ≤ 1.20 at 2 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	100 W
Peak power	10 kW
Weight	1.4 kg

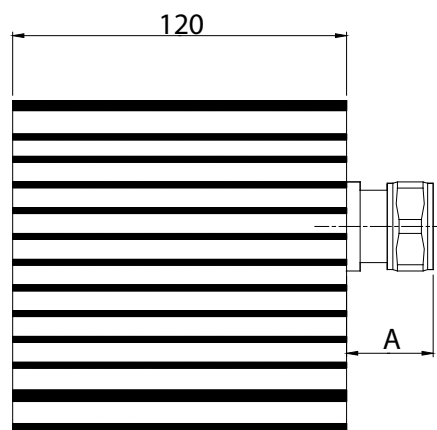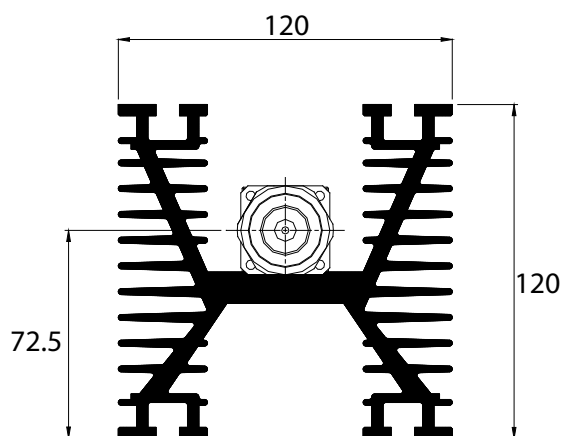

Dimensions in mm

P/N	Connector*	Power (W)	A
17-0196	7-16 m	100	31
17-0238	7-16 f	100	22
17-0239	N m	100	21
17-0213	N f	100	19
17-0580	EIA 7/8 "	100	45
17-0536	N f	150	19

*Others connectors on request

Option	IP 68
--------	-------

DICONEX
Microwave products