




HASCO, INC
COMPONENTS DISTRIBUTOR

5214 Bonsai Street • Moorpark, CA 93021
(888) 498-3242 • sales@hasco-inc.com
www.hasco-inc.com

SMA Attenuators • Male to Female • DC - 6 GHz

Part No: HA6A-XX**

**Replace XX with dB Value

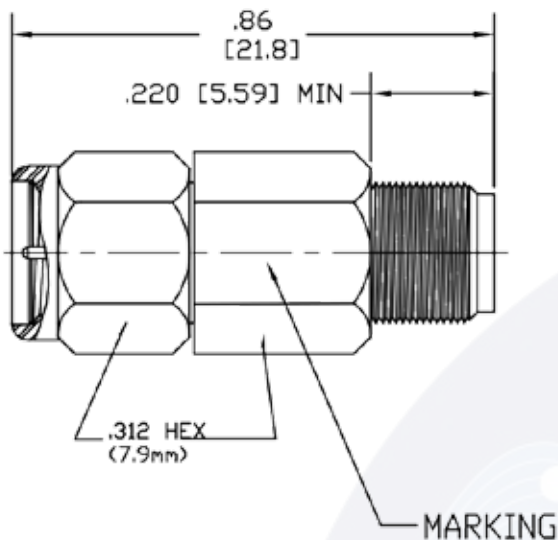

Electrical

- **Frequency Range** DC - 6 GHz
- **Attenuation (dB)**
 - 0.....± 0.3 dB
 - 1 - 6 dB± 0.5 dB
 - 7, 12 & 20 dB ..± 0.5 dB
 - 30 dB± 0.75 dB
- **VSWR**
 - DC - 2.5 GHz....1.15
 - 2.5 - 6 GHz:
 - 0-6 dB1.20
 - 7-12 dB1.25
 - 15, 20 dB.....1.30
 - 30 dB1.35
- **Impedence** 50 Ohms
- **RF Power Nominal** 2 Watts@ 25°C Peak: 200 W
- **Temperature Range** -65°C - +125°C

Materials

- **Housing**
 - Passivated Stainless Steel IAW
 - ASTM-A484 & ASTM-A582,
 - Alloy 303 Cond A
- **Contact**
 - Beryllium Copper
- **Dielectric**
 - High Temperature Plastic Bead
- **Conductor**
 - Gold Plated IAW MIL-PRF-39012