



RF-LAMBDA

The power beyond expectations

RFHB05Mo3GVT




50W 0.5-2GHz 90° Hybrid Coupler

Summary:

- . High power operational up to 50W CW
- . Small compacted package
- . Wide bandwidth, flat frequency response
- . MIL-E-5400 standard

Electrical and Environmental Specifications:

Frequency Range:	0.5-2.0GHz
Insertion Loss:	0.8dB
Isolation:	20dB
Amplitude Unbalance:	± 0.6 dB
Phase unbalance:	± 4.0 degree
Power:	50W CW
VSWR:	1.30 : 1
Operational Temp. Range:	-54°C~+74° C
Storage Temp. Range:	-60°C~+85° C

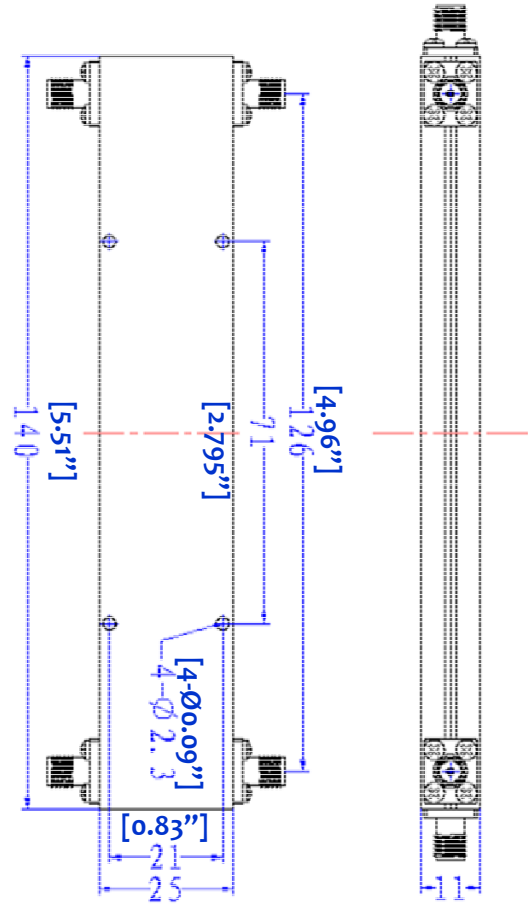

Coaxial 50W 0.5-2GHz 90° Hybrid Coupler

