




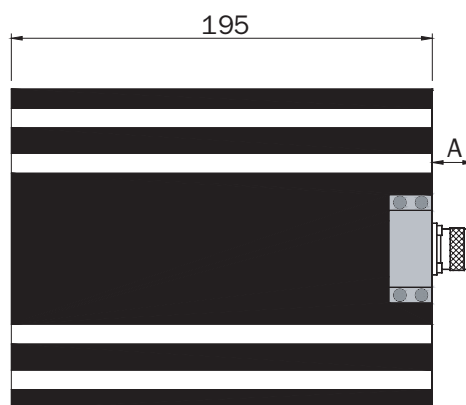

Standards
NF C 96-315
MIL-DTL-39030

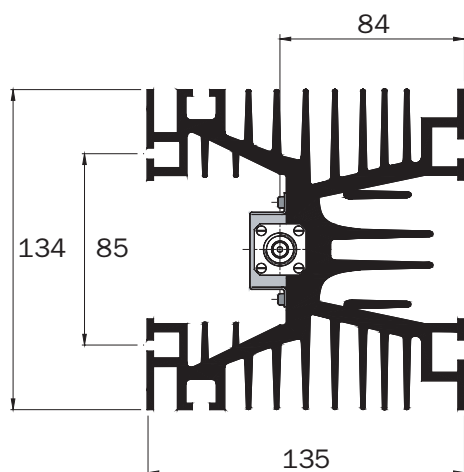

Impedance	50 Ω ± 5%
Frequency	DC - 1 GHz (on request DC - 2.5 Ghz)
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	250 W
Peak power	25 kW
Weight	3 kg



Dimensions in mm

P/N	Connector	A
17-0370	N m	21
17-0371	N f	19
17-0403*	N f	19
17-0401	7-16 m	41
17-0400	7-16 f	31
17-0512*	7-16 f	31

*with thermoswitch 90°C