

Frequency Synthesizer

KSN-2170A-219+

50Ω 2110 to 2170 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801

Product Overview

The KSN-2170A-219+ is a Frequency Synthesizer, designed to operate from 2110 to 2170 MHz for UMTS application. The KSN-2170A-219+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

Key Features

| Feature | Advantages |
|--|--|
| Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -101 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -89 dBc typ.• Reference Spurious: -97 dBc typ. | Low phase noise and spurious improve system EVM (Error Vector Magnitude). |
| Robust design and construction | To enhance the robustness of KSN-2170A-219+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer. |
| Small size, 0.80" x 0.58" x 0.15" | The small size enables the KSN-2170A-219+ to be used in compact designs. |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 2110 to 2170 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+5V)
- Small size 0.80" x 0.58" x 0.15"

Applications

- UMTS

General Description

The KSN-2170A-219+ is a Frequency Synthesizer, designed to operate from 2110 to 2170 MHz for UMTS application. The KSN-2170A-219+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-2170A-219+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



CASE STYLE: DK801

PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Simplified Schematic



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M126018
EDR-7838F1
KSN-2170A-219+
Category-A1
RAV
100323
Page 2 of 10

Electrical Specifications (over operating temperature -35°C to +85°C)

| Parameters | | Test Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|----------------------------|----------------------|--------------------------------------|-------|------|------------------|
| Frequency Range | | - | 2110 | - | 2170 | MHz |
| Step Size | | - | - | 40 | - | kHz |
| Settling Time | | Within ± 1 kHz | - | 8 | - | mSec |
| Output Power | | - | 0 | +2.5 | +5.0 | dBm |
| SSB Phase Noise | | @ 100 Hz offset | - | -68 | - | dBc/Hz |
| | | @ 1 kHz offset | - | -73 | -68 | |
| | | @ 10 kHz offset | - | -101 | -96 | |
| | | @ 100 kHz offset | - | -125 | -121 | |
| | | @ 1 MHz offset | - | -145 | -140 | |
| Reference Spurious Suppression | | Ref. Freq. 15.84 MHz | - | -97 | -73 | dBc |
| Comparison Spurious Suppression | | Step Size 40 kHz | - | -89 | -60 | |
| Non - Harmonic Spurious Suppression | | - | - | -90 | - | |
| Harmonic Suppression | | - | - | -39 | -25 | |
| VCO Supply Voltage | | 5.00 | 4.75 | 5.00 | 5.25 | V |
| PLL Supply Voltage | | 5.00 | 4.75 | 5.00 | 5.25 | |
| VCO Supply Current | | - | - | 27 | 35 | mA |
| PLL Supply Current | | - | - | 23 | 30 | |
| Reference Input (External) | Frequency | 15.84 (square wave) | - | 15.84 | - | MHz |
| | Amplitude | 1 | - | 1 | - | V _{P-P} |
| | Input impedance | - | - | 100 | - | K Ω |
| | Phase Noise @ 1 kHz offset | - | - | -135 | - | dBc/Hz |
| RF Output port Impedance | | - | - | 50 | - | Ω |
| Input Logic Level | Input high voltage | - | 2.85 | - | - | V |
| | Input low voltage | - | - | - | 0.60 | V |
| Digital Lock Detect | Locked | - | 2.80 | - | 3.55 | V |
| | Unlocked | - | - | - | 0.60 | V |
| Frequency Synthesizer PLL | | - | ADF4106 | | | |
| PLL Programming | | - | 3-wire serial 3.3V CMOS | | | |
| Register Map @ 2170 MHz | F_Register | - | (MSB) 100111111000000010010011 (LSB) | | | |
| | N_Register | - | (MSB) 000001101001111100101001 (LSB) | | | |
| | R_Register | - | (MSB) 000100000000011000110000 (LSB) | | | |

Absolute Maximum Ratings

| Parameters | Ratings |
|--|--------------------|
| VCO Supply Voltage | 5.8V |
| PLL Supply Voltage | 5.3V |
| VCO Supply Voltage to PLL Supply Voltage | -0.3V to +5.8V |
| Reference Frequency Voltage | -0.3Vmin, +3.5Vmax |
| Data, Clock, LE Levels | -0.3Vmin, +3.5Vmax |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +100°C |

Permanent damage may occur if any of these limits are exceeded



Typical Performance Data

| FREQUENCY (MHz) | POWER OUTPUT (dBm) | | | VCO CURRENT (mA) | | | PLL CURENT (mA) | | |
|--------------------|-----------------------|-------|-------|---------------------|-------|-------|--------------------|-------|-------|
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| 2110 | 2.72 | 2.58 | 2.17 | 26.19 | 27.48 | 28.41 | 22.26 | 23.67 | 24.96 |
| 2120 | 2.71 | 2.57 | 2.15 | 26.13 | 27.43 | 28.37 | 22.27 | 23.68 | 24.97 |
| 2130 | 2.71 | 2.56 | 2.13 | 26.07 | 27.38 | 28.34 | 22.27 | 23.68 | 24.98 |
| 2140 | 2.74 | 2.58 | 2.14 | 26.00 | 27.32 | 28.30 | 22.27 | 23.69 | 24.99 |
| 2150 | 2.81 | 2.65 | 2.19 | 25.95 | 27.27 | 28.26 | 22.28 | 23.69 | 24.99 |
| 2160 | 2.80 | 2.65 | 2.17 | 25.90 | 27.23 | 28.23 | 22.28 | 23.69 | 24.99 |
| 2170 | 2.77 | 2.62 | 2.14 | 25.85 | 27.19 | 28.20 | 22.28 | 23.69 | 24.99 |

| FREQUENCY (MHz) | HARMONICS (dBc) | | | | | |
|--------------------|-----------------|--------|--------|--------|--------|--------|
| | F2 | | | F3 | | |
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| 2110 | -51.50 | -57.50 | -47.07 | -36.71 | -38.14 | -41.62 |
| 2120 | -52.99 | -56.90 | -46.96 | -35.59 | -35.83 | -40.10 |
| 2130 | -56.20 | -52.42 | -46.54 | -35.22 | -36.66 | -40.82 |
| 2140 | -57.82 | -51.01 | -46.13 | -33.11 | -35.18 | -40.45 |
| 2150 | -54.57 | -51.04 | -46.46 | -34.61 | -37.21 | -41.20 |
| 2160 | -51.21 | -53.34 | -47.75 | -35.01 | -38.27 | -42.80 |
| 2170 | -50.26 | -57.75 | -49.23 | -35.73 | -39.62 | -43.62 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS +25°C | | | | |
|--------------------|---|--------|---------|---------|---------|
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2110 | -67.92 | -74.99 | -101.09 | -125.68 | -145.94 |
| 2120 | -67.74 | -74.28 | -100.93 | -125.77 | -144.67 |
| 2130 | -74.87 | -74.52 | -100.99 | -125.58 | -145.74 |
| 2140 | -66.70 | -74.87 | -101.02 | -125.34 | -145.56 |
| 2150 | -63.84 | -73.42 | -101.05 | -125.03 | -145.36 |
| 2160 | -66.49 | -72.62 | -100.73 | -124.82 | -145.19 |
| 2170 | -74.88 | -72.69 | -100.91 | -124.74 | -145.34 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS -40°C | | | | |
|--------------------|---|--------|---------|---------|---------|
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2110 | -72.41 | -73.40 | -101.56 | -125.69 | -146.15 |
| 2120 | -73.01 | -72.94 | -101.10 | -125.73 | -145.78 |
| 2130 | -70.08 | -74.77 | -101.07 | -125.68 | -146.08 |
| 2140 | -70.54 | -73.18 | -100.70 | -125.38 | -145.65 |
| 2150 | -73.70 | -74.35 | -100.20 | -125.30 | -145.55 |
| 2160 | -72.31 | -74.46 | -100.32 | -125.17 | -145.57 |
| 2170 | -74.00 | -72.55 | -100.32 | -125.11 | -145.45 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS +85°C | | | | |
|--------------------|---|--------|---------|---------|---------|
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2110 | -73.24 | -74.80 | -100.85 | -125.07 | -145.16 |
| 2120 | -75.15 | -75.06 | -101.23 | -124.76 | -144.51 |
| 2130 | -68.17 | -74.38 | -100.64 | -124.73 | -145.07 |
| 2140 | -73.68 | -74.06 | -100.26 | -124.58 | -144.70 |
| 2150 | -78.09 | -73.65 | -100.57 | -124.36 | -144.48 |
| 2160 | -71.83 | -75.71 | -100.11 | -124.16 | -144.44 |
| 2170 | -71.56 | -73.63 | -100.52 | -124.25 | -144.62 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

| COMPARISON SPURIOUS ORDER | COMPARISON SPURIOUS @Fcarrier 2110MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 2140MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 2170MHz+(n*Fcomparison) (dBc) note 1 | | |
|---------------------------------|---|---------|---------|---|---------|---------|---|---------|---------|
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| -5 | -111.98 | -101.50 | -103.14 | -97.21 | -105.94 | -109.99 | -100.07 | -103.64 | -107.48 |
| -4 | -106.91 | -103.55 | -95.98 | -99.54 | -95.62 | -96.80 | -96.65 | -100.64 | -106.36 |
| -3 | -100.88 | -99.32 | -100.32 | -103.95 | -98.04 | -99.05 | -104.64 | -106.53 | -103.92 |
| -2 | -96.99 | -97.12 | -97.82 | -101.63 | -94.20 | -93.33 | -83.24 | -80.77 | -84.35 |
| -1 | -88.45 | -88.15 | -87.12 | -88.56 | -87.51 | -83.21 | -86.89 | -89.50 | -79.51 |
| 0 ^{note 2} | - | - | - | - | - | - | - | - | - |
| +1 | -88.22 | -88.52 | -81.85 | -88.69 | -91.24 | -83.35 | -88.45 | -89.87 | -79.67 |
| +2 | -95.98 | -97.24 | -95.11 | -101.28 | -95.56 | -92.05 | -82.92 | -81.24 | -82.76 |
| +3 | -100.13 | -100.51 | -101.16 | -103.32 | -96.42 | -98.03 | -105.46 | -108.91 | -104.34 |
| +4 | -103.38 | -104.65 | -93.38 | -97.72 | -96.62 | -92.66 | -99.78 | -101.33 | -108.76 |
| +5 | -106.96 | -101.36 | -100.45 | -99.02 | -102.54 | -106.88 | -102.00 | -106.01 | -108.98 |

Note 1: Comparison frequency 40 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

| REFERENCE SPURIOUS ORDER | REFERENCE SPURIOUS @Fcarrier 2110MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 2140MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 2170MHz+(n*Freference) (dBc) note 3 | | |
|--------------------------------|---|---------|---------|---|---------|---------|---|---------|---------|
| | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C | -40°C | +25°C | +85°C |
| -5 | -131.76 | -131.25 | -127.08 | -122.43 | -128.52 | -130.08 | -131.55 | -130.47 | -128.11 |
| -4 | -121.21 | -123.09 | -121.94 | -122.53 | -126.14 | -122.60 | -115.91 | -118.75 | -118.98 |
| -3 | -124.05 | -130.61 | -130.54 | -125.04 | -131.11 | -130.06 | -120.38 | -127.63 | -129.28 |
| -2 | -120.26 | -124.00 | -120.29 | -109.08 | -109.99 | -114.58 | -119.67 | -118.00 | -121.71 |
| -1 | -100.56 | -100.51 | -98.57 | -101.90 | -98.21 | -92.15 | -94.80 | -94.82 | -115.55 |
| 0 ^{note 4} | - | - | - | - | - | - | - | - | - |
| +1 | -93.78 | -93.70 | -91.93 | -92.15 | -91.11 | -94.45 | -110.83 | -107.13 | -102.39 |
| +2 | -117.40 | -120.24 | -126.62 | -119.58 | -120.36 | -121.21 | -112.52 | -109.80 | -116.98 |
| +3 | -112.60 | -117.36 | -121.38 | -114.96 | -120.56 | -122.73 | -116.11 | -123.09 | -127.14 |
| +4 | -112.69 | -114.06 | -113.70 | -112.20 | -114.17 | -116.34 | -116.95 | -116.45 | -114.78 |
| +5 | -120.00 | -123.64 | -122.75 | -115.32 | -122.42 | -125.39 | -126.71 | -131.30 | -127.36 |

Note 3: Reference frequency 15.84 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Curves

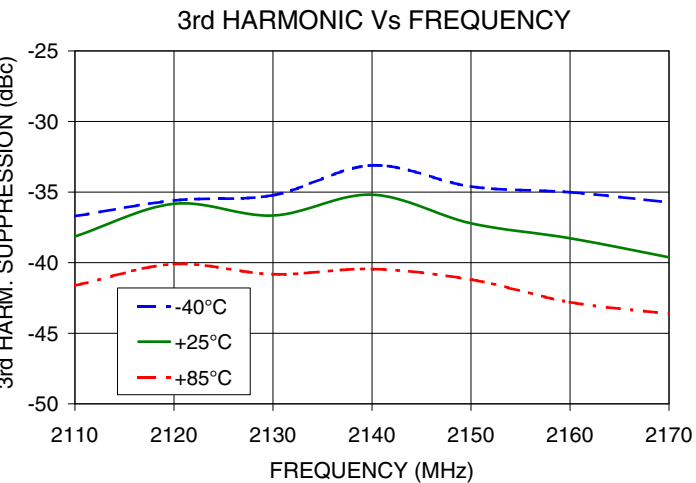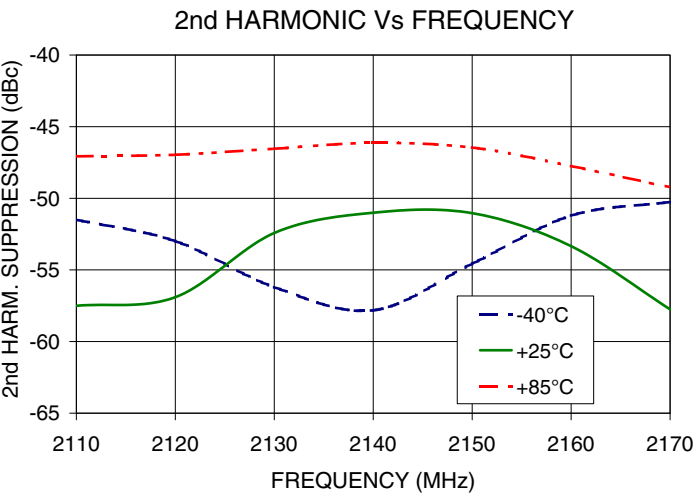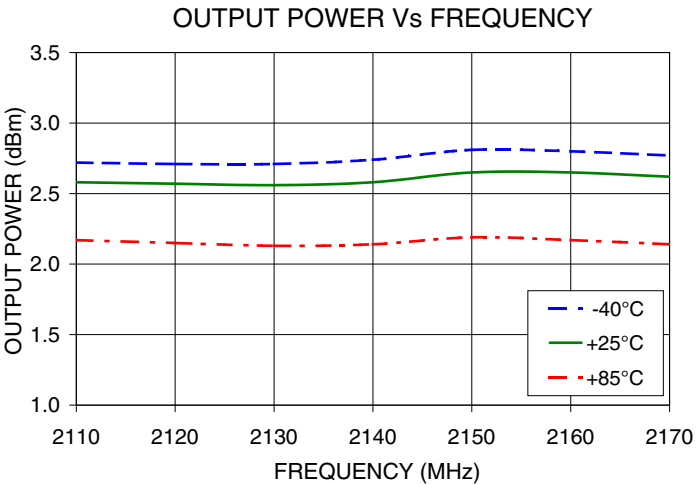

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


PHASE NOISE @100Hz offset

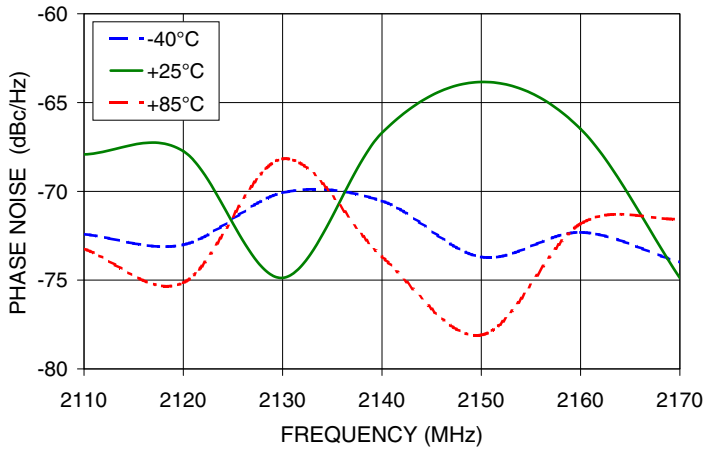


PHASE NOISE @1kHz offset

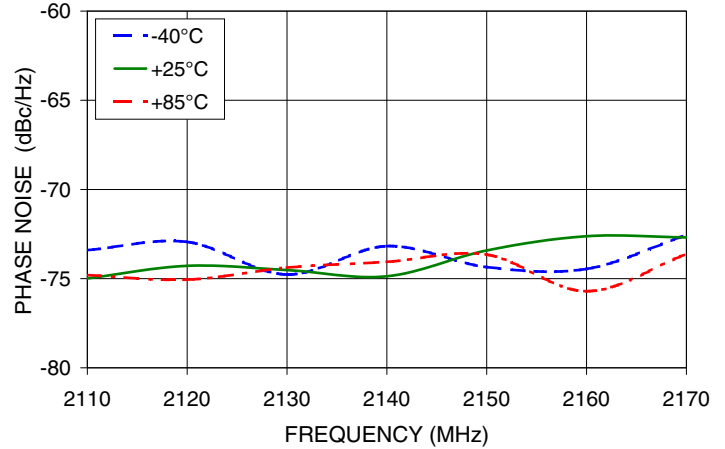


PHASE NOISE @10kHz offset

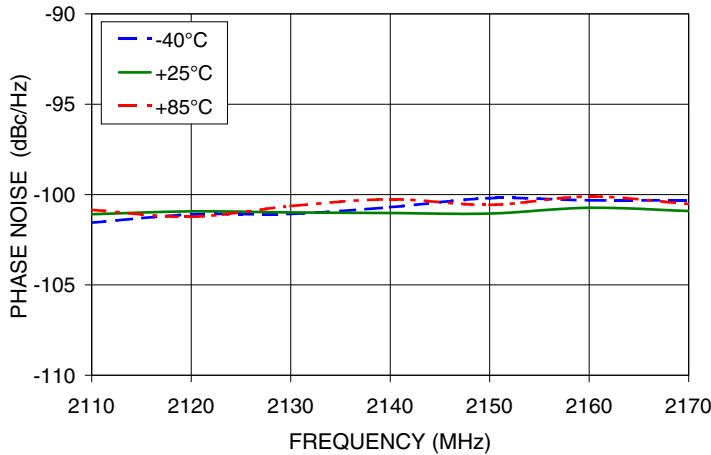

PHASE NOISE @100kHz offset

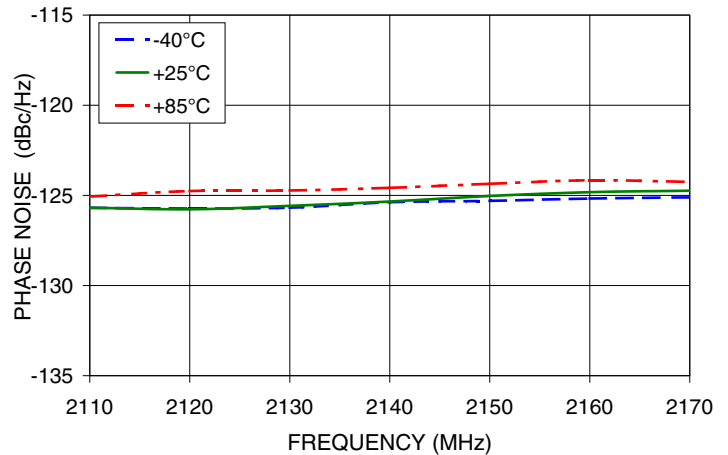

PHASE NOISE @1MHz offset

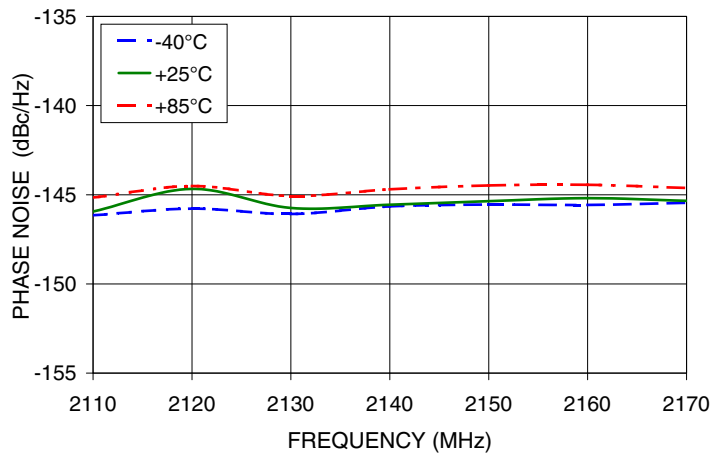







IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

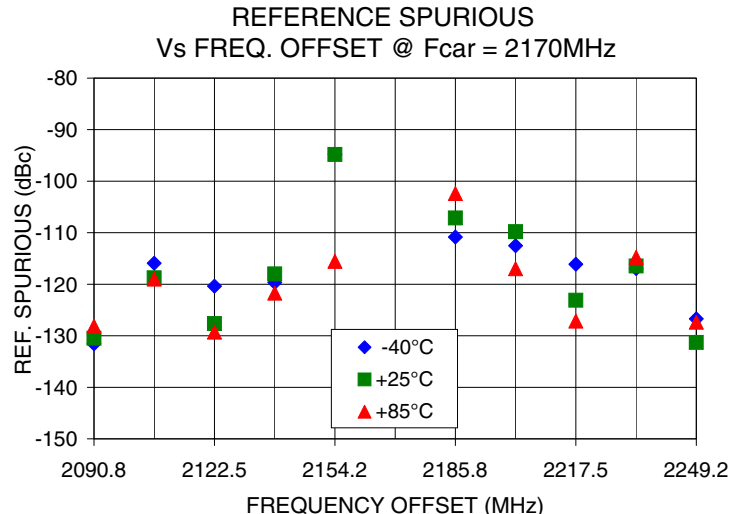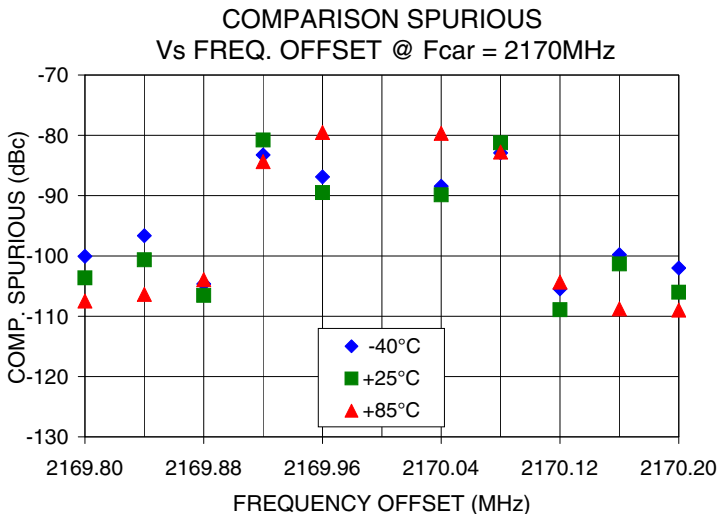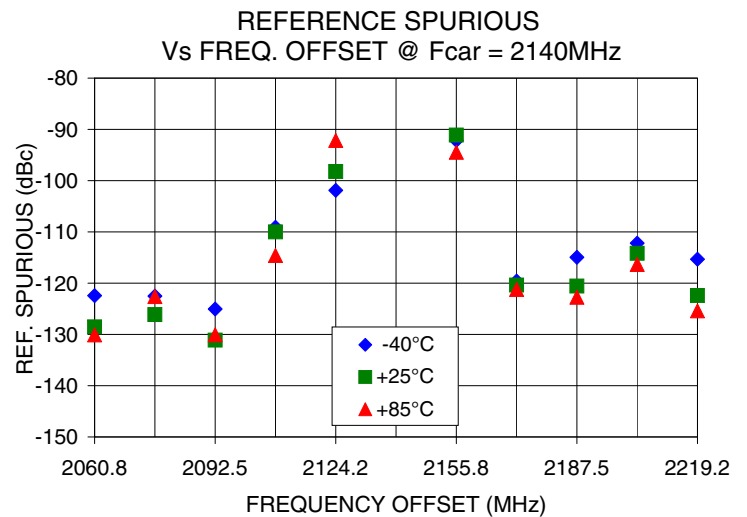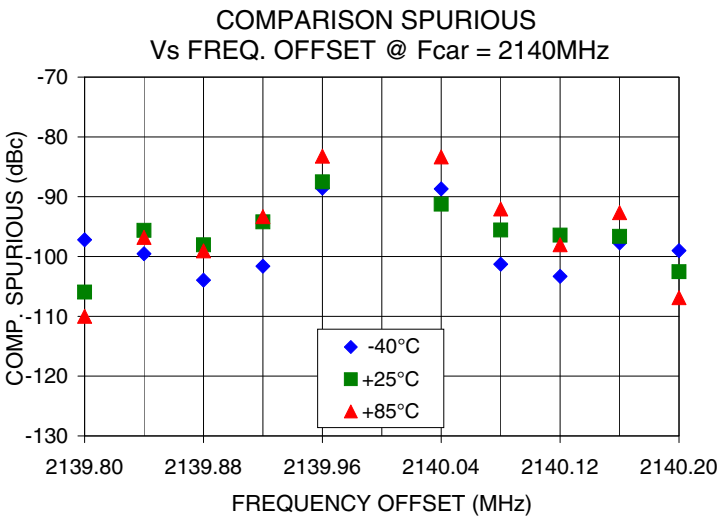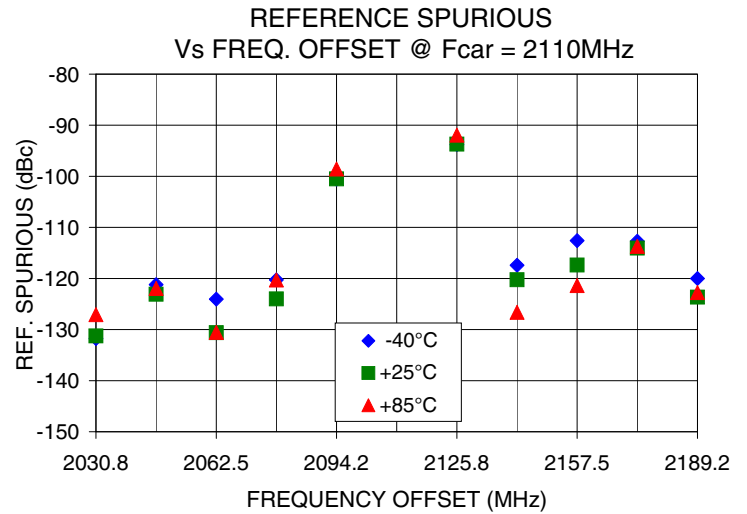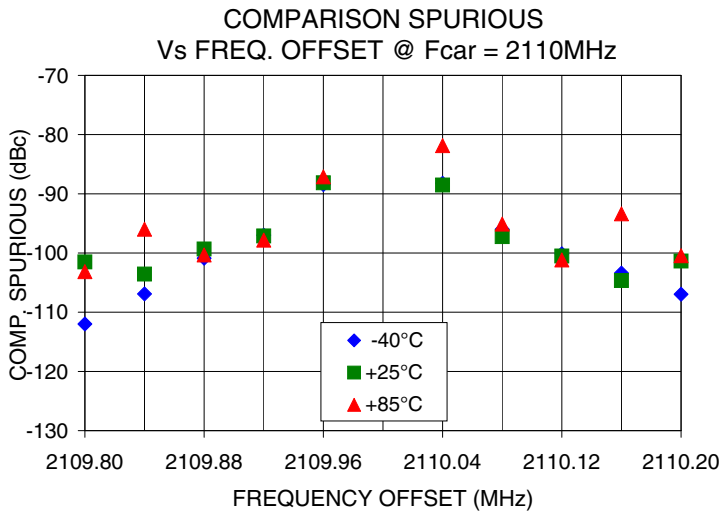

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

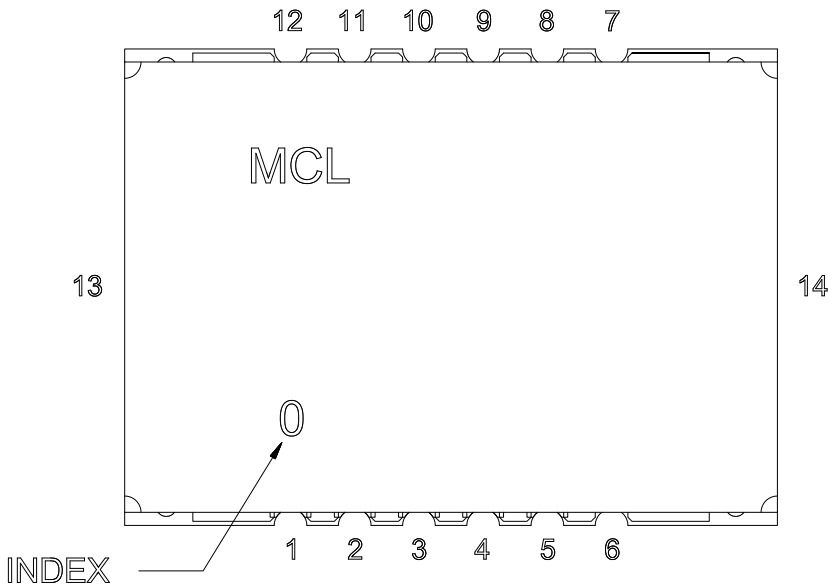


Pin Connection


| Pin Number | Function |
|------------|----------|
| 1 | VCC PLL |
| 2 | GND |
| 3 | REF IN |
| 4 | GND |
| 5 | VCC VCO |
| 6 | GND |
| 7 | RF OUT |
| 8 | GND |
| 9 | LOCK DET |
| 10 | CLOCK |
| 11 | DATA |
| 12 | LE |
| 13 | GND |
| 14 | GND |

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

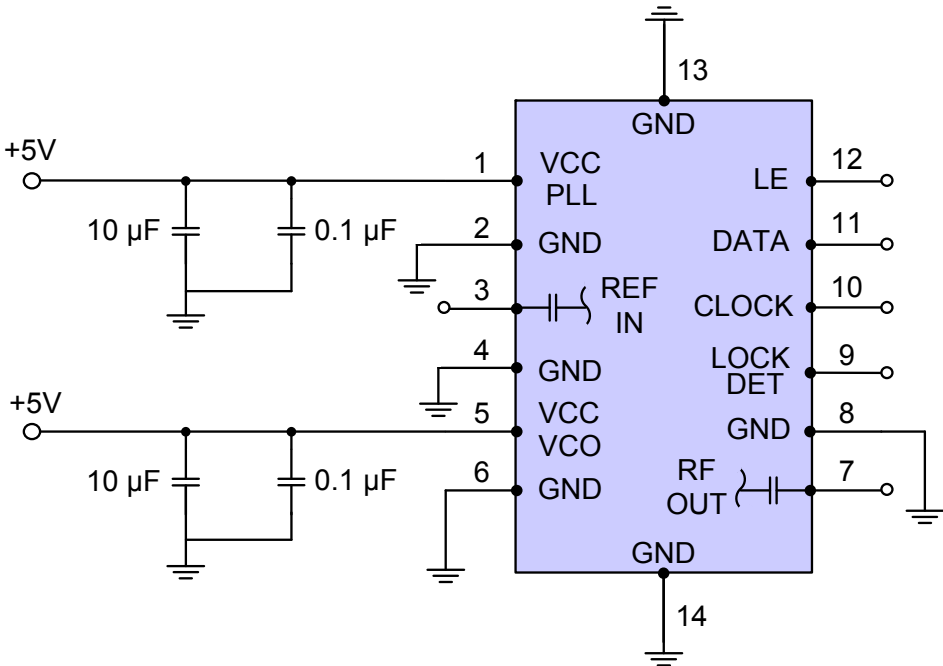

Device Marking

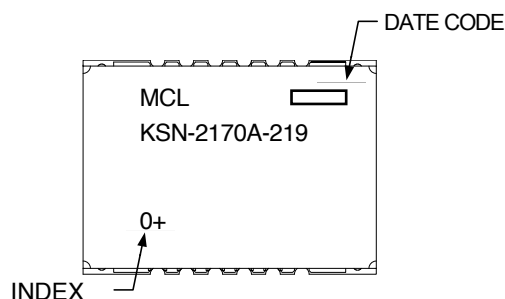**Additional Detailed Technical Information**

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK801

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567+

Environment Ratings: ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.