

ADAPTERS, BETWEEN SERIES TYPE N / TNC

UP TO 18 GHz
FLANGE MOUNT

api 
technologies corp.
INMET

MODELS: 5326, 5327, 5328 & 5329

SPECIFICATIONS:


Electrical:

Frequency Range _____ DC – 18 GHz
Standard Freq. Values _____ 6* & 18 GHz
VSWR
DC – 4 GHz _____ 1.04:1 Max.
4 – 8 GHz _____ 1.07:1 Max.
8 – 18 GHz _____ 1.12:1 Max.
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C


Mechanical:

Connectors _____ Passivated Stainless Steel
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper

*For DC – 6 GHz Units add -067 to the Model Number

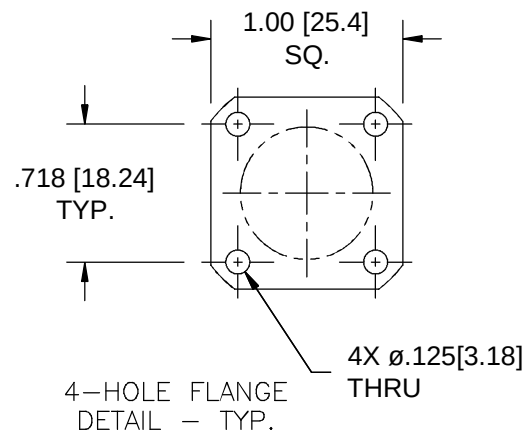


Model Number: **5326**
Type N Male / TNC Male
Length: 1.82 ±.06 [46.2 ±1.5]
As Pictured

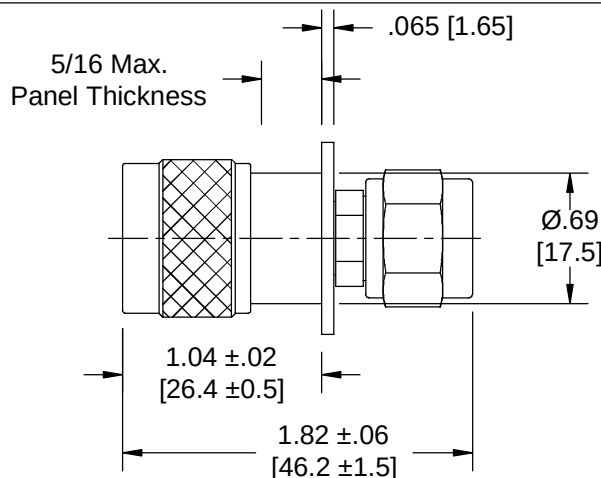

Model Number: **5327**
Type N Male / TNC Female
Length: 1.80 ±.05 [45.7 ±1.3]
Not Shown

Model Number: **5328**
Type N Female / TNC Male
Length: 1.84 ±.05 [46.7 ±1.3]
Not Shown

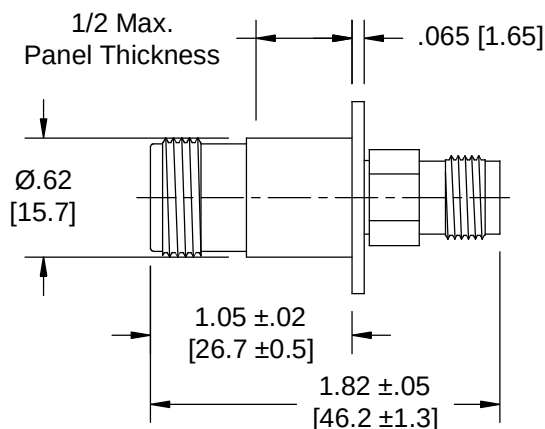

Model Number: **5329**
Type N Female / TNC Female
Length: 1.82 ±.05 [46.2 ±1.3]
As Pictured

HOW TO ORDER:

Model Number: **532X-YYY**

Base Number _____ Frequency Range
_____ = DC – 18 GHz
067 = DC – 6 GHz

Ordering Examples:

Model Number: **5329**
DC – 18 GHz; Type N Fem/TNC Fem

Model Number: **5326-067**
DC – 6 GHz; Type N Male/TNC Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5326; REV A

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com