



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com


Product Specifications Approval Sheet

Product Description: SAW Filter 2436 MHz SMD 1.4X1.1 mm (BW=72MHz)

TST Part No.: TA1218A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 7, 19, 2011

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 2436MHz

MODEL NO.:TA1218A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)


B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance : $Z_s = 50 \Omega$

Terminating load impedance : $Z_L = 50 \Omega$

Item	Unit	Min.	Type.	Max.	Note
Center Frequency F_c	MHz	-	2436	-	-
Insertion Loss (2400~2472 MHz) at 25°C IL	dB	-	3	3.5	-
Insertion Loss (2400~2472 MHz)	dB	-	3.5	4.4	-
Amplitude ripple (2400~2472 MHz) at 25°C	dB	-	1.5	2.1	-
Amplitude ripple (2400~2472 MHz)	dB	-	2	3.3	-
VSWR (2400~2472 MHz)		-	2.1	2.5	-
Attenuation (Reference level from 0 dB)					
DC~960 MHz	dB	25	35	-	-
960~1580 MHz	dB	25	33	-	-
1710~1990 MHz	dB	25	34	-	-
2110~2170 MHz	dB	28	37	-	-
2496~2690 MHz at 25°C	dB	30	40	-	-
2496~2690 MHz	dB	10	20	-	-
2690~4800 MHz	dB	25	44	-	-
4800~5000 MHz	dB	20	36	-	-
5000~6000 MHz	dB	15	31	-	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-	-


C.OUTLINE DRAWING:

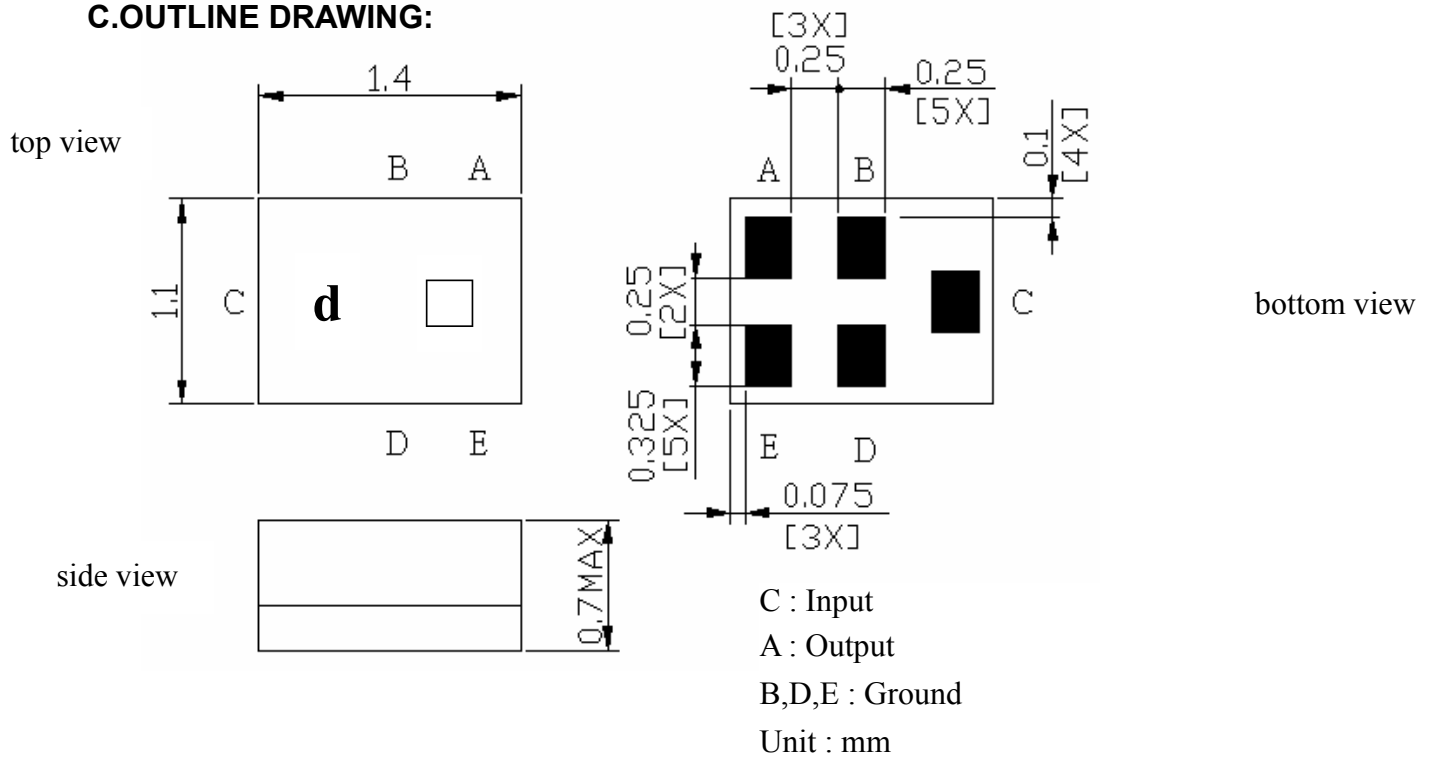


□ : Year/Month Code (Follow the table)

Year/Month	1	2	3	4	5	6	7	8	9	10	11	12
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011	A	B	C	D	E	F	G	H	J	K	L	M
2012	N	P	Q	R	S	T	U	V	W	X	Y	Z
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z

D. MEASUREMENT CIRCUIT:



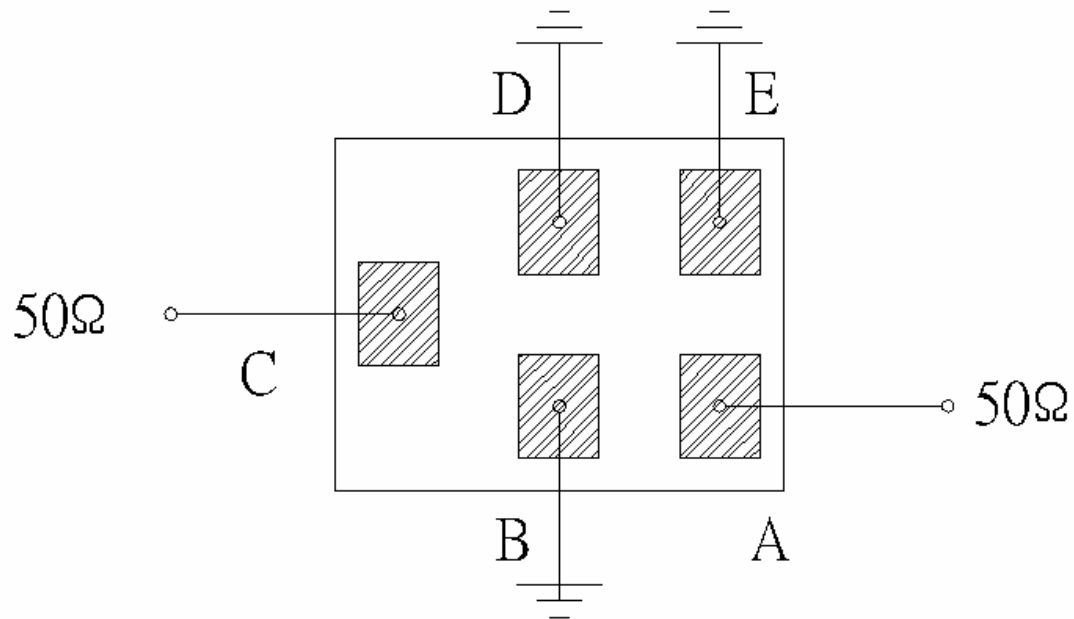


E. PCB Footprint:

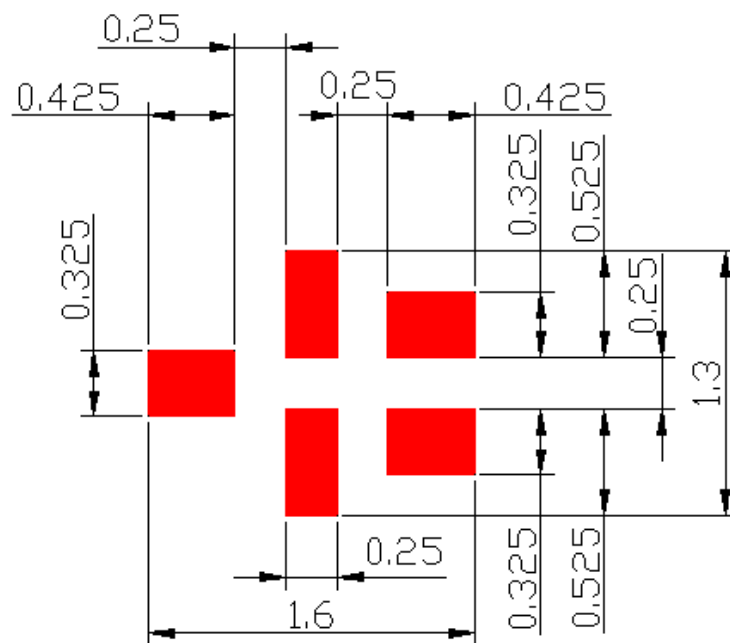


: Land Pattern
Unit : mm

F. Frequency Characteristics :

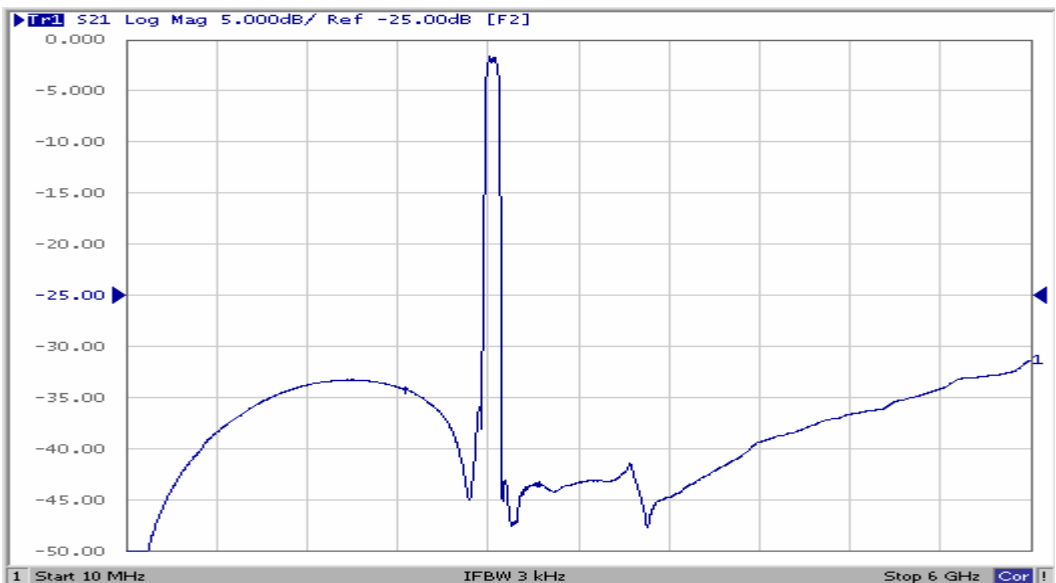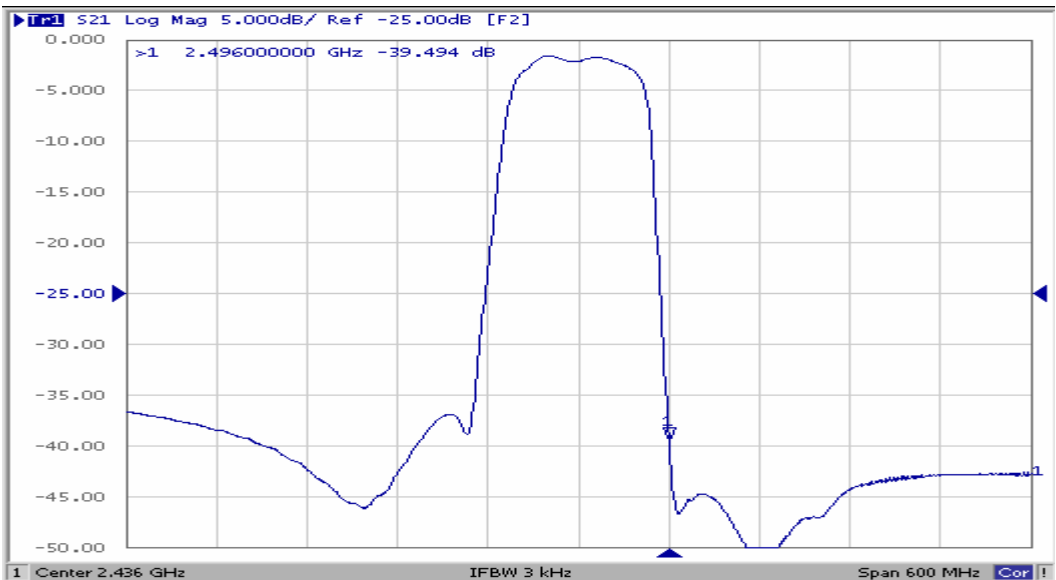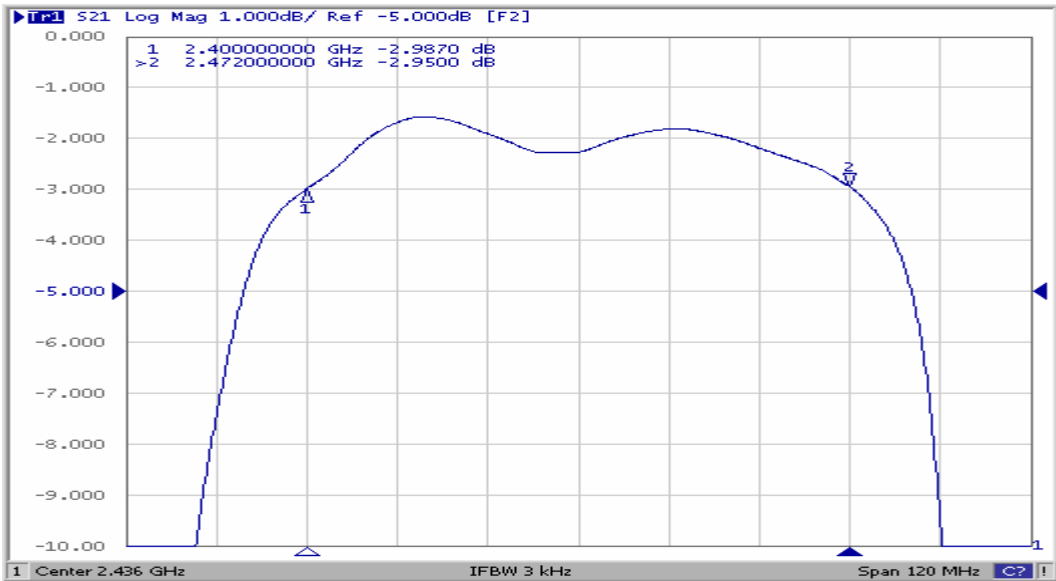


Reflection Functions :

S11

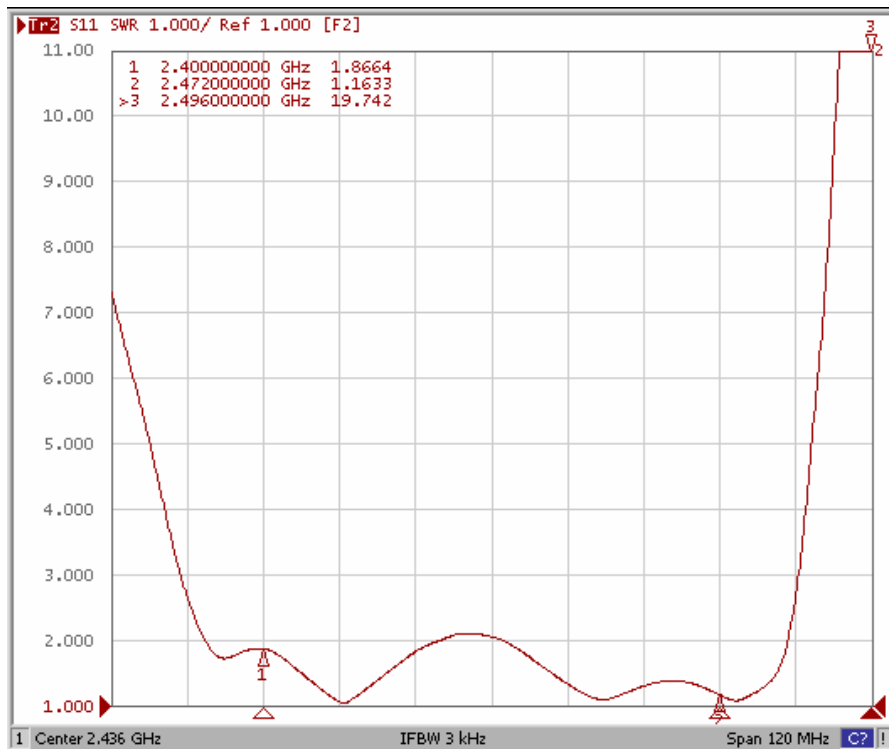


S22

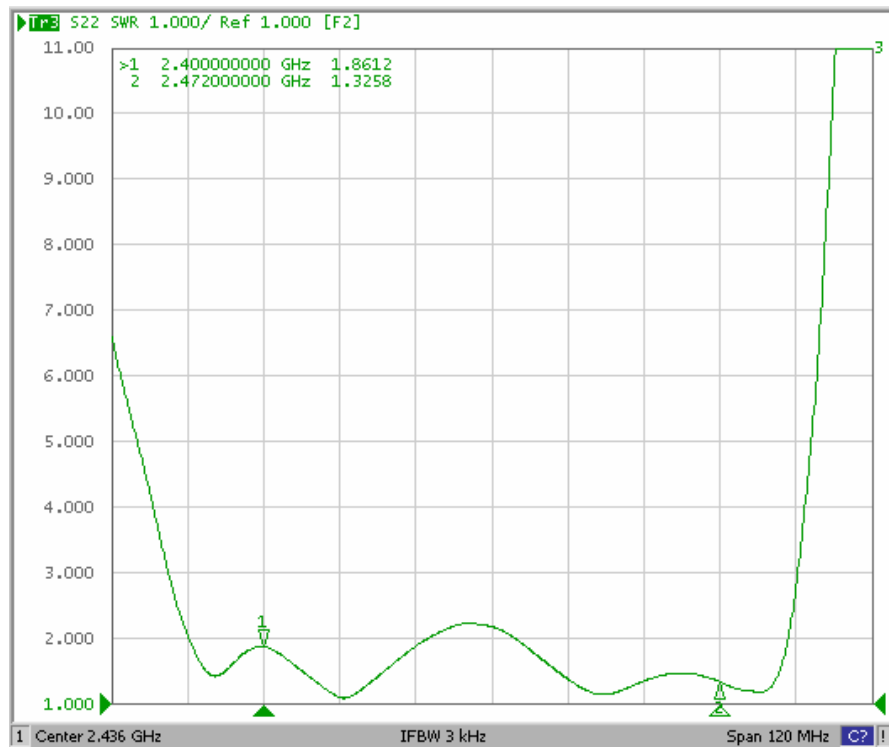


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=2000)

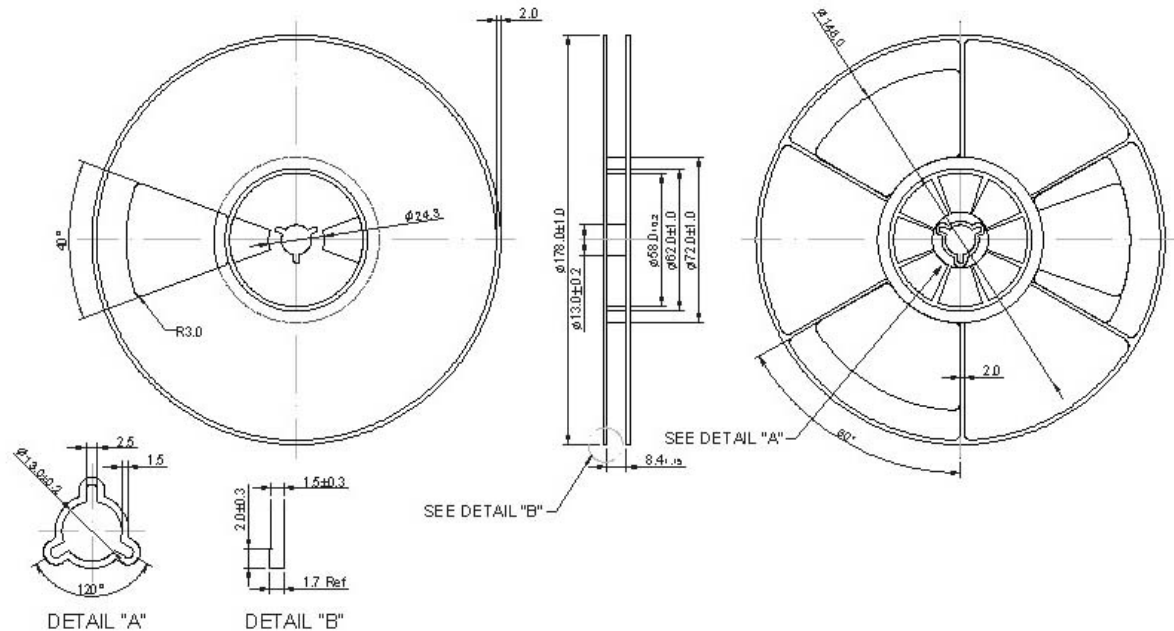

2. TAPE DIMENSION

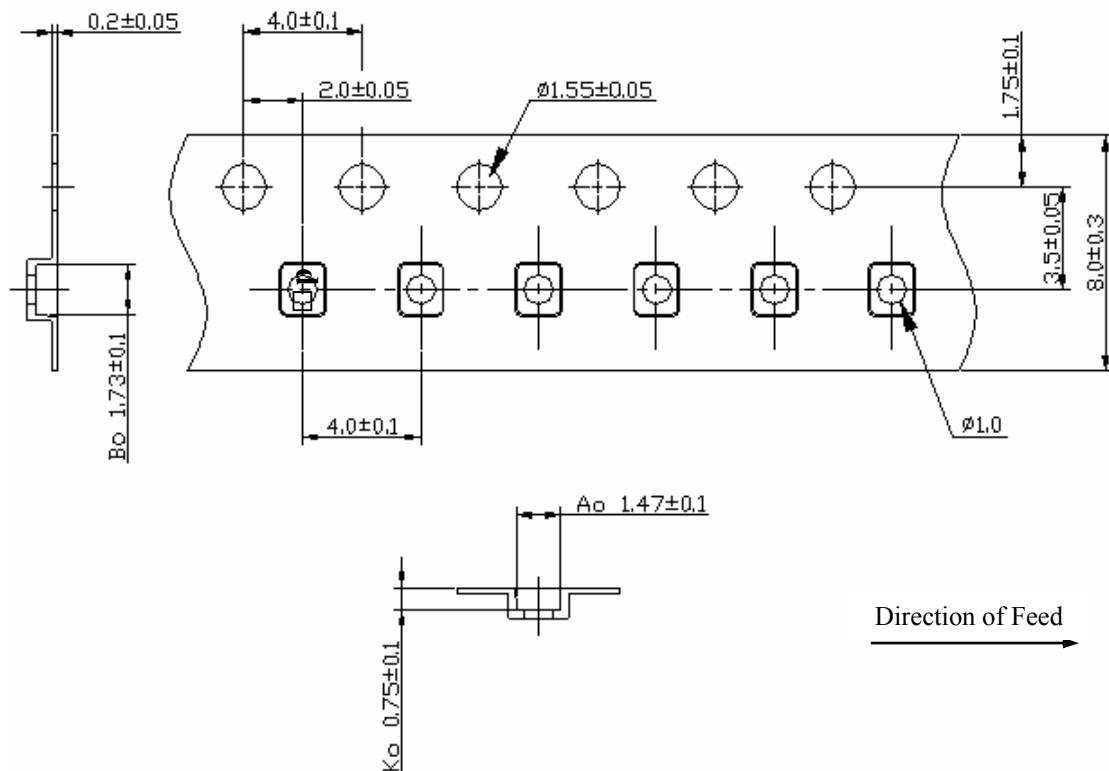

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 250±10°C peak (max. 10sec).
4. Time : 2 times.

