


Features

- No Programming Required
- Subminiature Size (0.5"x0.5"x0.12")
- Low Phase Noise

Applications

- Base station
- Cable TV
- Satellite Communications
- UHF radio link

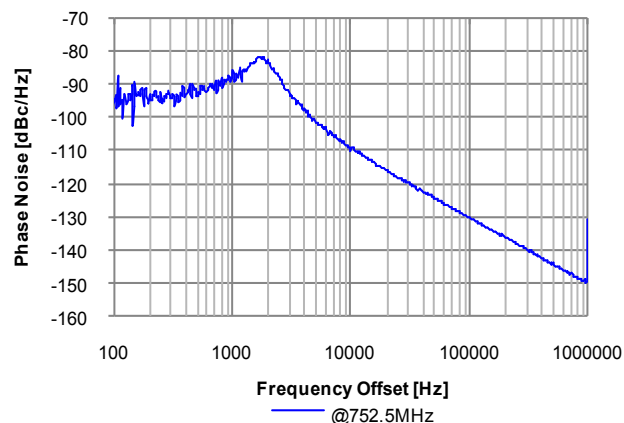


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Fixed Frequency	MHz	-	752.50	-
Output Power	dBm	+2.0	+4.0	+6.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset		-88	-83
	@10kHz offset		-108	-103
	@100kHz offset		-128	-123
	@1MHz offset		-132	-127
2nd Harmonic Suppression	dBc		-30	-20
Sideband Spurious Suppression	dBc			-75
Reference	Input Frequency	MHz	10	
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	24	30
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

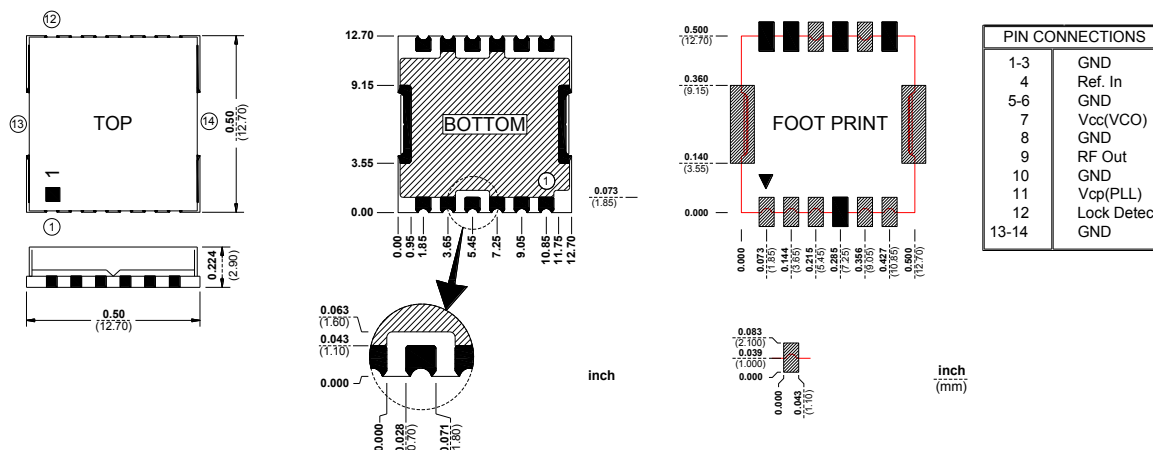

PACKAGE DRAWING : PG12-L

Harmonic Suppression

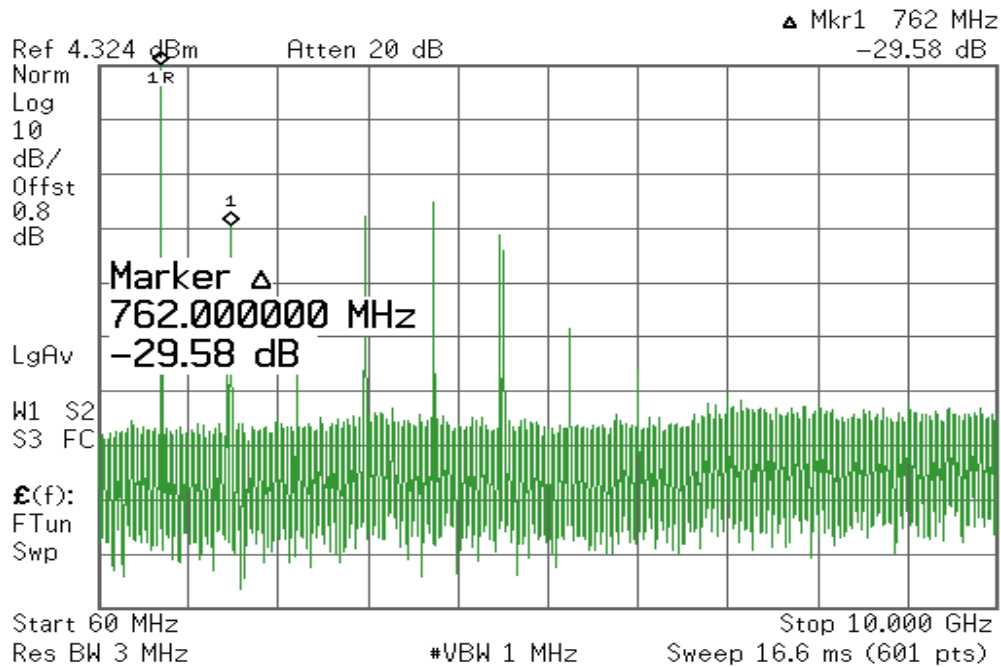

Sideband Spurious Suppression

