


# 856691

## 140 MHz SAW Filter


### Applications

- Wireless infrastructure
- Microwave communications IF filtering
- General purpose IF

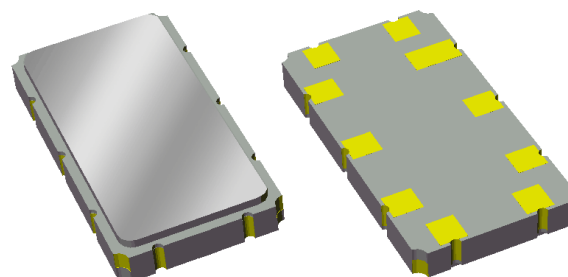


### Functional Block Diagram SE/SE

Top View

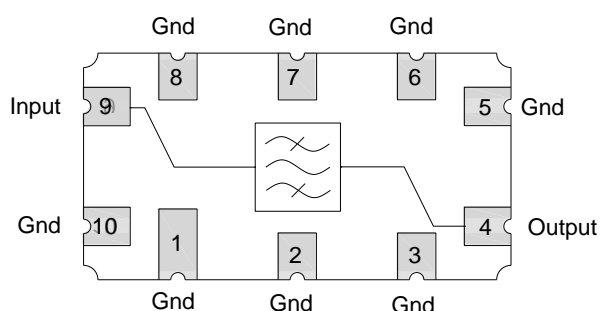


### Functional Block Diagram Bal/SE

Top view

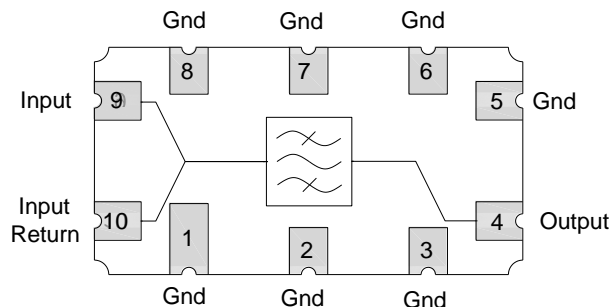

### Product Features

- Usable bandwidth 1.5 MHz
- High attenuation
- Balanced or Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Dimensions: 9.1 x 4.8 x 1.24 mm
- Hermetic **RoHS** compliant, **Pb-free** 

### General Description

856691 is a 1.5MHz bandwidth filter which is part of TriQuint's 140MHz center frequency family for use in IF filtering for various channelized communication systems.

Housed in a hermetic surface mount package, 856691 offers low insertion loss, constant group delay, and good input power handling capability.

856691 offers an excellent choice for narrowband selection for communication systems.

### Pin Configuration

Pin # SE/SE	Description
9	Input
10	Ground
4	Output
5	Ground
1,2,3,6,7,8	Case Ground

Pin # Balanced/SE	Description
9	Input +
10	Input -
4	Output
5	Ground
1,2,3,6,7,8	Case Ground

### Ordering Information

Part No.	Description
856691	packaged part
856691-EVB	evaluation board

Standard T/R size = 4000 units/reel.

## Specifications

### Electrical Specifications <sup>(1)</sup>

Specified Temperature Range: <sup>(2)</sup> -40 to +85 °C

Parameter <sup>(3)</sup>	Conditions	Min	Typical <sup>(4)</sup>	Max	Units
Center Frequency		-	140	-	MHz
Minimum Insertion Loss	139.25 – 140.75 MHz	-	12.1	14	dB
Amplitude Variation	139.25 – 140.75 MHz	-	0.6	1.2	dB p-p
Phase Linearity	139.25 – 140.75 MHz	-	3.2	10	° p-p
Group Delay Variation	139.25 – 140.75 MHz	-	74	180	ns p-p
Relative Attenuation <sup>(5)</sup>	10 – 137 MHz	40	47	-	dB
	143 – 280 MHz	40	48	-	dB
Source Impedance (single-ended or balanced) <sup>(6)</sup>		-	50	-	Ω
Load Impedance (single-ended) <sup>(6)</sup>		-	50	-	Ω

Notes:

1. All specifications are based on the TriQuint schematic for the main reference design shown on pages 3 and 5
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. Relative to minimum insertion loss
6. This is the optimum impedance in order to achieve the performance shown


### Absolute Maximum Ratings

Parameter	Rating
Operating Temperature	-40 to +85 °C
Storage Temperature	-55 to +125 °C
Pyroelectric Voltage	50 mV p-p
Input Power	+20 dBm

Operation of this device outside the parameter ranges given above may cause permanent damage.

### Reference Design 1 – 50Ω SE Input, 50Ω SE Output


#### Schematic

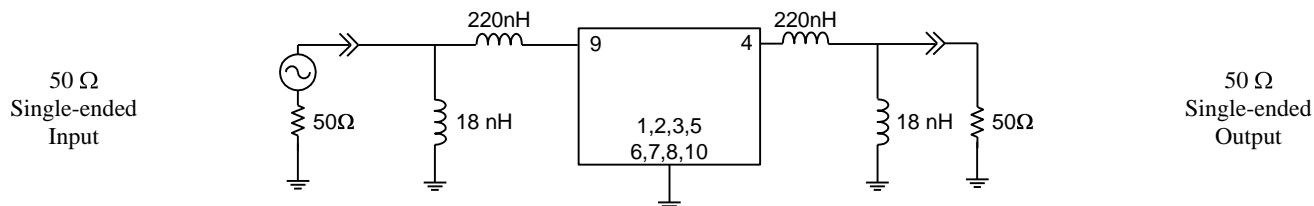

#### Notes:

1. Actual matching values may vary due to PCB layout and parasitic


#### PC Board

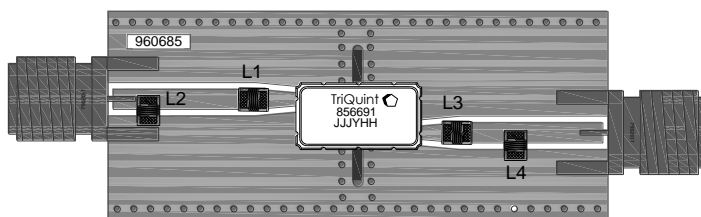

#### Notes:

- Top, middle & bottom layers: 1 oz copper
- Substrates: FR4 dielectric, .031" thick
- Finish plating: Nickel: 3-8μm thick, Gold: .03-.2μm thick
- Hole plating: Copper min .0008μm thick

#### Mounting Configuration

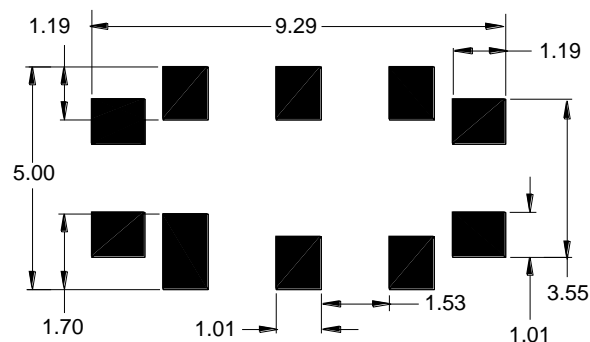

#### Notes:

1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.







#### Bill of Material

Reference Desg.	Value	Description	Manufacturer	Part Number
L1	18 nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-180XJBC
L2	220 nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-221XJBC
L3	220 nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-221XJBC
L4	18 nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-180XJBC
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960685

# 856691


## 140 MHz SAW Filter

### Typical Performance 1- 50Ω SE Input, 50Ω SE Output (at room temperature)

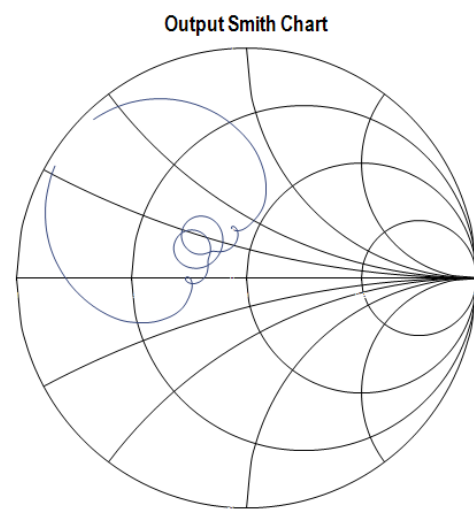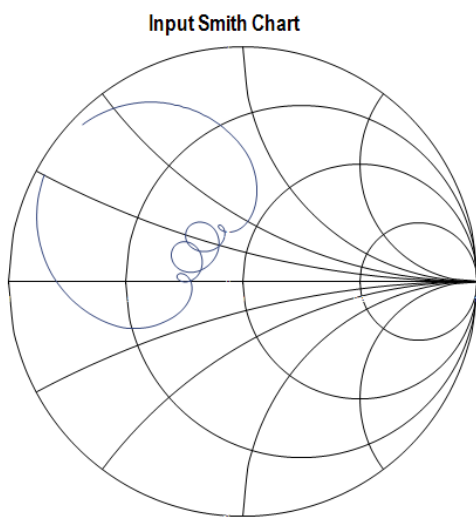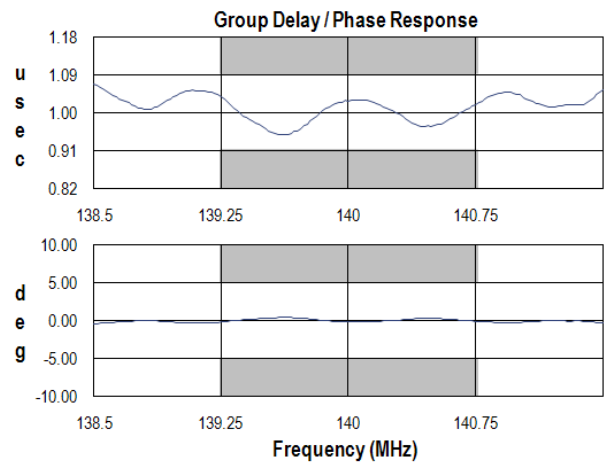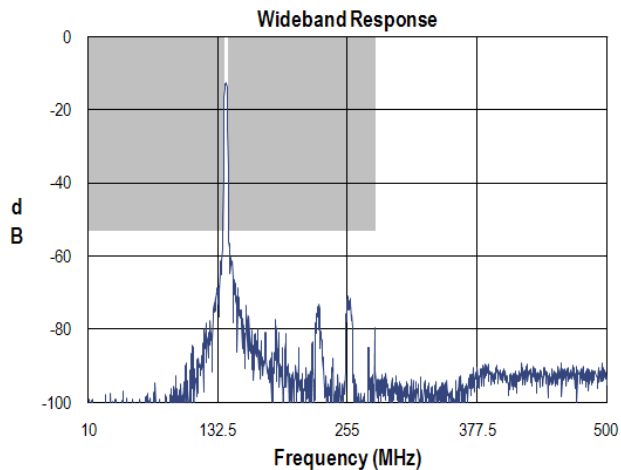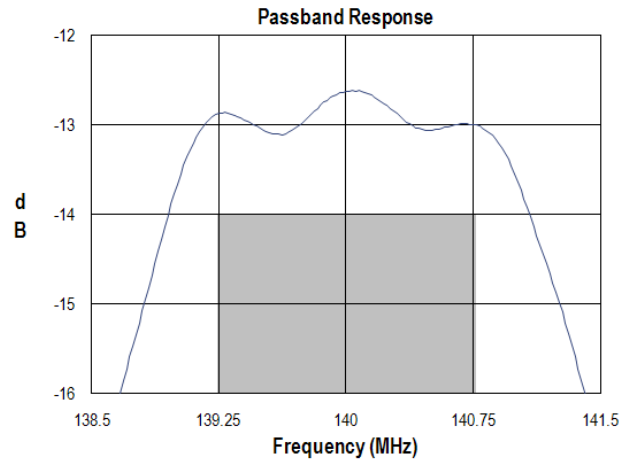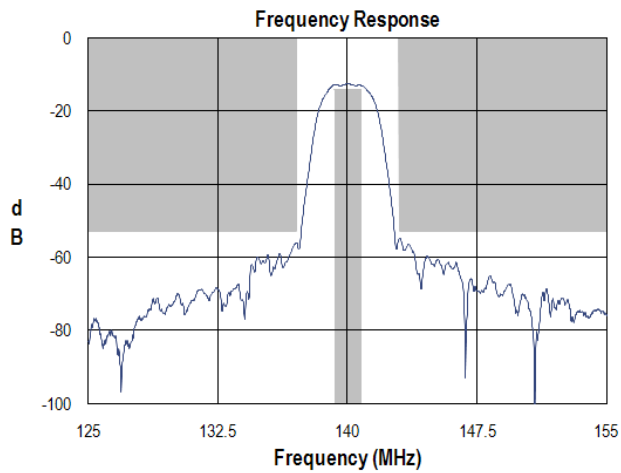

### Reference Design 2 – 50Ω Balanced Input, 50Ω Single-ended output


#### Schematic

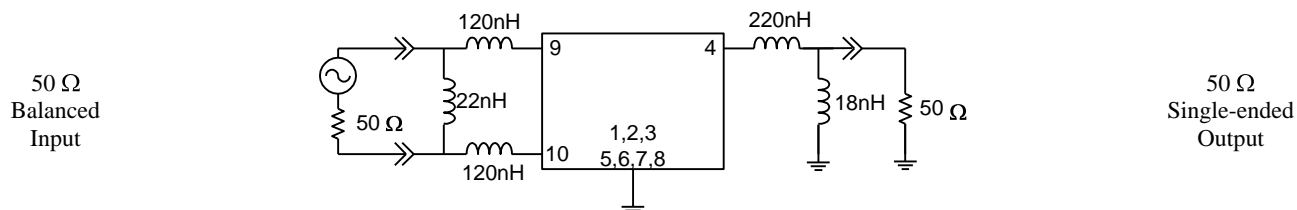

#### Notes:

1. Actual matching values may vary due to PCB layout and parasitic


#### PC Board

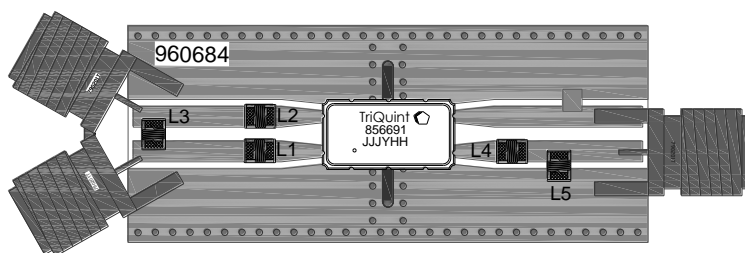

#### Notes:

- 3-layer board - top, middle & bottom layer: 1 oz copper
- Substrates: .031" thick FR4 dielectric.
- Finish plating: Nickel: 3-8μm thick, Gold: .03-.2μm thick
- Hole plating: Copper min .0008μm thick

#### Mounting Configuration

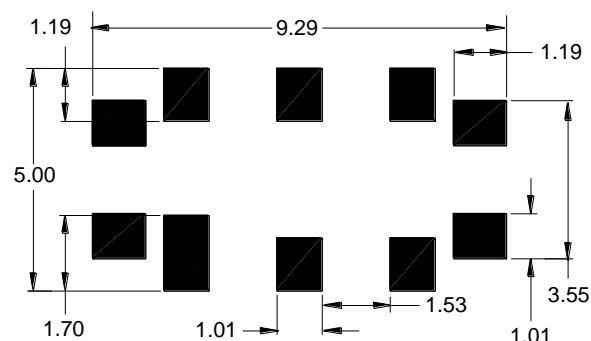

#### Notes:

1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.







#### Bill of Material

Reference Desg.	Value	Description	Manufacturer	Part Number
L1	22nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-220XJBC
L2	120nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-121XJBC
L3	120nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-121XJBC
L4	220nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-221XJBC
L5	18nH	Coil Wire-wound, 0805, 5%	Coilcraft	0805CS-180XJBC
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960684

# 856691


## 140 MHz SAW Filter

### Typical Performance 2- 50Ω Bal Input, 50Ω SE Output (at room temperature)

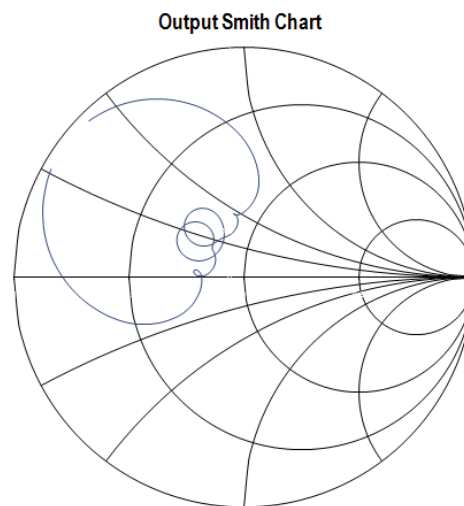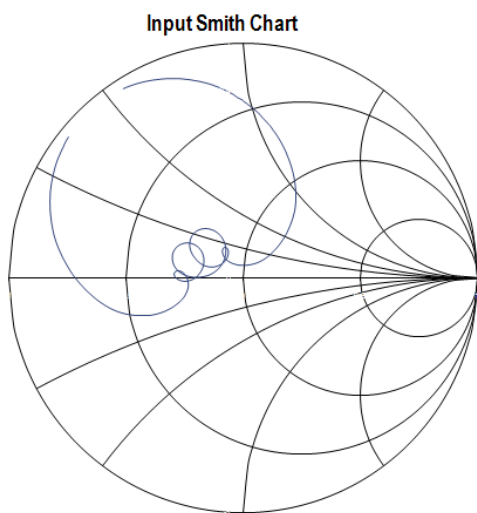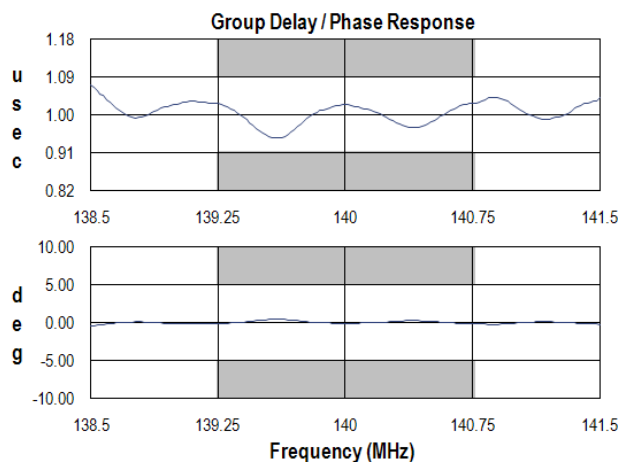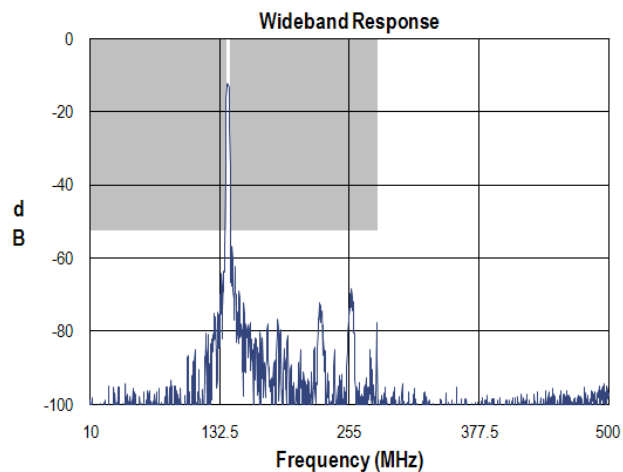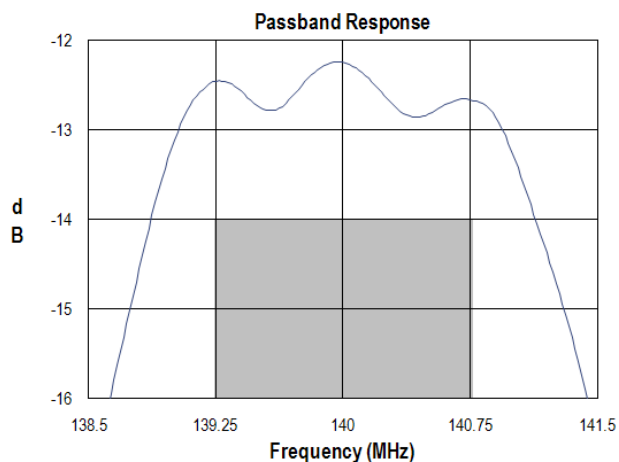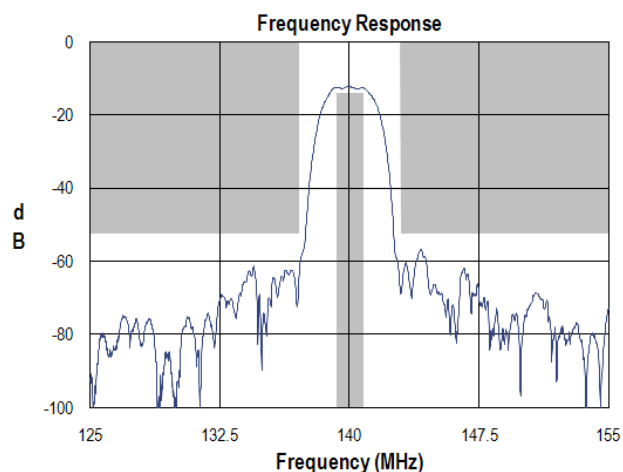

### Mechanical Information

#### Package Information, Dimensions and Marking

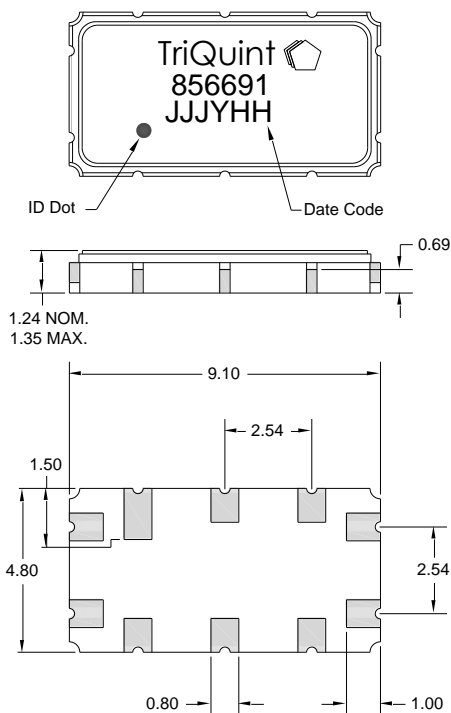

Package Style: SMP-35C  
Dimensions: 9.1 x 4.8 x 1.24 mm



Body:  $Al_2O_3$  ceramic  
Lid: Kovar, Ni plated  
Terminations: Au plating 0.5 - 1.0  $\mu$ m, over a 2-6  $\mu$ m Ni plating

All dimensions shown are nominal in millimeters  
All tolerances are  $\pm 0.15$  mm except overall length and width  $\pm 0.10$  mm

The date code consists of: day of the current year (Julian, 3 digits), Y = last digit of the year (1 digit), and HH = hour (2 digits)

### Tape and Reel Information

Standard T/R size = 4000 units/reel. All dimensions are in millimeters

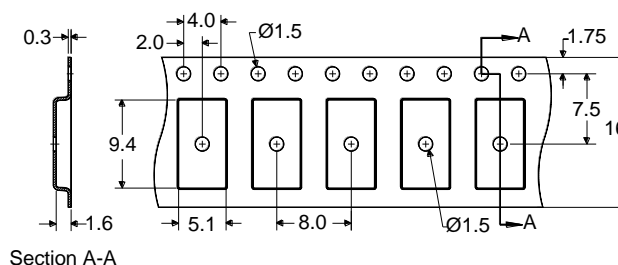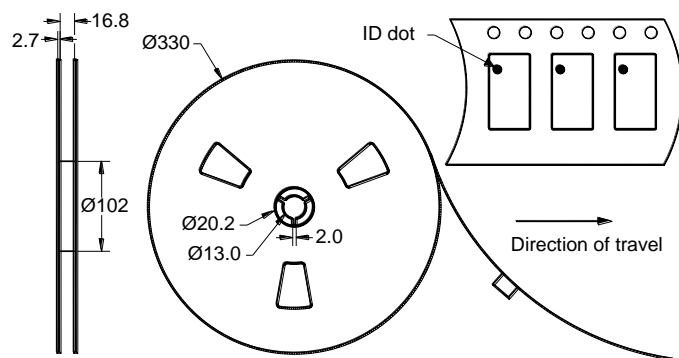

## Product Compliance Information

### ESD Information



#### Caution! ESD-Sensitive Device

ESD Rating: 1C

Value: Passes  $\geq 1000$  V min.  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JESD22-A114

ESD Rating: C

Value: Passes  $\geq 500$  V min.  
Test: Machine Model (MM)  
Standard: JEDEC Standard JESD22-A115

### MSL Rating

Devices are Hermetic, therefore MSL is not applicable

### Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ( $C_{15}H_{12}Br_4O_2$ ) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)  
Email: [info-sales@tqs.com](mailto:info-sales@tqs.com)

Tel: +1.407.886.8860  
Fax: +1.407.886.7061

For technical questions and application information:

Email: [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.