


Uncontrolled Drawing

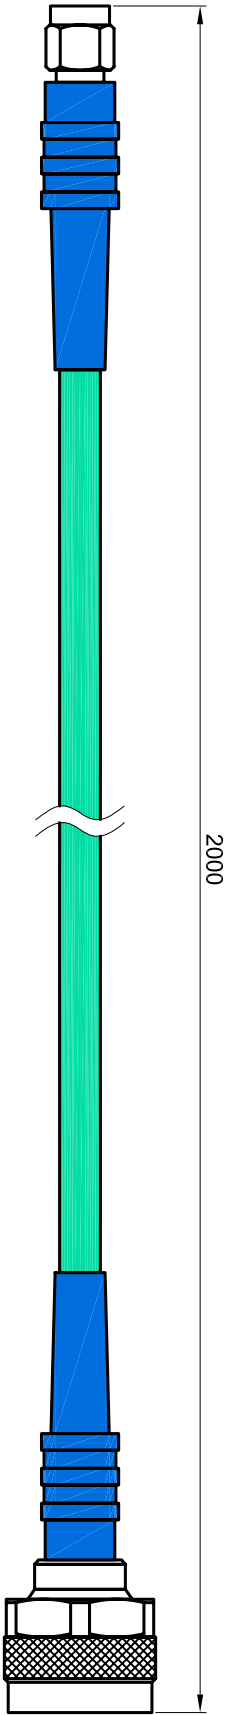

Type SMA male

Type N male

Specification:

- 1. Model: MC06-01-03-2000
- 2. Nominal Impedance: 50Ω
- 3. Frequency Range: DC-6GHz, up to 8GHz
- 4. Insertion Loss: 1.35dB@DC-1GHz, 2.25dB@1-3GHz, 3.35dB@3-6GHz, 4.10dB@6-8GHz
- 5. VSWR: 1.15@DC-1GHz, 1.20@1-3GHz, 1.25@3-6GHz, 1.30@6-8GHz
- 6. Length: 2m
- 7. Connector: SMA male to N male
- 8. Power CW: 166W@6GHz

参 考 号	修 改	制 图 / 校 核 / 审 核 / 材 料 检 查 表			图 号	505.0314
材 料	DESIGNED _ZYY.SHU	校 对	CHECKED _ZH	审 核 - 日 期	文 件 名	FILENAME
				APPROVED _	日 期	10/12/7
BXT Technologies			Test Cable Assembly			
RF Technologies			MC06-01-03-2000			
Tel:0591-83789500			第 1 版			
www.bxt-technologies.cn			EDITION			
			SHEET			