



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 402-1
RECOMMENDED MATING TORQUE	20 IN-LBS. NOM.
COUPLING NUT PROOF TORQUE	25 IN-LBS. MIN.
COUPLING NUT RETENTION	100 LBS. MIN.
FORCE TO ENGAGE	6 IN-LBS. MAX.
FORCE TO DISENGAGE	6 IN-LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (BOTH DIRECTIONS)	6 LBS. MIN.
CABLE RETENTION	20 LBS. MIN.
MASS	40 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms. NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
INSERTION LOSS	0.045√ F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1800 Vrms MIN.
INSULATION RESISTANCE	5000 Mega Ohms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB
CORONA	450 Vrms. MIN. @ 70,000 FEET
RF HIGH POTENTIAL	1200 Vrms. MIN.
CONTACT RESISTANCE (INNER)	1.0 Milli Ohms MAX.
CONTACT RESISTANCE (OUTER)	0.2 Milli Ohms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65°C TO +165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIAL AND FINISH	
CONTACT	BERYLLIUM COPPER, UNS NO. C17300, PER ASTM-B-196 GOLD PLATE PER MIL-G-45204, 50 MICROINCH MIN., OVER NICKEL PLATE PER QQ-N-290, 50 MICROINCHES THK. MIN.
INSULATOR	POLYPHENYLENESULFIDE (PPS) PER ASTM-D-6358.
FRONT / REAR BODY, COUPLING NUT, CLAMP NUT	STEEL, CORROSION RESISTANT, CONDITION A, NON-MAGNETIC PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
SNAP RING	BERYLLIUM COPPER, UNS NO. 17200, PER ASTM-B-197
CONTACT RING	BRASS, TEMPER H02, PER ASTM-B-16 UNS NO. C36000 GOLD PLATE PER MIL-G-45204, 50 MICROINCHES MIN., OVER NICKEL PLATE PER QQ-N-290, 50 MICROINCHES MIN.
APPLICATION	
CABLE(S)	205A SERIES CABLE
INSTALLATION	PER CONFIGURATOR

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	05/16/05	SRS	SRS

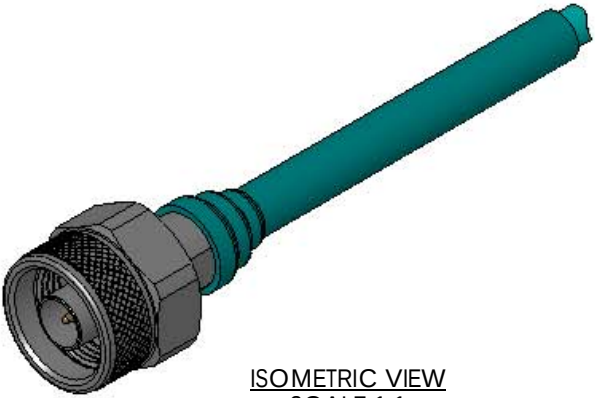

ISOMETRIC VIEW
SCALE 1:1

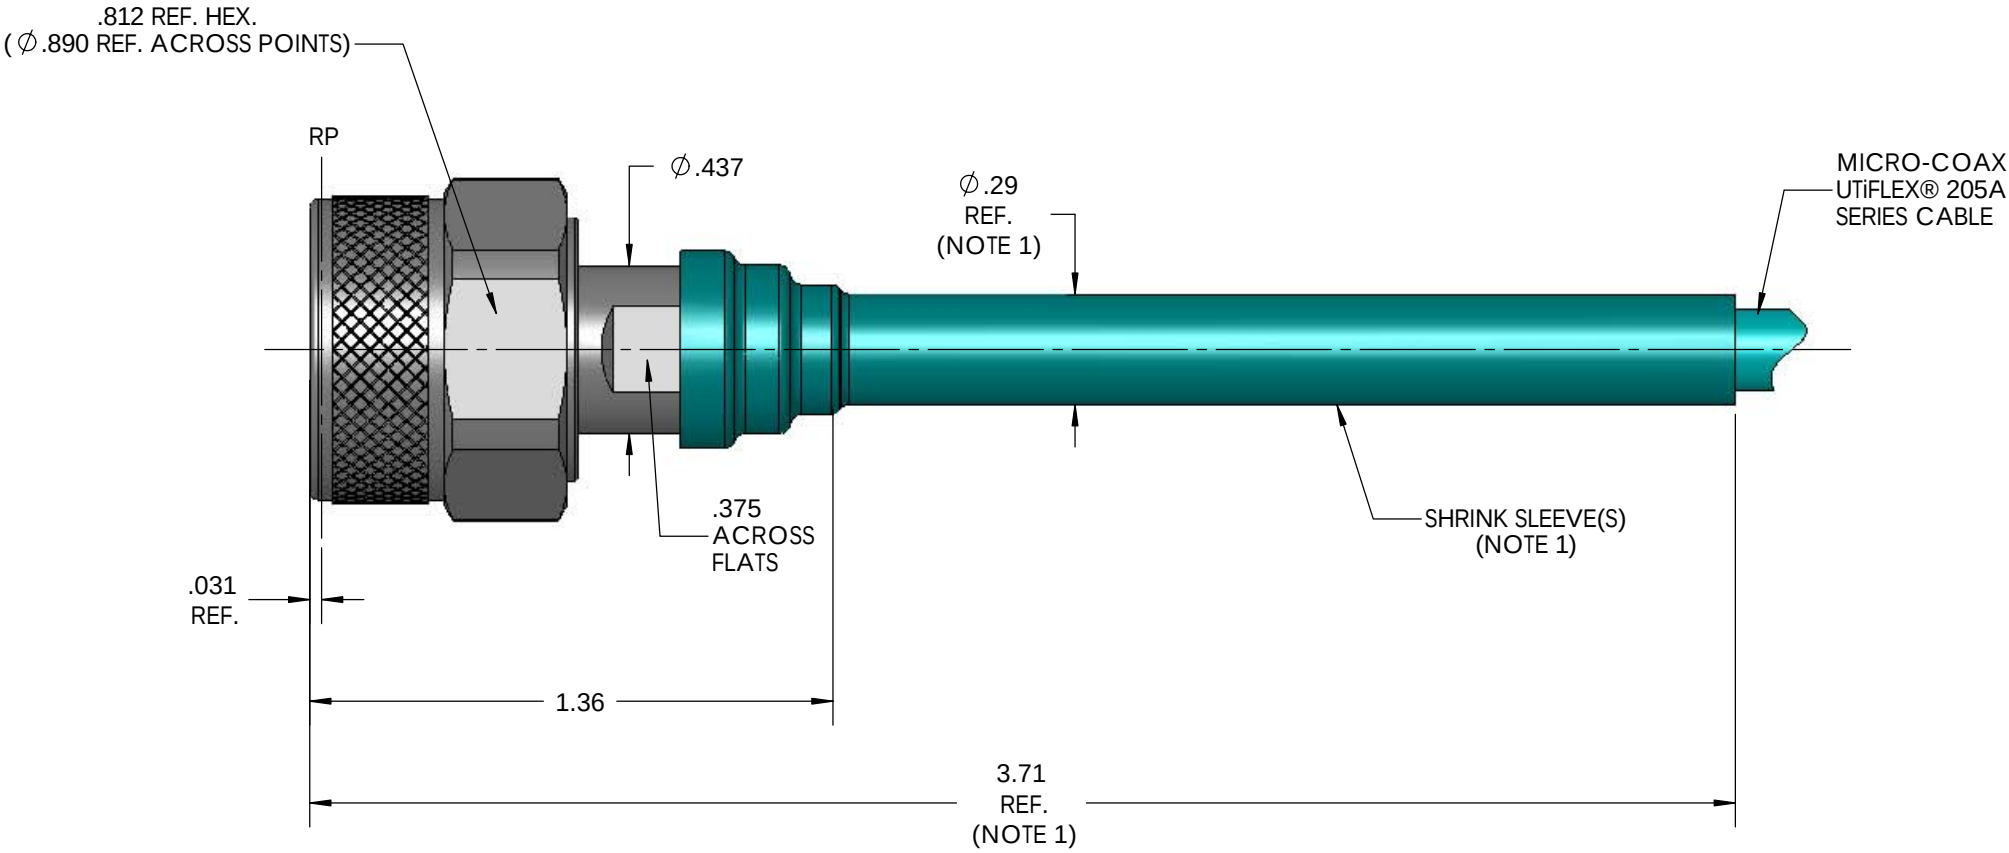

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		MICRO-COAX[®] <i>Leading the way in transmission line solutions.</i> <i>Copyright Micro-Coax, Inc.</i>					
		DWN.	SRS	04/11/05							
		CHKD.									
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		N PLUG, PRECISION, UFB205A, VENTED									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO. 64639	SIZE B	SCALE 2:1	SHEET NO. 1 OF 1	DRAWING NO. SD904316	REV A		
.XXX	± .005										
.XXXX	± .0010										
ANGLES	± 2°										