
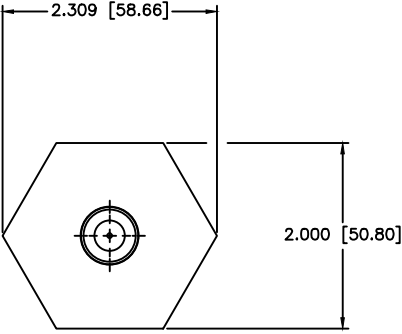


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

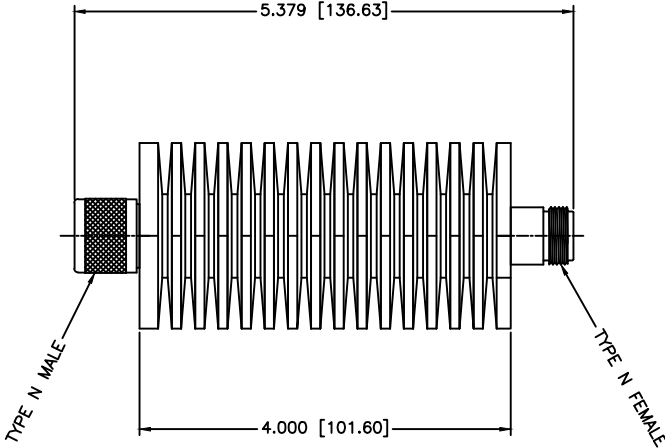

SPECIFICATIONS

Frequency Range: DC–3 GHz
VSWR: 1.30:1 Max.
Attenuation Value: 40 ± 1.30 dB
Power @ 25°C: 50 Watts
Operating Temperature: –40°C to +40°C
Impedance: 50 ohms
Mechanical
N Connectors: Passivated Stainless Steel
Conductors: Gold Plated Beryllium Copper
Housing: Anodized Aluminum

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.005 ANGLES: $\pm 1/2^\circ$	MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8204 FAX: (727) 381-8118 WWW.MCLI.COM	SCALE: N/A SHEET: N/A	
DRAWING TITLE: COAXIAL ATTENUATOR	PART NO.: FAN-7-40		
DESIGNED: Paboon Luethamhan	DATE: 10-02-2000	CAGE CODE: 002L5	SHEET: C
APPROVED: T. Nguyen	DATE: 10-02-2000	REVISION: N/A	DWG NO.: 81566