

50Ω 600 to 1600 MHz

Permanent damage may occur if any of these limits are exceeded.

CASE GROUND	2,3,4,5,6,7
-------------	-------------

LETTER "W"
OVER PIN 2




TOP VIEW

BOTTOM VIEW

SIDE VIEW

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K		wt
.200	.20	.14	.031		grams
5.08	5.08	3.56	0.79		5.2

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ		
1.00	101.25	6.07	600.00	3.42
50.00	91.37	5.83	625.00	2.65
100.00	89.81	3.74	650.00	2.20
250.00	66.76	1.19	700.00	1.71
325.00	47.71	0.69	750.00	1.48
420.00	28.37	0.63	800.00	1.28
490.00	14.86	0.68	850.00	1.14
530.00	7.18	0.63	900.00	0.98
560.00	2.70	0.38	950.00	0.91
575.00	1.42	0.21	1000.00	0.83
600.00	0.58	0.04	1100.00	0.74
800.00	0.32	0.01	1200.00	0.66
1000.00	0.39	0.02	1300.00	0.60
1200.00	0.31	0.01	1350.00	0.58
1300.00	0.29	0.01	1400.00	0.55
1400.00	0.32	0.02	1450.00	0.54
1500.00	0.41	0.02	1500.00	0.49
1600.00	0.43	0.02	1600.00	0.49

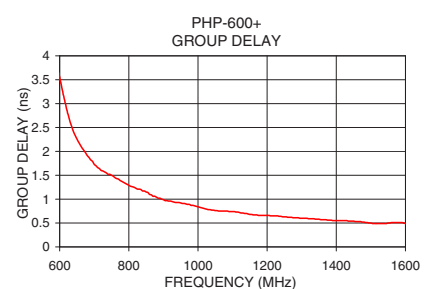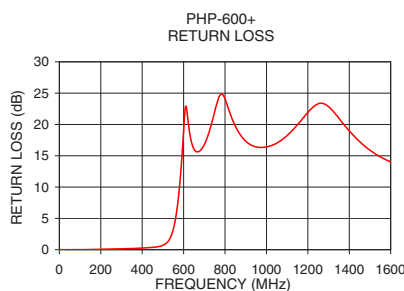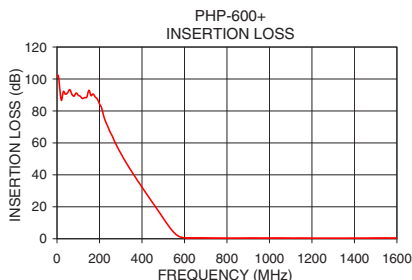

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications