


- RF SAW Filter, 921.5 MHz, 13 MHz Bandwidth
- 2.0 x 1.6 x 0.9 mm Surface-mount Case
- Input/Output Impedance 50Ω/50Ω
- Complies with Directive 2002/95/EC (RoHS)
- Complies with AEC-Q200 Qualification Testing



SF2259H

**921.5 MHz
SAW Filter**



SM2016-4

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Maximum DC Voltage on any Non-ground Terminal	3	VDC
Operating Temperature Range	-40 to +85	°C
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Maximum Soldering Profile, 5 Cycles	265 °C for 10 s	

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_C			921.5		MHz
Maximum Insertion Loss, 915 - 928 MHz	IL_{MAX}			2.0	3.0	dB
Amplitude Ripple, p-p, 915 - 928 MHz				0.3	1.0	
Return Loss, 915 - 928 MHz			10	12		
Group Delay Ripple, 915 - 928 MHz				15	50	ns
Attenuation, Referenced to 0 dB:						dB
10 to 857.5 MHz			40	52		
857.5 to 895 MHz			22	45		
970 to 1005 MHz			35	40		
1005 to 1110 MHz			40	56		
1110 to 3000 MHz			30	39		
Terminating Source impedance	Z_S			50		Ω
Terminating Load impedance	Z_L			50		Ω
Single Ended Input / Output, Impedance match	No matching network required for operation at 50 ohms					
Case Style	SM2016-4					
Lid Symbolization	3W					




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.



Notes:


1. US and international patents may apply.
2. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Matching Circuit


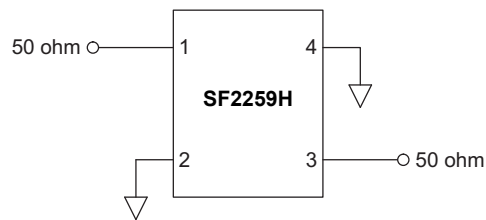


Frequency Response Plots

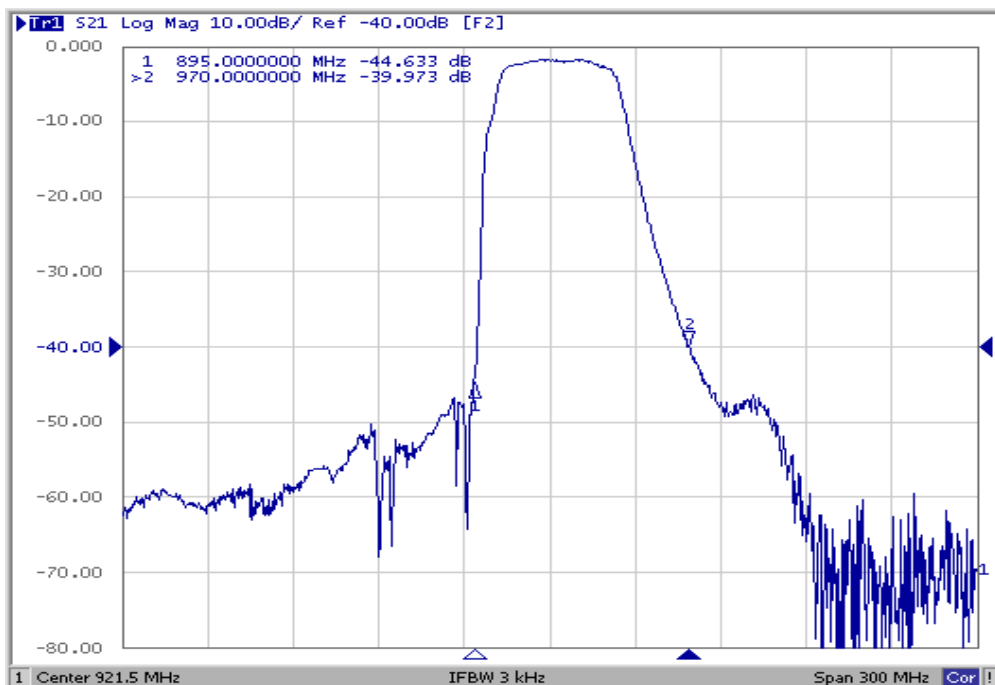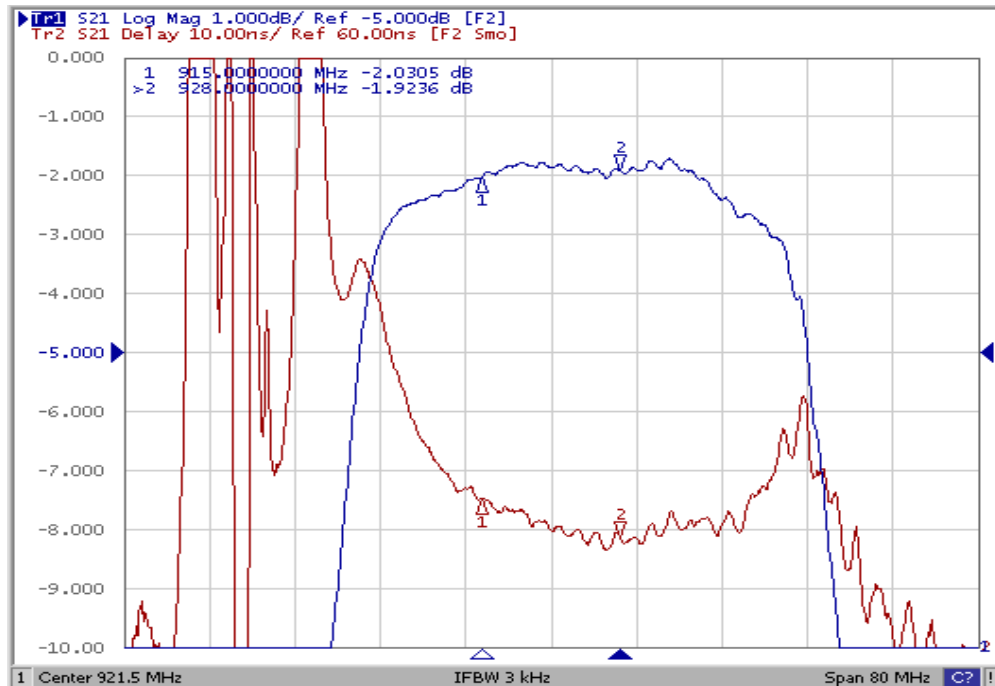

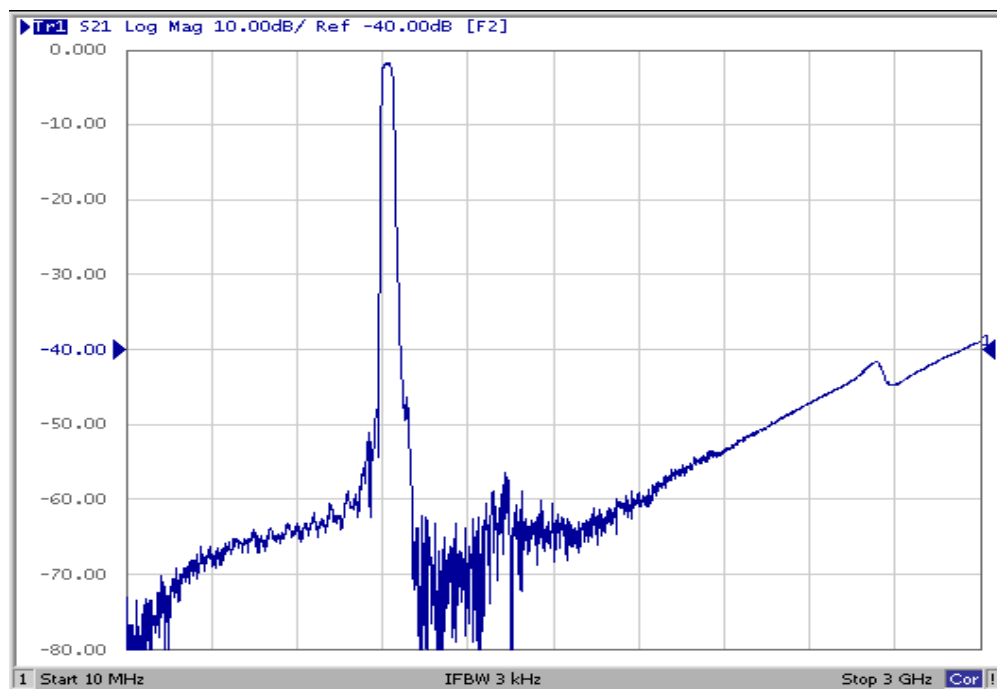



Return Loss Plots

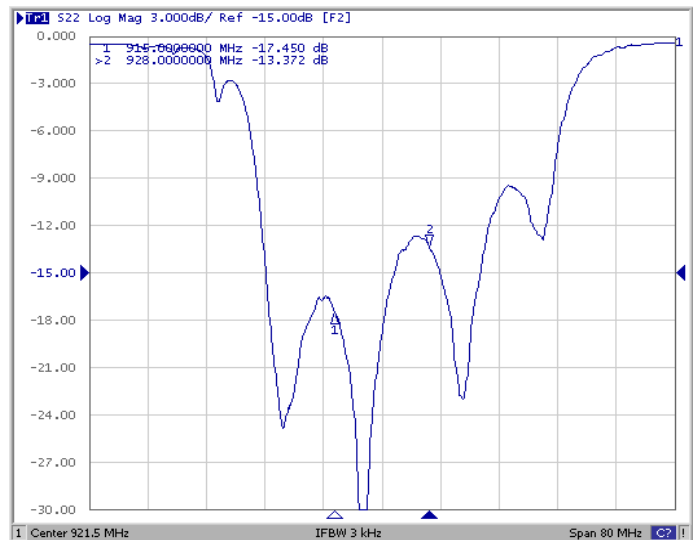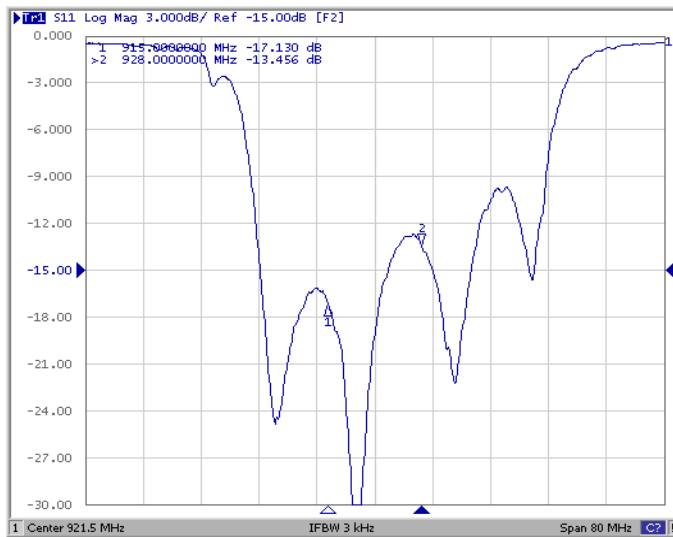

SM2016-4 Case

4-Terminal Ceramic Surface-Mount Case

2.0 X 1.6 mm Nominal Footprint

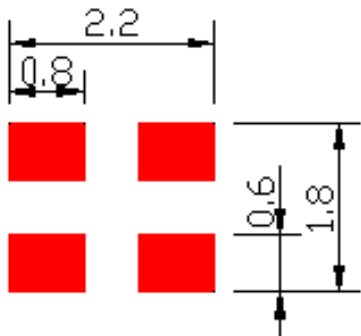


Typical PCB Footprint

Electrical Connections

Connection	Terminals
Input	1
Output	3
Ground	2, 4


Dimensions	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A		1.60			0.063	
B		2.00			0.079	
C		0.90			0.035	
D		0.10			0.004	
E		0.10			0.004	
F		0.70			0.028	
G		0.50			0.020	
H		0.10			0.004	

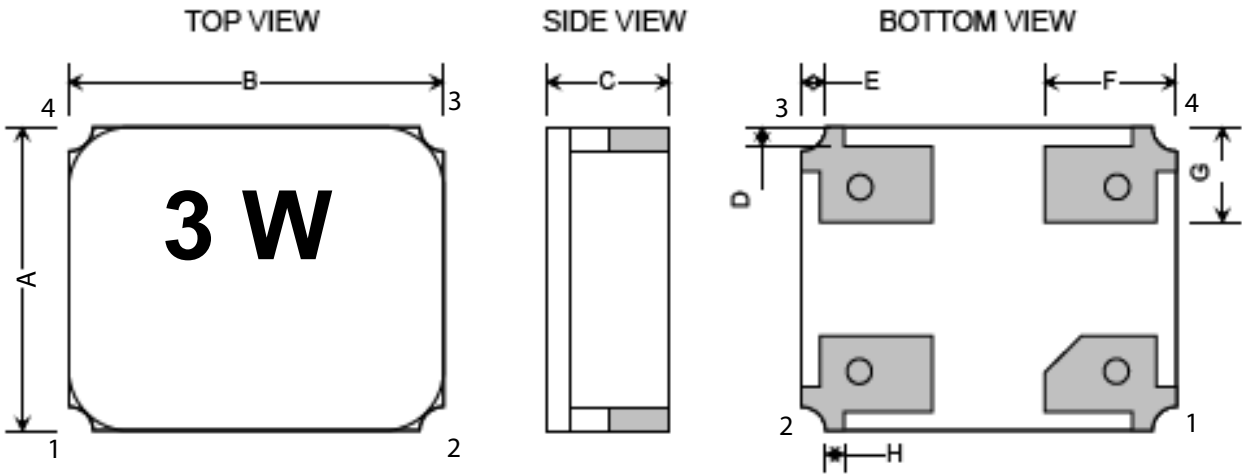

F. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=2000 typ. ; 13"=10000 typ.)

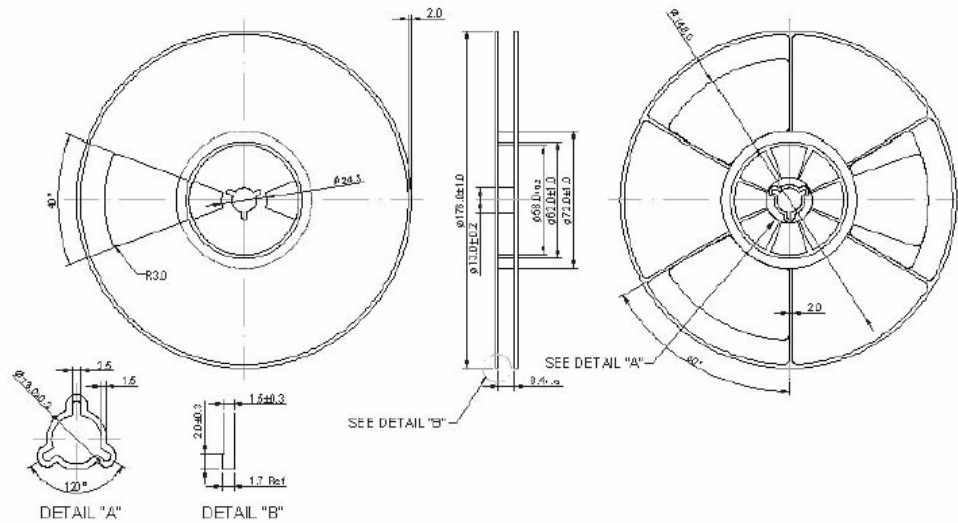

2. TAPE DIMENSION

