


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

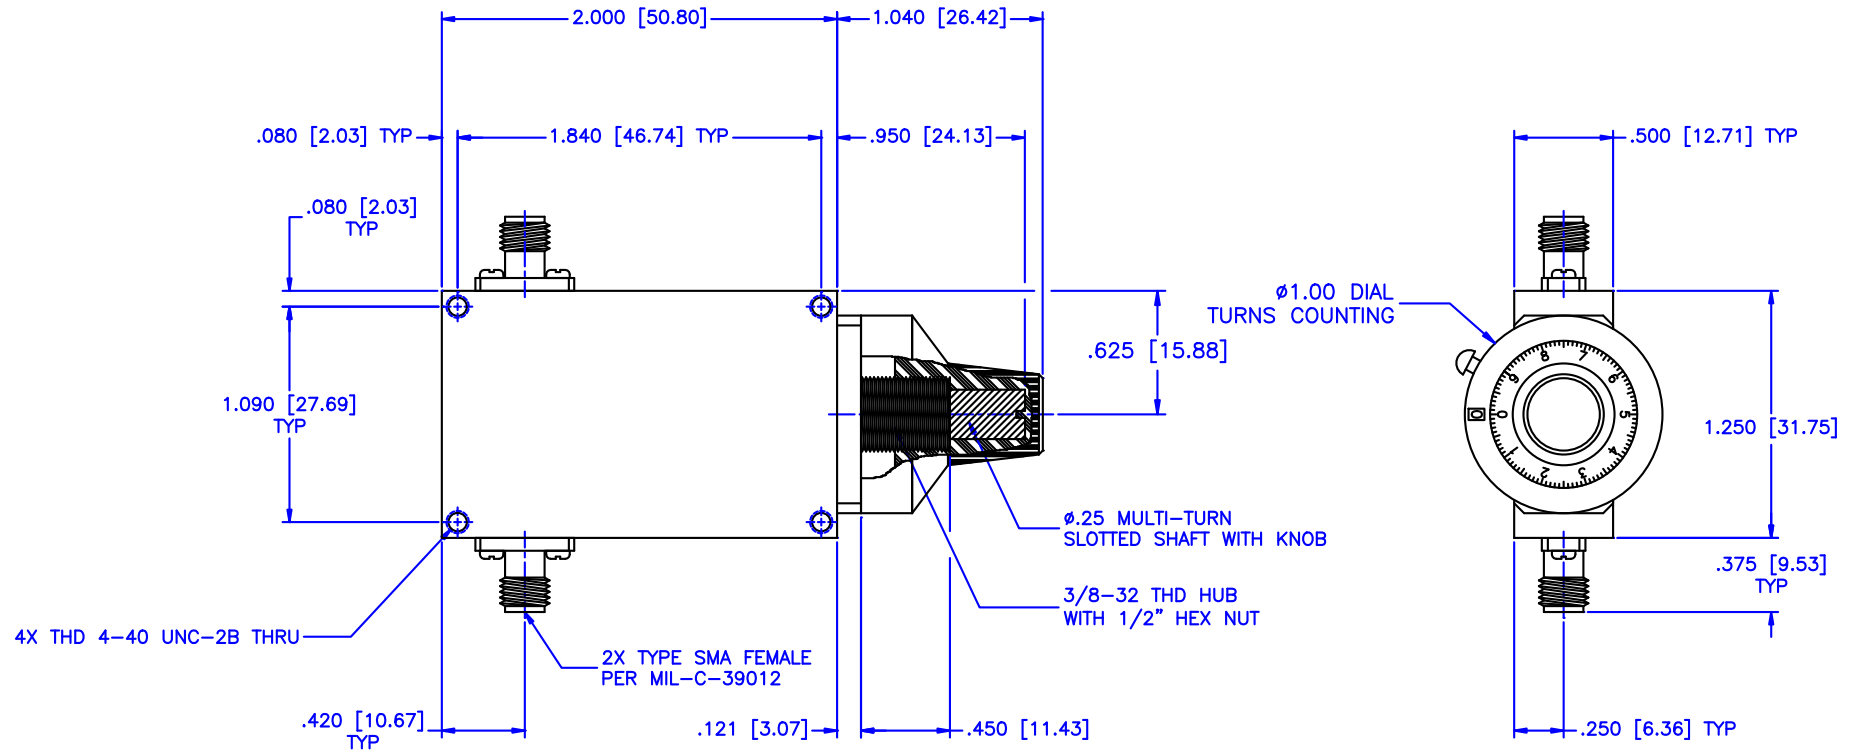

Specifications

Frequency Range: 8–18 GHz
 Attenuation: 10dB
 Insertion Loss: 1.0 Max.
 VSWR: 1.50:1
 Attenuation Vs Frequency: ± 1.5 dB
 RF Power: 5W Average, 3kW Peak

Environmental

Operating Temperature: -55°C to $+110^{\circ}\text{C}$
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 25,000ft Operating
 40,000 ft. Survival

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^{\circ}$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL		
DATE: 02-10-2011		PART NO. CA11-10/D		
APPROVED: T. Nguyen		CAGE CODE: OD2L5		SIZE: A REV: N/A DWG NO. 85477
DATE: 02-10-2011		DO NOT SCALE THE DRAWING		