


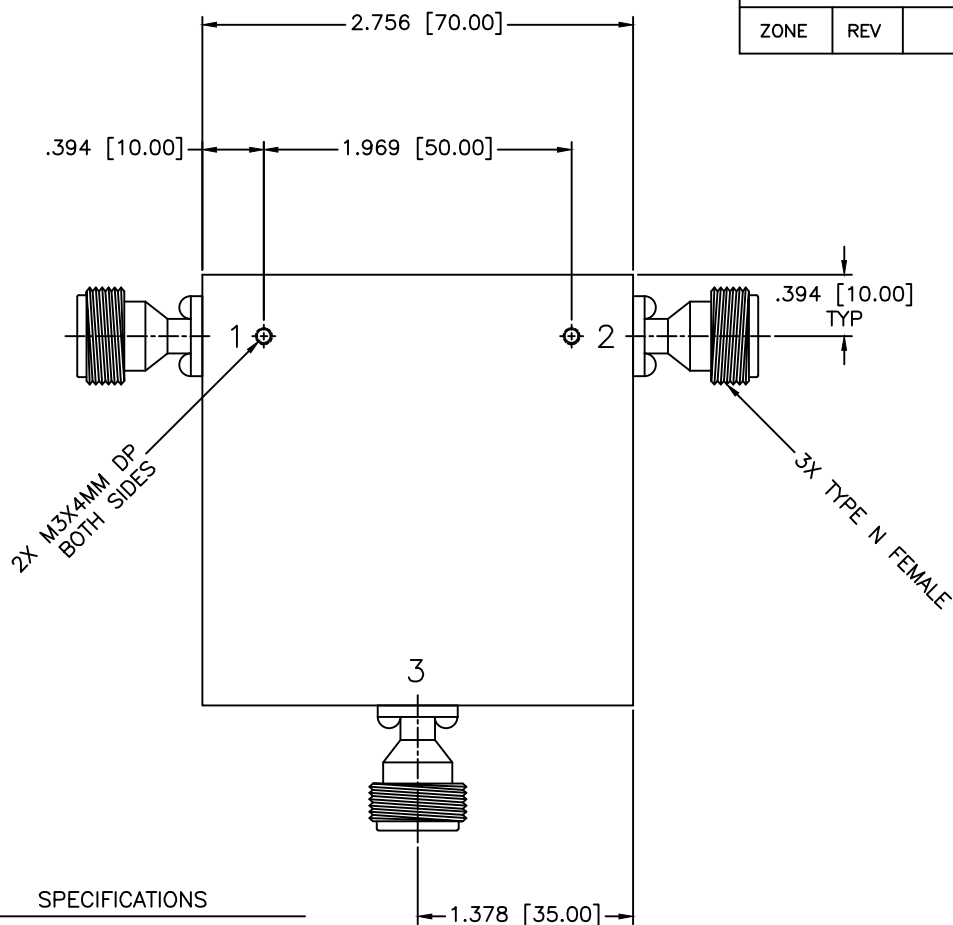

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 1.0–2.6 GHz
 Isolation: 13dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.60:1 Max.
 Operating Temperature: +10°C to +40°C
 Circulator Power:
 Average: 50 Watts
 Peak: 100 Watts

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE:

N/A

SHEET:

N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm 0.05 \pm 0.08$
 ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

COAXIAL CIRCULATOR

PART NO.

CS-4/NF

DRAWN:

Paiboon Luekhamhan

DATE:

12-13-2005


APPROVED:

T. Nguyen

DATE:

12-13-2005

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)



CAGE CODE:

OD2L5

SIZE:

N/A

REV:

N/A

DWG NO.

82456

DO NOT SCALE THE DRAWING