

Specifications


Parameter	Unit	Min	Typical	Max
Center Frequency (F0)	MHz		600	
Bandwidth (B)	MHz		348	
-3 dB Bandwidth (B3)	MHz	372	375.7	
-40 db Bandwidth (B40)	MHz		439.7	442
Delay (T0)	μsec	0.65	0.655	0.66
Insertion Loss (IL)	dB		38.9	40
Amplitude Ripple	dB p-p		0.8	1.4
Phase Ripple	deg p-p		4	6
Rejection	dB	40	41	
Spurious for $ t-T0 > .9T0$	dB		-40	-39
Substrate Material	128YX-LN			

Notes:

- Center Frequency (F0) and Bandwidth (B) are defined, not measured.
- Insertion Loss is the minimum loss for $|f-F0| < .5B$
- Ripple spec applies to the $|f-F0| < .4B$, and is doubled for $.4B < |f-F0| < .5B$
- Rejection spec applies to $(B40 \text{ Spec} - B/2) < |f-F0| < F0/2$
- Specifications are at 22C only. Unit will operate undamaged from -54C to 125C with shifts $dF0 = -x \cdot F0$, $dT0 = x \cdot T0$, where $x = 75E-6 \cdot (\text{temperature} - 22C)$


Typical Performance

Frequency Response
(Best Fit Linear Phase Removed)

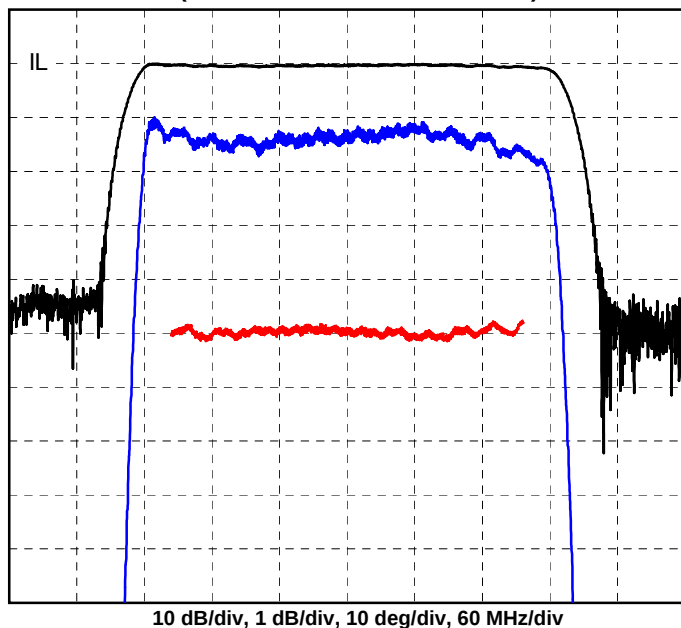


Impulse Response


FFT(Frequency Response * Cos(0.5 * PI * MIN(1, MAX(0, |f-F0| * 2.8 / (348 - 1.4))))^2

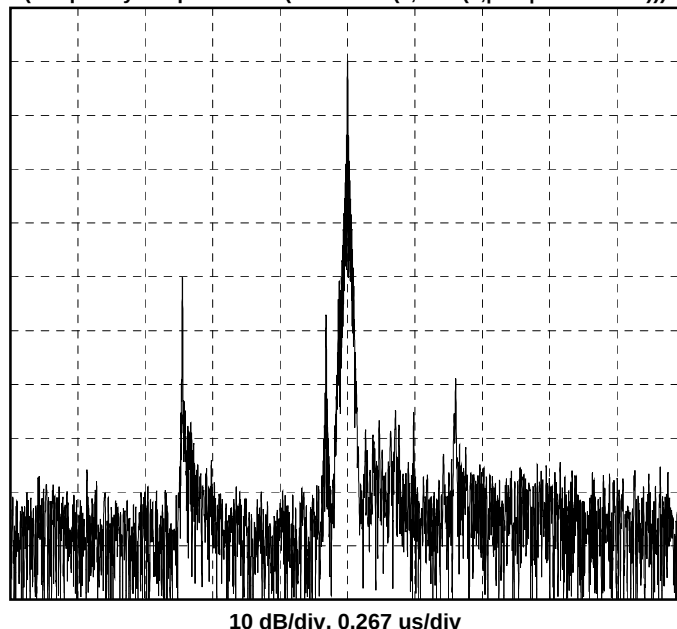

Package Outline

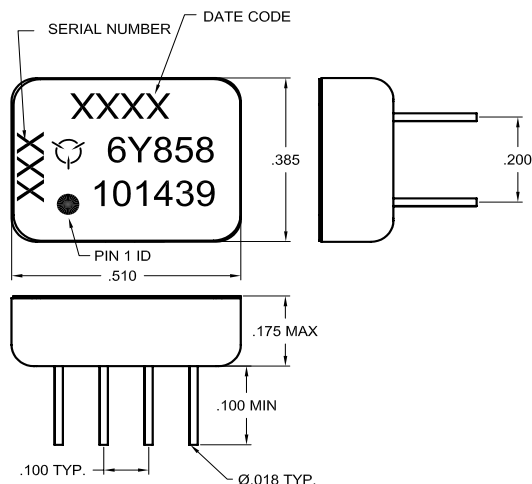

Matching

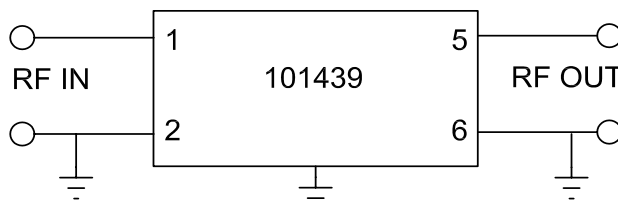

Matched S-parameters available at www.phonon.com