


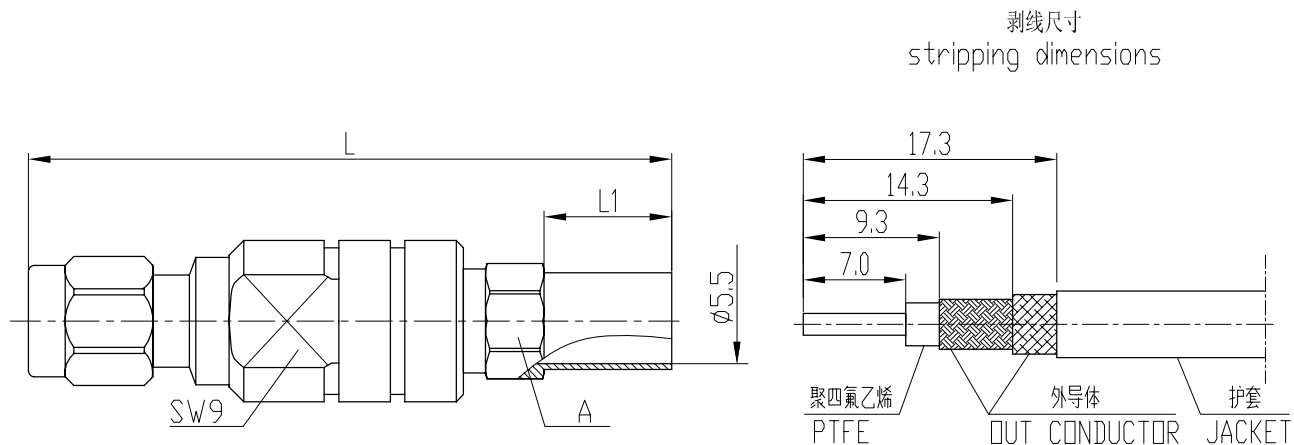

产品型号 type	电缆型号 cable type	L	A	备注 remark
SMA-J615	LL235	9	SW8	
SMA-J615G		7.5	SW9	stainless steel(不锈钢)

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: $\leq 4.0\ m\Omega$
Out conductor: $\leq 2.5\ m\Omega$
- Insulation resistance: $\geq 1000M\ \Omega$
- Insulator withstanding: 750V
- VSWR: ≤ 1.35
- Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body: brass, gold plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: $\leq 4.0\ m\Omega$
外导体: $\leq 2.5\ m\Omega$
- 绝缘电阻: $\geq 1000M\ \Omega$
- 介质耐压: 750V
- 电压驻波比: ≤ 1.35
- 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 	SCALE		SMA-J615 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X $\pm$.15 $\pm 1^\circ$.XX $\pm$.05 .XXX $\pm$
	2:1			
DRAWN	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED				
APPROVED				