



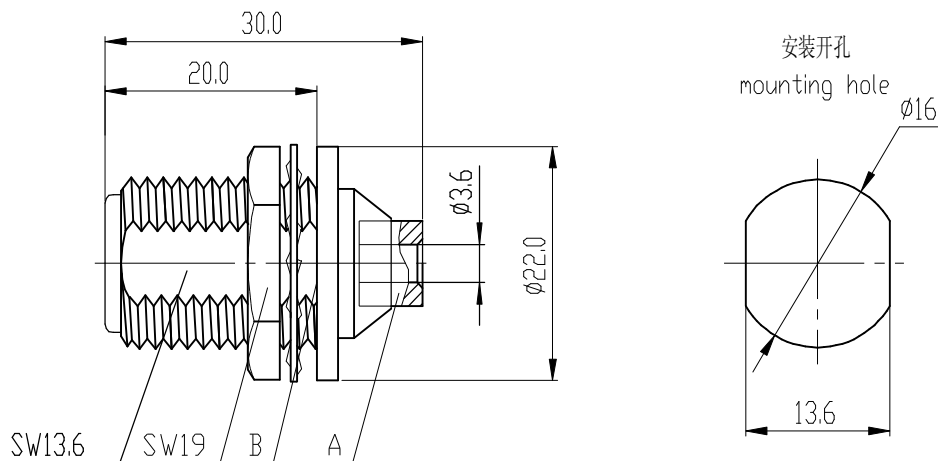

剥线尺寸
stripping dimension



产品型号 type	零件 A part A	B 处 place B	电缆型号 cable type
N-KYB3	黄铜, 镀金 brass, gold plated		SFT-50-3-1、RG402/U
N-KYB3C	黄铜, 镀金 brass, gold plated	带O型密封圈 with O ring	

Electrical Characteristics:

- Characteristic Impedance: 50Ω
- Frequency range: DC~11Ghz
- Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.5
- Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact:
Female: phosphor bronze, gold plated
- Bodies: brass, nickel plated
part A: see the table above
- Insulators: PTFE


主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC~11Ghz
- 接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀镍
零件A: 见上面的表格
- 绝缘子: 聚四氟乙烯

3. Insulators: PTFE				3. 绝缘子: 聚四氟乙烯					
	SCALE		N-KYB3 N-KYB3C RF COAXIAL CONNECTOR			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±			
	1.5:1								
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.						
DRAWN									
CHECKED									
APPROVED									