


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

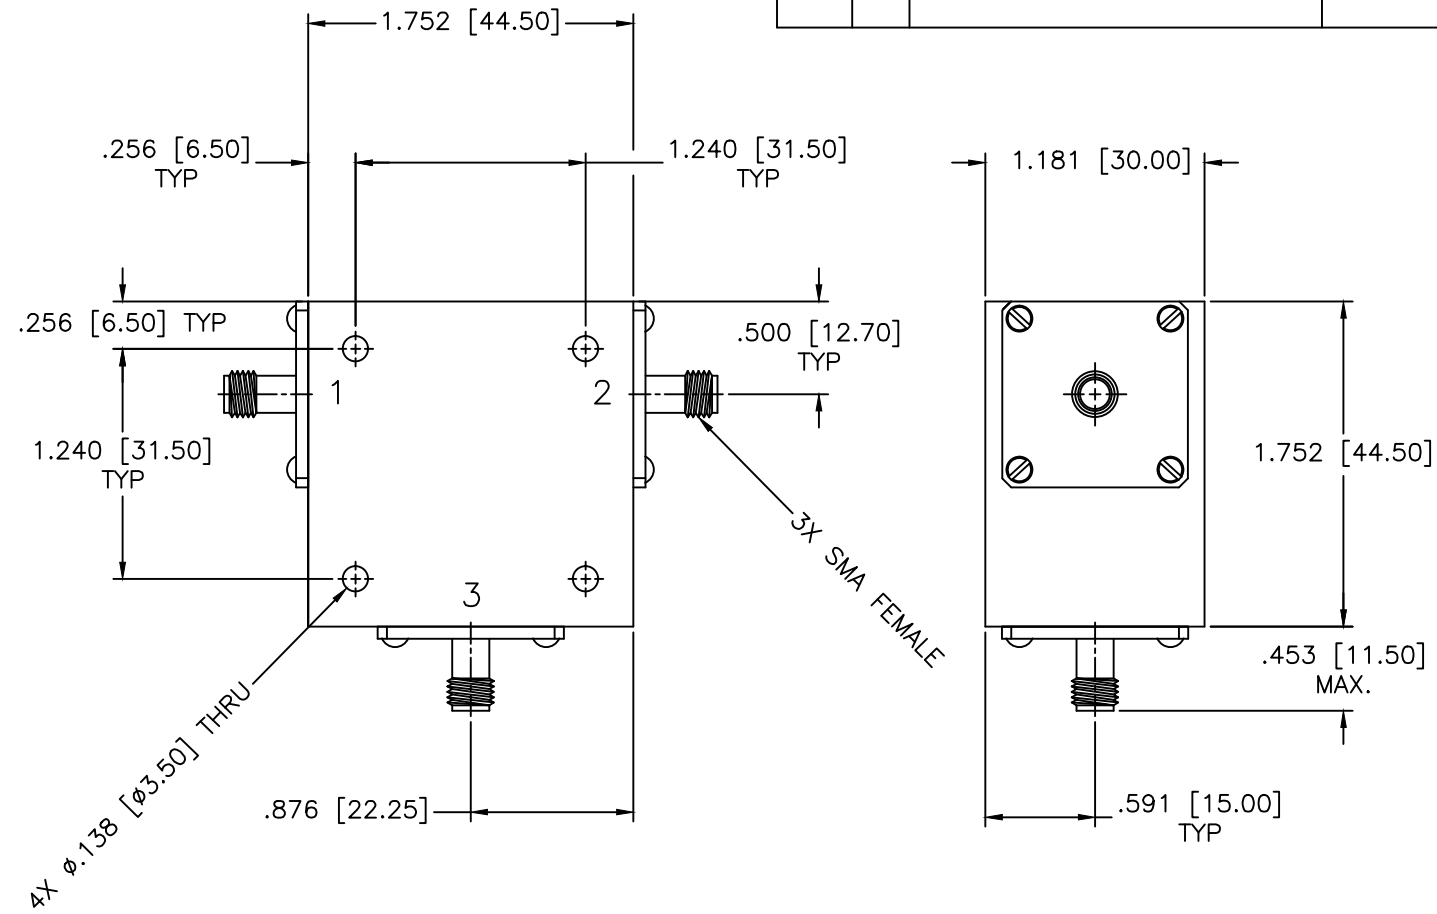

SPECIFICATIONS

Frequency Center: 1300 MHz
 Isolation: 22dB Min.
 Insertion loss: 0.30dB Max.
 VSWR: 1.20:1 Max.
 Power Average: 500 Watts
 Operating Temperature: -40°C to +85°C

MATERIAL: DRAWN: Paiboon Luekhamhan DATE: 01-20-2012 APPROVED: T. Nguyen DATE: 01-20-2012		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
		DRAWING TITLE: CIRCULATOR		
		PART NO. CS-180		
		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 85981