

D

C

B

A

D

C

B

A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

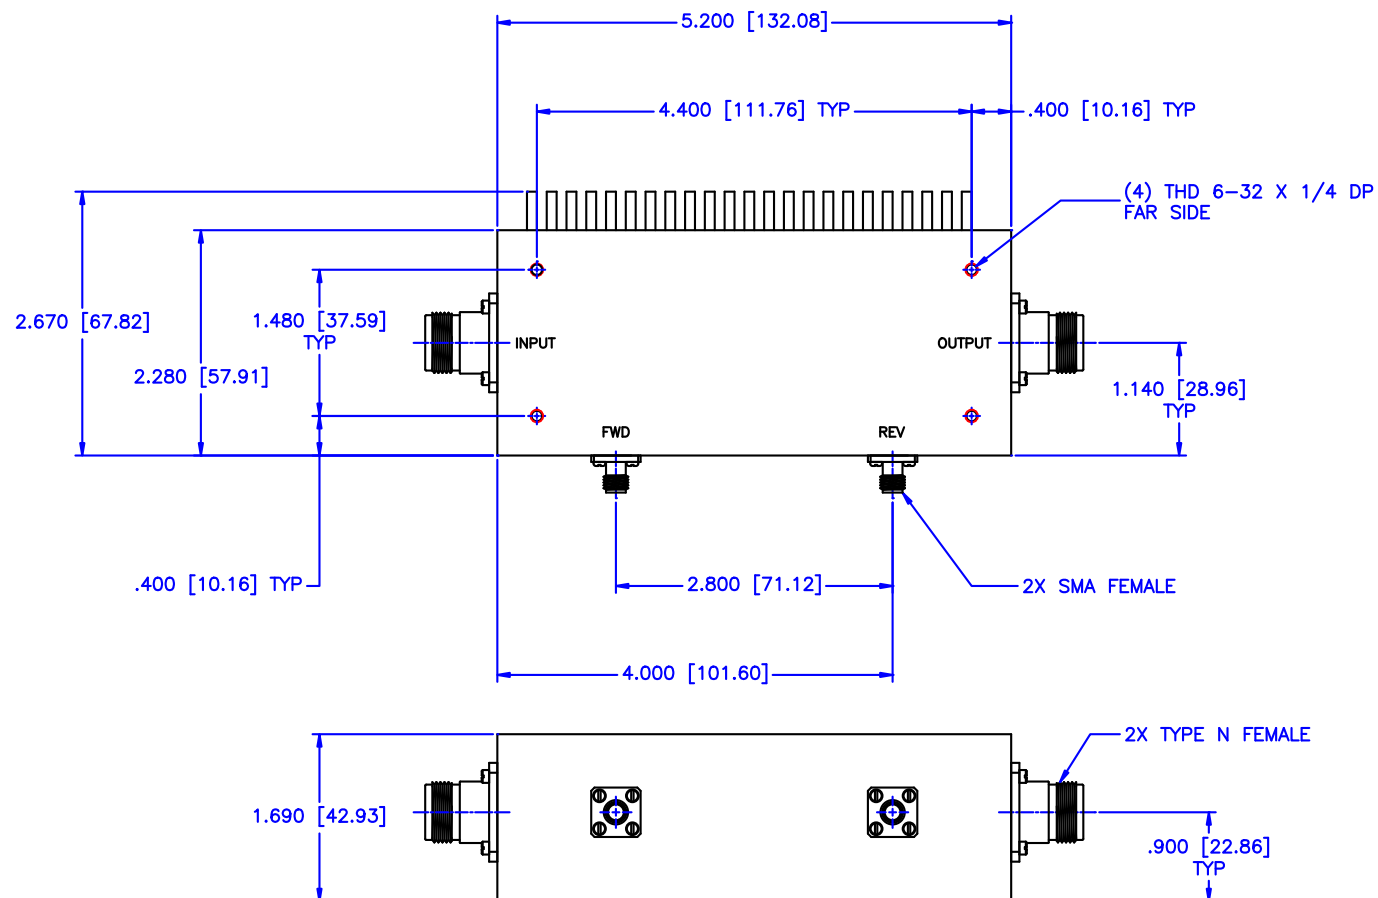

SPECIFICATIONS

FREQUENCY RANGE: 20 to 500 MHz

COUPLING: 30dB $\pm$ 1.0dB Nom.

FLATNESS: $\pm$ 0.50dB MAX.

INSERTION LOSS: 0.90dB Max.

DIRECTIVITY: 20dB Min.

VSWR: 1.20:1 Max.

POWER: 50 Watts CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm$ 1/64 DECIMALS: $\pm$.01 $\pm$.005 ANGLE: $\pm$ 1/2°		SHEET: N/A	
DRAWN: Piaboon Luekhamhan		DATE: 12-09-2011		DRAWING TITLE: 30dB DUAL DIRECTIONAL COUPLER	
APPROVED: T. Nguyen		DATE: 12-09-2011		PART NO. HDL-26-30-50	
		CAGE CODE: OD2L5		SIZE: C	REV: N/A
				DWG NO. 85955	
				DO NOT SCALE THE DRAWING	

4

3

2

1