


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

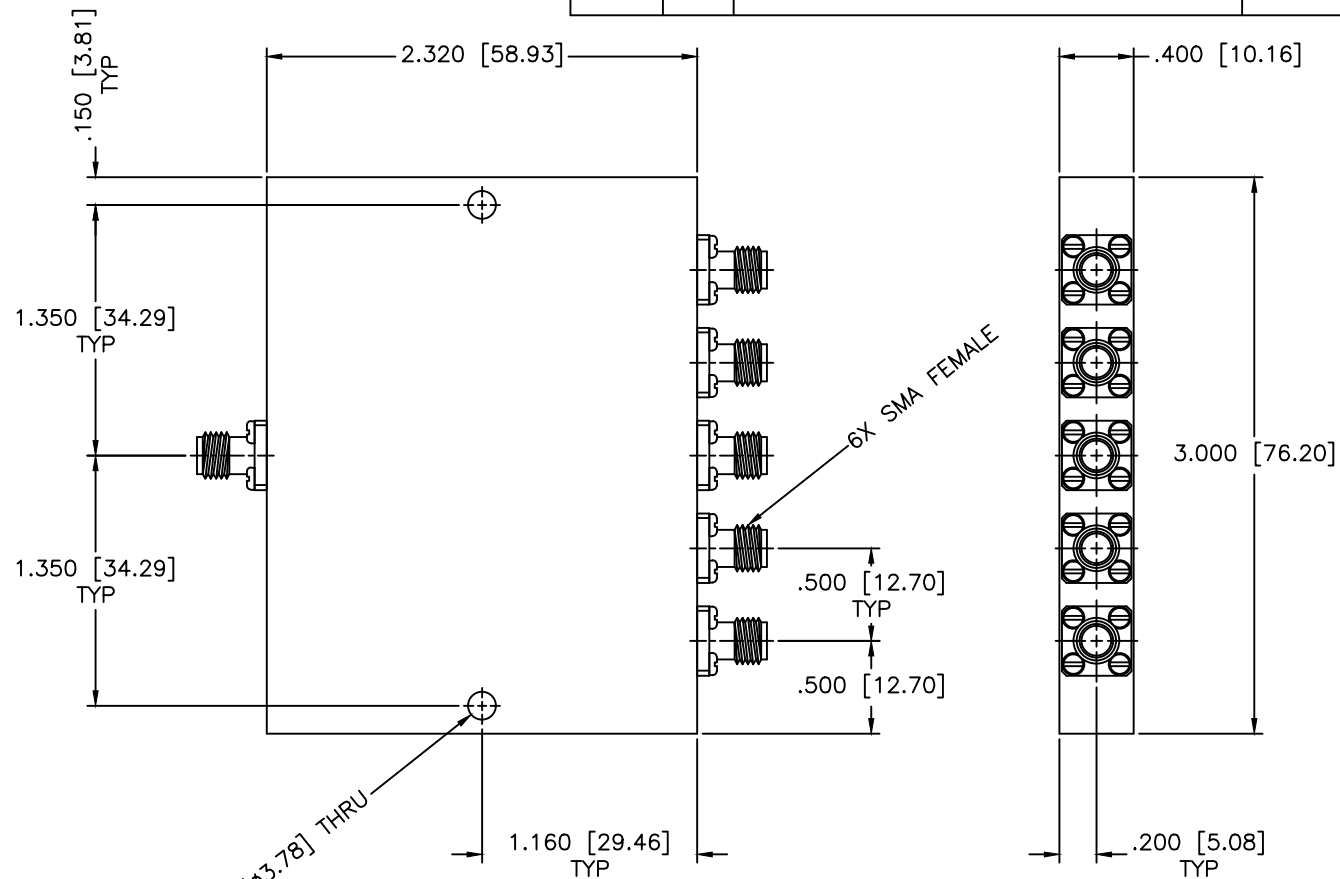

SPECIFICATIONS

Frequency Range: 7.5–16 GHz
 Insertion Loss: 3.4dB Max.
 Isolation: 11dB Min.
 VSWR: 1.90:1 Max.
 Amplitude Balance: ± 1.5 dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 08-17-1998		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 5-WAY POWER DIVIDER	
				PART NO. PS5-29	
APPROVED: T. Nguyen DATE: 08-17-1998		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A
				REV: N/A	DWG NO. 81097
				DO NOT SCALE THE DRAWING	