


TCXO/VCTCXO ULTRA MINIATURE SMD (3.2 x 2.5 x 1.0mm)
FEATURES:

- ANALOG IC / VC OPTION
- LOW VOLTAGE / TIGHT STABILITY
- LOW COST FOR A TIGHT STABILITY TCXO

APPLICATIONS:


- GPS/GPS MODULE
- Cellular Phone (CDMA & WCDMA)
- Broadband Access


■ SPECIFICATION

PARAMETER		MIN.	TYP.	MAX.	UNIT	NOTE
FREQUENCY RANGE		16		26	MHz	
FREQUENCY TOLERANCE				±1.0	ppm	@ V _c = 1/2V _{DD} DC @ 25°C ± 2°C
FREQUENCY STABILITY	vs. TEMPERATURE RANGE			±0.5	ppm	See P/N guide for other options
	vs. LOAD ± 5%			±0.2	ppm	
	vs. SUPPLY VOLTAGE ± 5%			±0.2	ppm	
	vs. AGING			±1.0	ppm/year	
OPERATING TEMPERATURE RANGE		-30		85	°C	See P/N guide for other options
STORAGE TEMPERATURE RANGE		-40		85	°C	
SUPPLY VOLTAGE ±5%		2.5		3.3	V	
SUPPLY CURRENT				2.0	mA	
OUTPUT	LOGIC FAMILY	Clipped Sinewave				
	LOAD	10kΩ//10pF				
	LEVEL	0.8			V _{P-P}	
FREQUENCY DEVIATION		±3.0		±15.0	ppm	See P/N guide for other options
CONTROL VOLTAGE		0.4		2.4	V	1.5V ±1.0V available
V _c INPUT IMPEDANCE		100			kΩ	
PHASE NOISE	1kHz			-130	dBc/Hz	

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.


■ PACKAGE DIMENSIONS

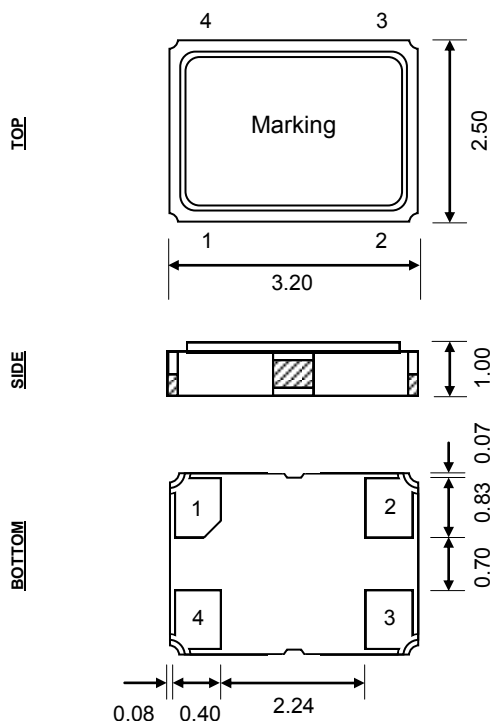


Unit : mm

Pin Configuration	
1	N/C or V _c
2	GND
3	Output
4	V _{DD}


■ SOLDER PATTERN

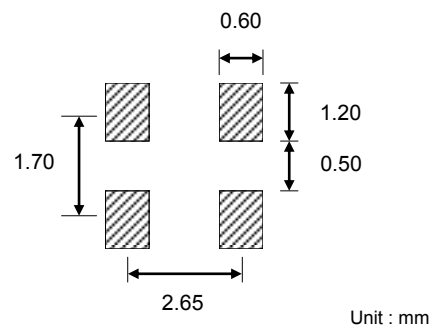

■ REFLOW PROFILE

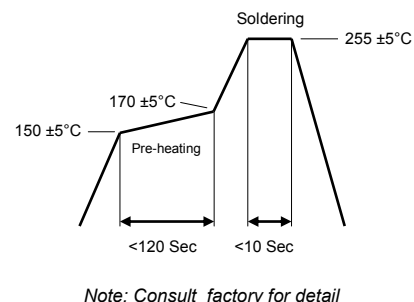

■ PART NUMBERING GUIDE

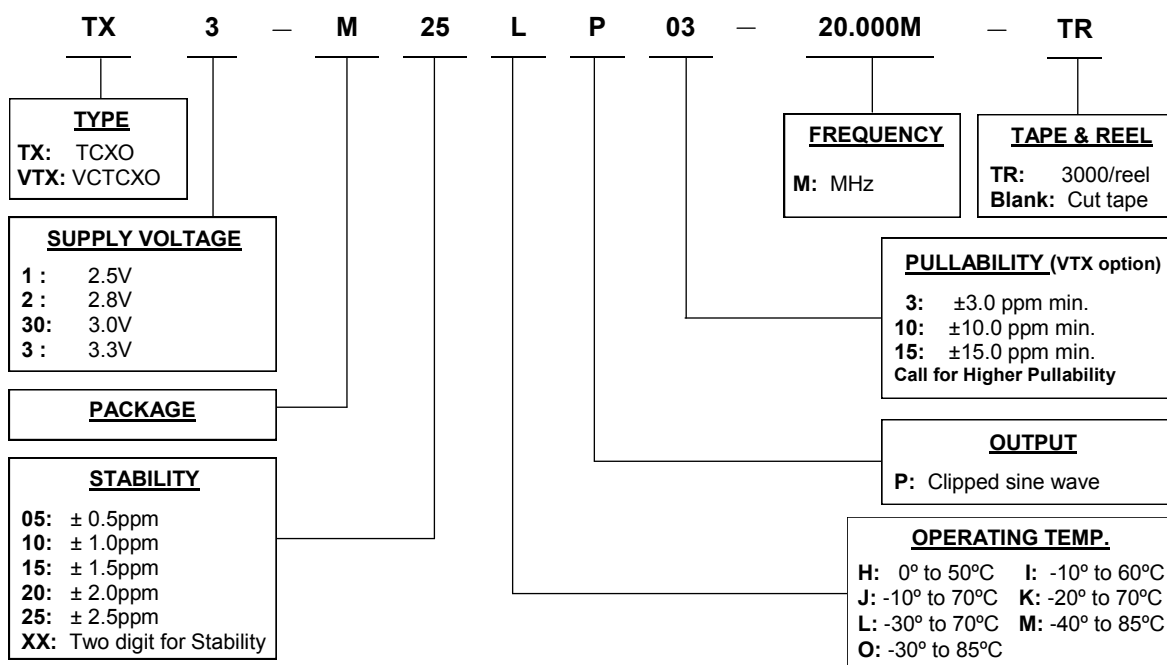

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.