


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

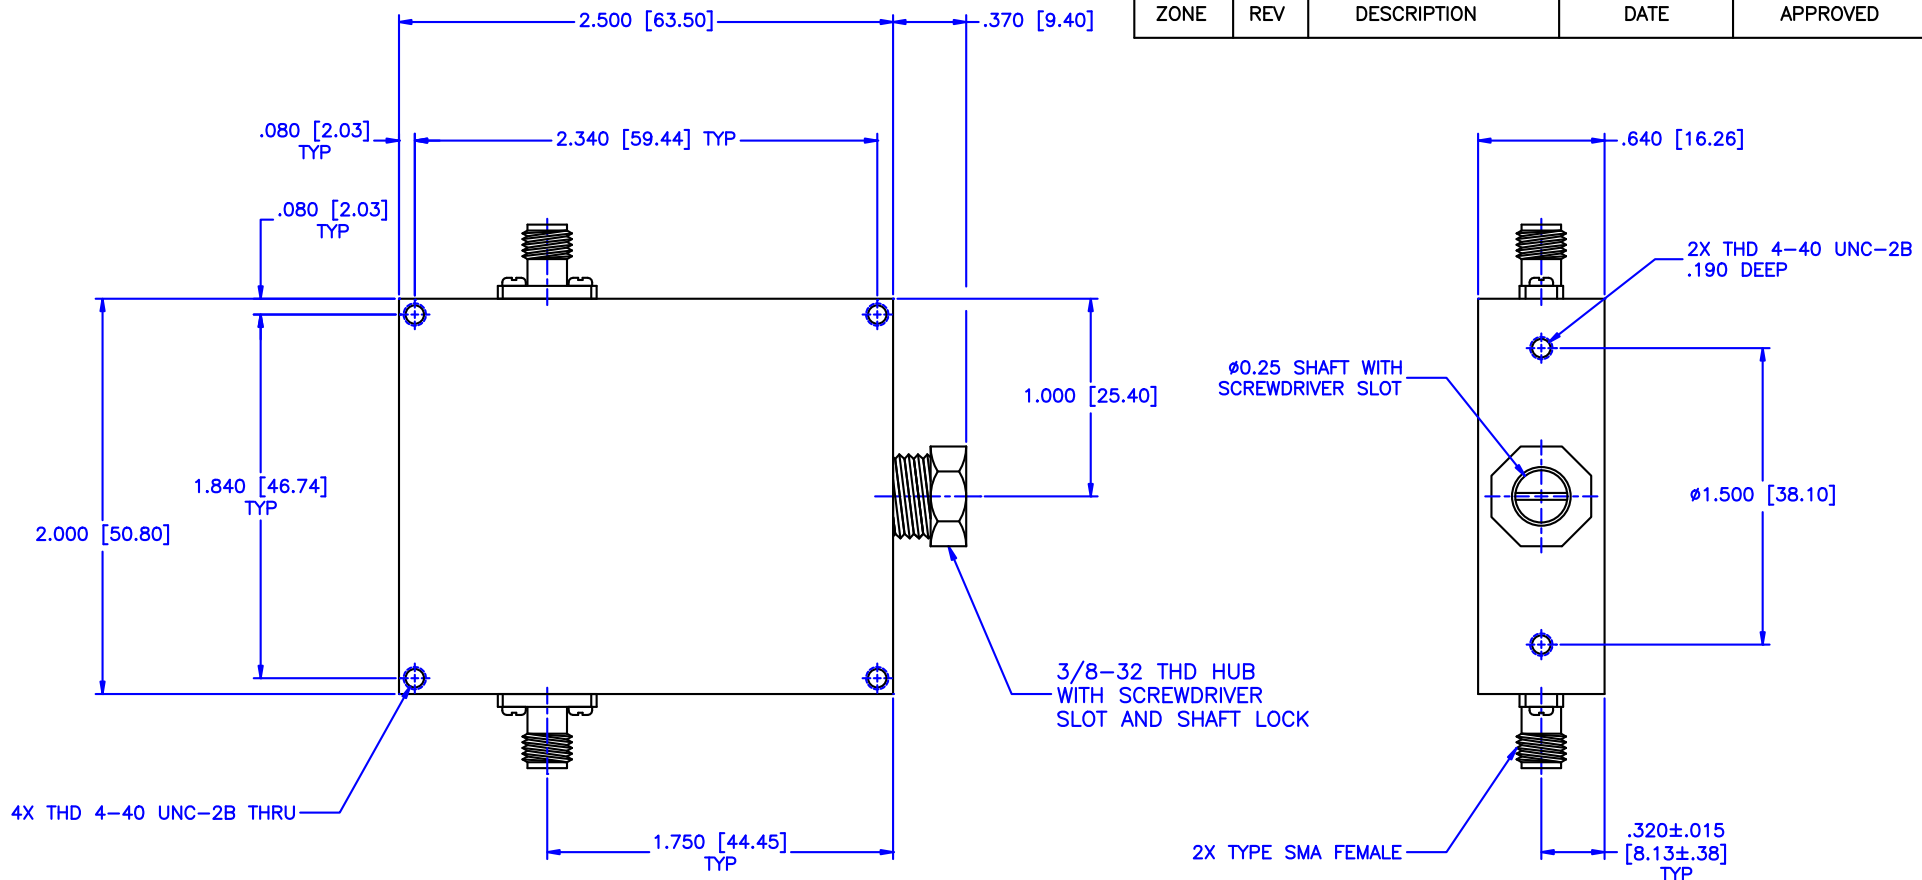

Specifications:

Frequency Range: 6-18 GHz
Attenuation: 60dB
Insertion Loss: 0.9 Max.
VSWR: 1.50:1
Power Avg/Peak: 7W Average, 3kW Peak

Environmental:

Temperature range: -55°C to +110°C
Shock: 15 G's, 11mS, 1/2 sine
Vibration: 3 G's overall
Altitude: 40,000 ft. Survival 25,000ft Operating

- * Aluminum body
- * Stainless steel connector
- * Corrosion Resistant 316 stainless steel epoxy coating

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SHEET: N/A	
			SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		DRAWING TITLE: ATTENUATOR		
PART NO. CVA23-60				
DRAWN: Paiboon Luekhamhan	DATE: 04-23-2007	CAGE CODE: 0D2L5		
APPROVED: T. Nguyen	DATE: 04-23-2007	SIZE: A	REV: N/A	DWG NO. 83848
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		