


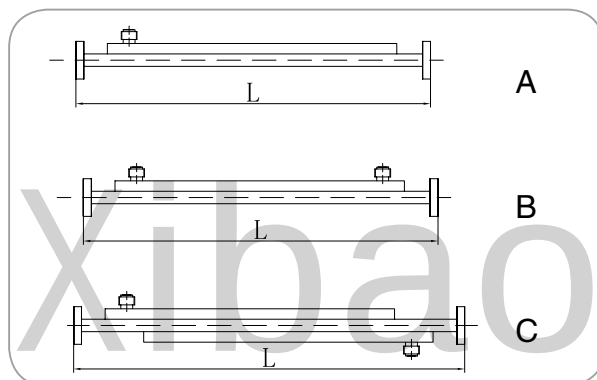

* 型号描述 How to Order

XB-WCDC-□□□-□□□-□□□

同轴接头形式 Connector

耦合量 Coupling(dB)

国际电工波导标准型号 EIA Model No.

波导同轴一体定向耦合器

Waveguide Coaxial Directional Coupler

“西宝”缩写 The Abbreviation for Xibao

* 型号及指标 Model & Specifications

型号 Model	频率范围 Freq (GHz)	法兰 Flange	耦合量 Coupling (dB)	方向性 Directivity (dB)	驻波 VSWR Main	驻波 VSWR Second	接头 Connector	长度 Length (mm)
XB-WCDC229-□□-□□	3.22~4.90	FDP/FDM	3~40	20~35	≤1.08	≤1.30	N-Female	1050
XB-WCDC187-□□-□□	3.94~5.99	FDP/FDM	3~40	20~35	≤1.08	≤1.30	N-Female	900
XB-WCDC159-□□-□□	4.64~7.05	FDP/FDM	3~40	20~35	≤1.08	≤1.30	N-Female	780
XB-WCDC137-□□-□□	5.38~8.17	FDP/FDM	3~40	20~35	≤1.08	≤1.30	N-Female	640
XB-WCDC112-□□-□□	6.57~9.99	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.30	N-Female	520
XB-WCDC90-□□-□□	8.20~12.40	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.30	N/SMA-Female	425
XB-WCDC75-□□-□□	9.84~15.0	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.30	N/SMA-Female	370
XB-WCDC62-□□-□□	11.9~18.0	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.30	SMA-Female	320
XB-WCDC51-□□-□□	14.5~22.0	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.35	SMA-Female	280
XB-WCDC42-□□-□□	18.0~26.5	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.4	SMA-Female	250
XB-WCDC34-□□-□□	21.7~33.0	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.5	K2.9-Female	225
XB-WCDC28-□□-□□	26.5~40.0	FBP/FBM/FBE	3~40	20~35	≤1.08	≤1.5	K2.9-Female	200
XB-WCDC22-□□-□□	33.0~50.0	UG383/U	3~40	20~35	≤1.08	≤1.5	OS2.4-female	170

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)

※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)