



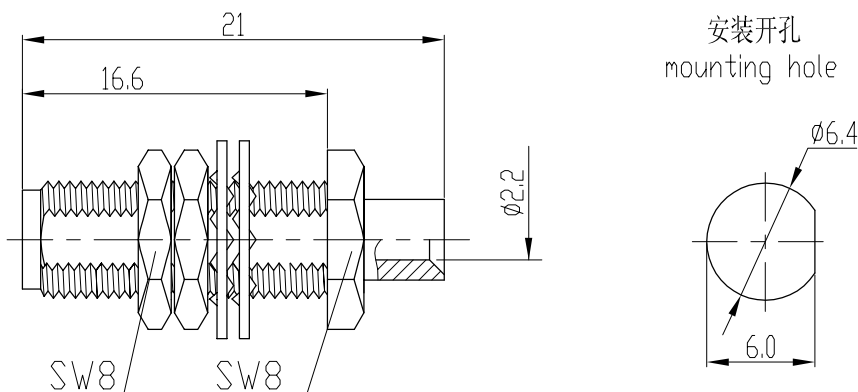

剥线尺寸
stripping dimensions

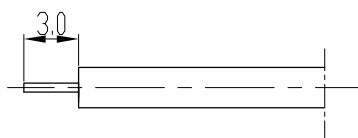

产品型号 type	电缆型号 cable type
SMA-KYB2B	SFT-50-2-1-RG405/U

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~18Ghz
3. Contact resistance
Center conductor: $\leq 3.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
4. Insulation resistance: $\geq 5000M\ \Omega$
5. Insulator withstanding: 1000V
6. VSWR: ≤ 1.35
7. Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

1. Center contact :
Female: beryllium, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~18Ghz
3. 接触电阻:
中心导体: $\leq 3.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
4. 绝缘电阻: $\geq 5000M\ \Omega$
5. 介质耐压: 1000V
6. 电压驻波比: ≤ 1.35
7. 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

				SCALE 2.5:1		SMA-KYB2B RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED		
		NAME		DATE			DIMENSIONS ARE mm, TOLERANCES ARE		
DRAWN							FRACTIONS DECIMALS ANGLES		
CHECKED							.X± .15 ±1°		
APPROVED							.XX± .05		
							.XXX±		
							西安富士达科技股份有限公司		
							XI'AN FORSTAR S&T CO.,LTD.		