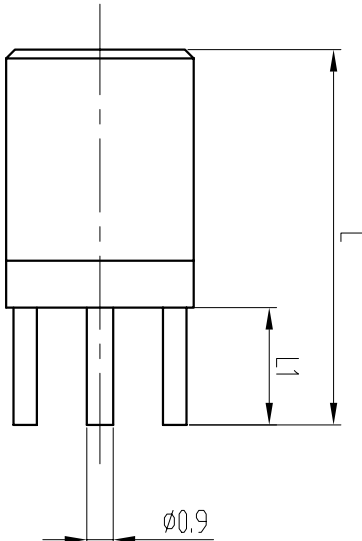
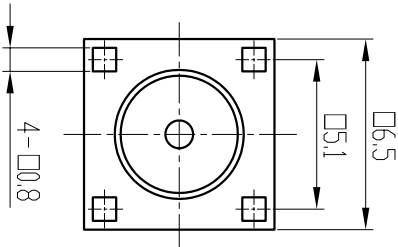


Electrical Characteristics:

- 1. Characteristic Impedance: 50 Ω
- 2. Frequency range: DC~3Ghz
- 3. Contact resistance
- Center conductor: ≤6.0 mΩ
- Out conductor: ≤1.0 mΩ
- 4. Insulation resistance: ≥1000MΩ
- 5. Insulator withstand: 750V
- 6. Durability: 500cycles

主要性能指标:

- 1. 特性阻抗: 50 Ω
- 2. 频率范围: DC~3Ghz
- 3. 接触电阻:
- 中心导体: ≤6.0 mΩ
- 外导体: ≤1.0 mΩ
- 4. 绝缘电阻: ≥1000MΩ
- 5. 介质耐压: 750V
- 6. 插拔次数: 500次

Application: MIL-C-39012/68A

执行标准: MIL-C-39012/68A

Material&Finishing

- 1. Center contact:
Female: beryllium copper, gold plated
- 2. Body: brass, gold plated
- 3. Insulators: PTFE

材料和镀层

- 1. 中心接触件:
插孔: 铍青铜, 镀金
- 2. 壳体: 黄铜, 镀金
- 3. 绝缘子: 聚四氟乙烯

产品型号 type	L	L1
SMB-KHD	12.8	3.9
SMB-KHD1	21.5	2.9

		SCALE	SMB-KHD	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE ^{mm} , TOLERANCES ARE FRACTIONS DECIMALS ANGLES X± .15 ±1° .XX± .05 .XXX±
		2:1		
NAME	DATE	RF COAXIAL CONNECTOR		
DRAWN				
CHECKED				
APPROVED				
西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.				