

1	2	3	4	5	6
			No.	Revision	Date
			△		
			△		

SPECIFICATIONS

Impedance : 50 ohm

Frequency Range : DC~18GHz

V.S.W.R : 1.20:1

Insulation Resistance : 5000MΩ min


Contact Resistance : < 3mΩ

Working Voltage : 335 VRMS max

Dielectric Withstanding Voltage : 1000V min

Operating Temperature range; -45°C~85°C

Duarblity; 500 Cycles

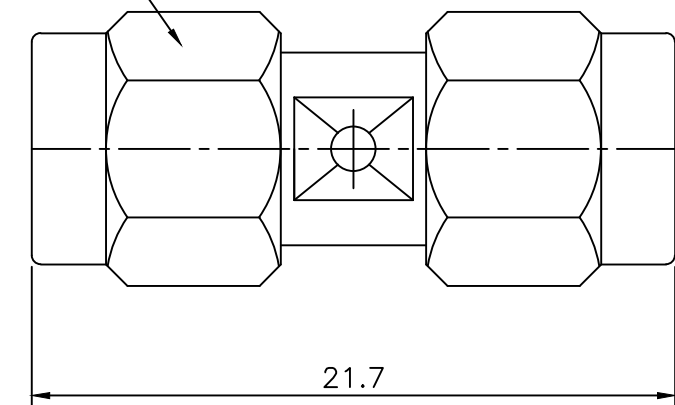

8HEX.


21.7

RoHS Compliant

Connector parts	Materials	Finish
Coupling Cap	Stainless steel	Passivated
Body	Stainless steel	Passivated
Center contact	Brass	Gold Plated
Insulator	PTFE	—

SMA PLUG to PLUG-ADAPTOR

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	1S-801S-007		NAME SMA-PP-ADAPTOR		APPROVED
MATERIAL	FINISH		TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE N/S	UNIT mm		DESIGNED S.J.LEE
		DWG NO. 1S-801S-007			DATE. 17/NOV/2010

Cross RF

web: www.crossrf.com