


REV.	DATE	DESCRIPTION
A	05/01/04	UPDATE DRAWING FORMAT

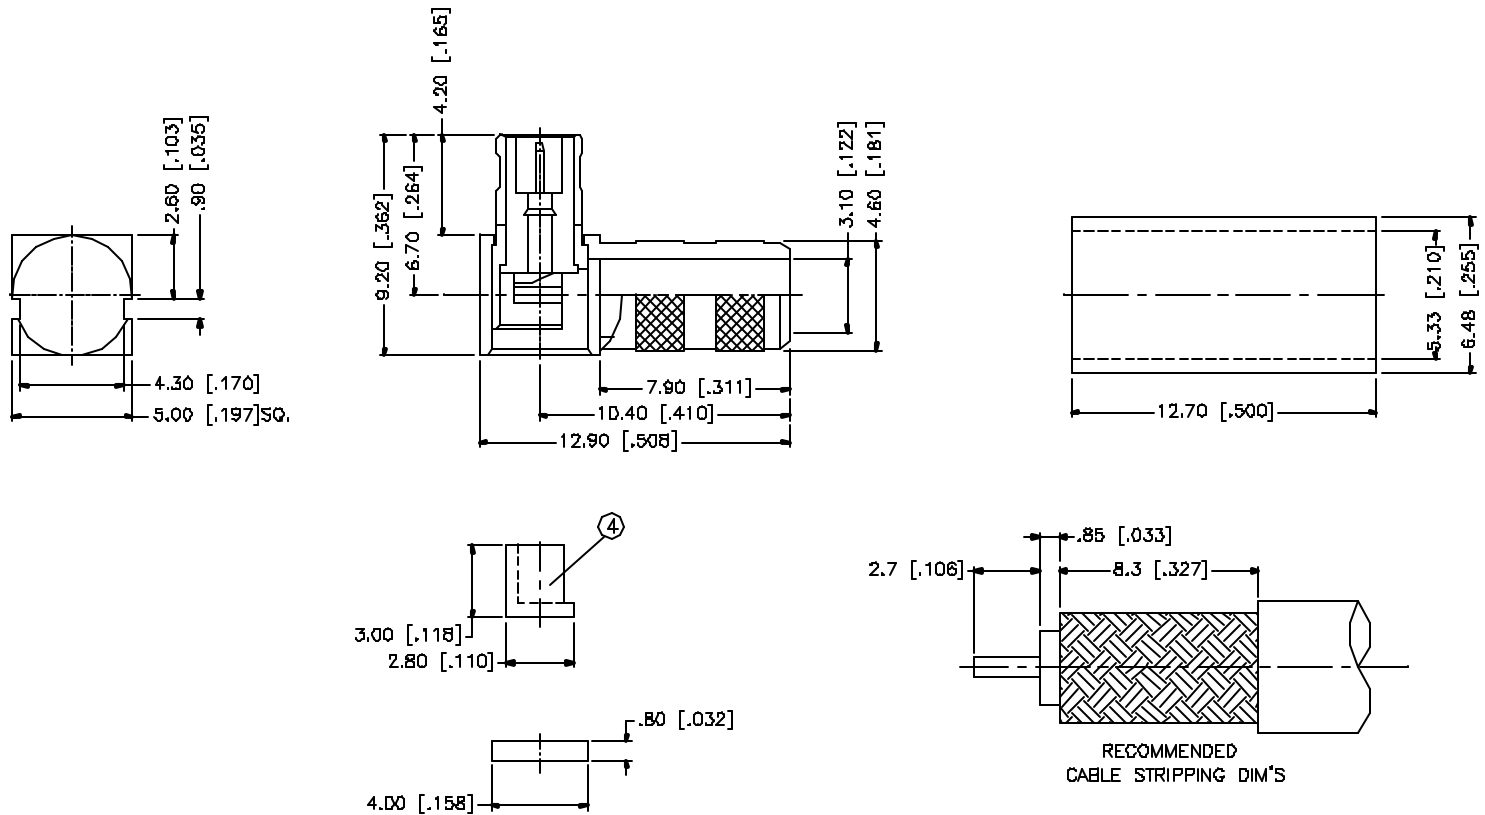

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						05/01/04
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED		PART DESCRIPTION MCX R/A CRIMP PLUG					
6	FERRULE	COPPER	NICKEL	1		ISSUED							
5	COVER	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SHEET	1 OF 1	PART NO. 252114					
4	INSULATOR	DELFIN	NATURAL	1									
3	CONTACT PIN	BRASS	GOLD	1				DWG. NO. 252114.DWG					
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	COPPER	NICKEL	1				REV.	A	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	DWG FILE C:/252/252114.DWG							