



**41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA**

**TECHNICAL DATA SHEET**

**PE15A4008**

PE15A4008 is a 1 W X-band high gain coaxial power amplifier in the 8 to 12 GHz frequency range. The amplifier offers 30 dBm of P1dB (min) and 41 dB (min) small signal gain with the excellent gain flatness of  $\pm 1.0$  dB. This performance is achieved through using hybrid MIC design and advanced GaAs PHEMT devices. The amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -30°C and +70°C.

**Features**

- 8.0 GHz to 12 GHz Frequency Range
- High P1dB Output Power: 30 dBm
- Small Signal Gain: 41 dB min
- Gain Flatness:  $\pm 1$  dB
- Noise Figure: 3.5 dB
- 50 Ohms input and output matched
- -30 to +70°C Operating Temperature
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Overvoltage External Protection for Easy Repair

**Applications**

- Telecom Infrastructure
- Test Instrumentation
- Fixed Microwave Backhaul
- Military & Space
- Radar Systems
- Communication Systems
- Microwave Radio Systems
- Satellite Communication
- Commercial Avionics
- Driver Amplifier
- High Power Output Amplifier

**Electrical Specifications** (TA = +25°C, DC Voltage = 12Volts, DC Current = 1,200mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	8		12	GHz
Small Signal Gain	41			dB
Gain Flatness		$\pm 1$	$\pm 1.5$	dB
Saturation Output Power	+31			dBm
Output at 1 dB Compression Point	+30			dBm
Noise Figure		3.5	4	dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage		12		Volts
Operating DC Current		1,200	1,300	mA
Operating Temperature Range	-30		+70	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA PE15A4008](#)



41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium  
Power High Gain Amplifier, 3.5 dB NF, SMA

## TECHNICAL DATA SHEET

PE15A4008

### Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+15	Volts
RF input Power	+17	dBm
Operating Temperature (base-plate)	-30 to +70	°C
Storage Temperature	-55 to +85	°C



ESD Sensitive Material,  
Transport material in  
Approved ESD bags.  
Handle only in approved  
ESD Workstation.

### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

### Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA PE15A4008](#)





41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA

## TECHNICAL DATA SHEET

PE15A4008

### Power Data

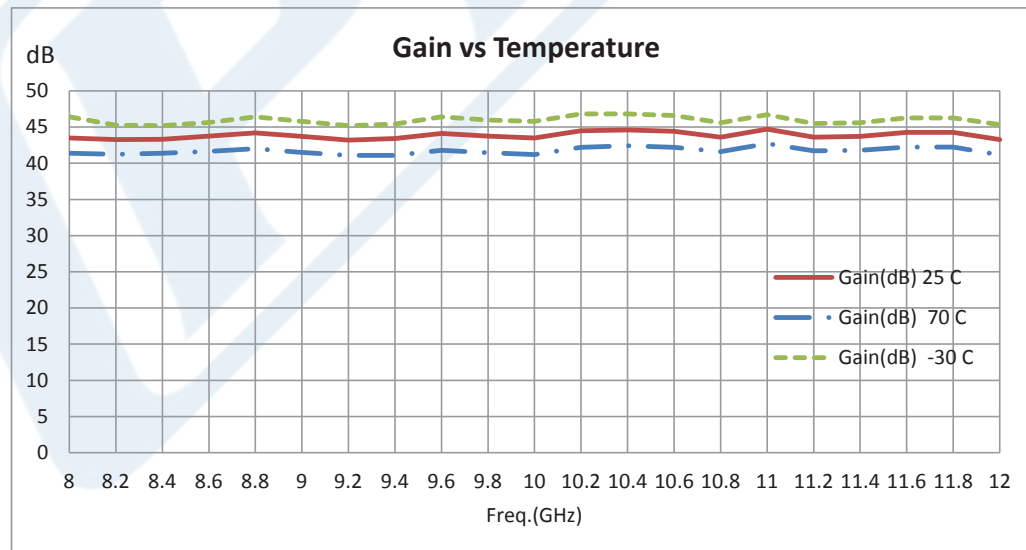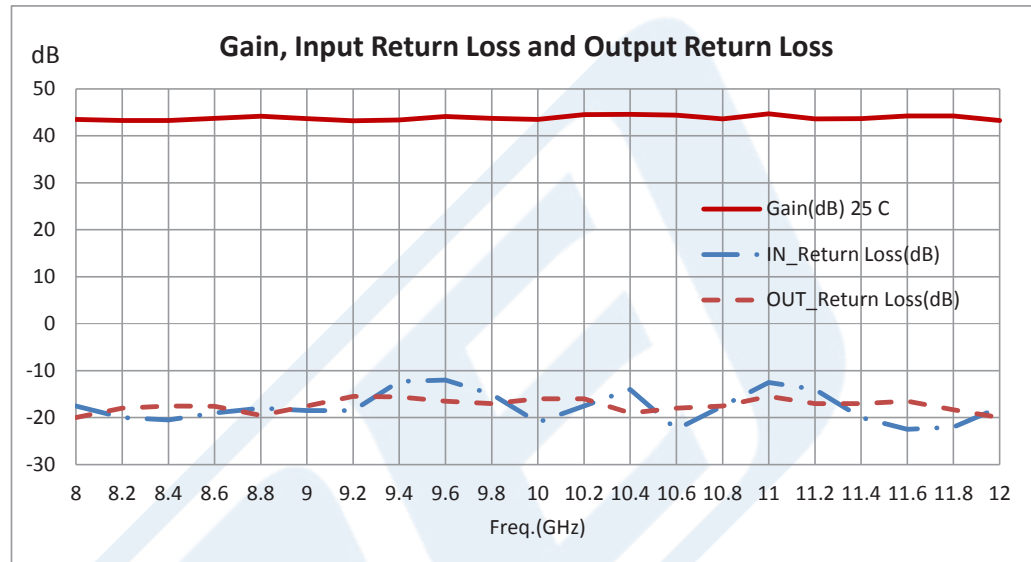



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA PE15A4008](#)



41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA

## TECHNICAL DATA SHEET

PE15A4008

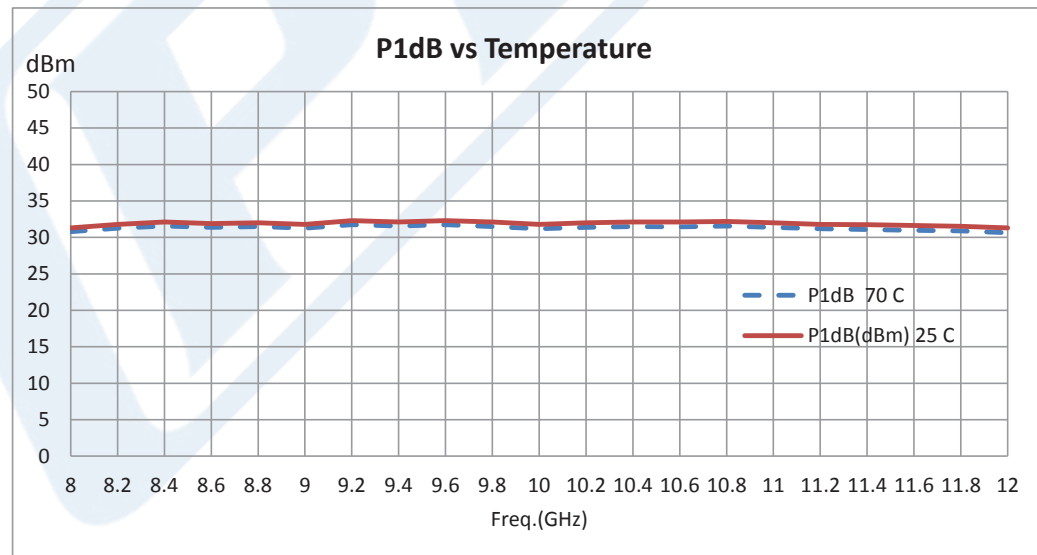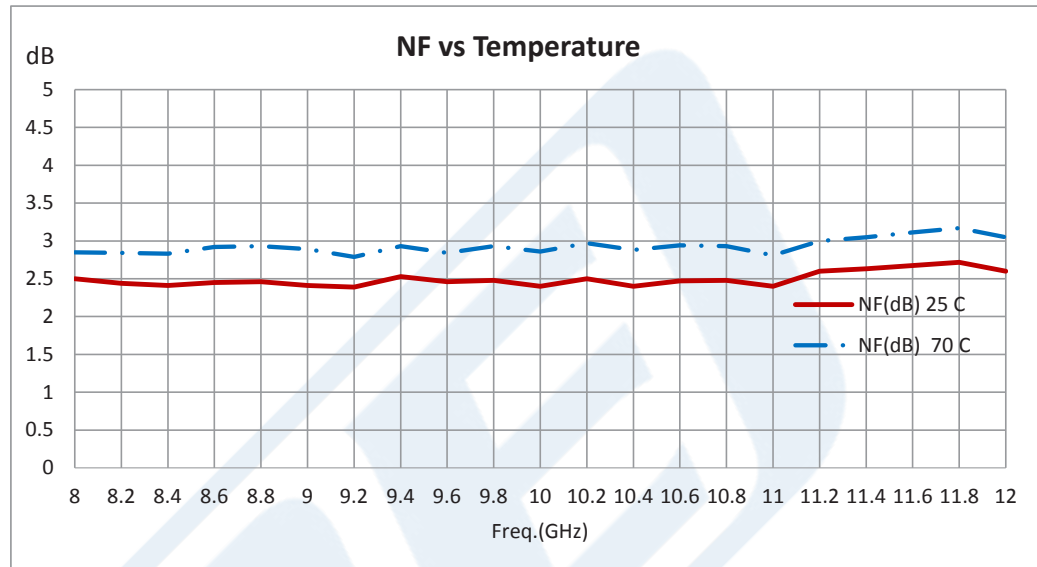


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA PE15A4008](#)



41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium  
Power High Gain Amplifier, 3.5 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4008

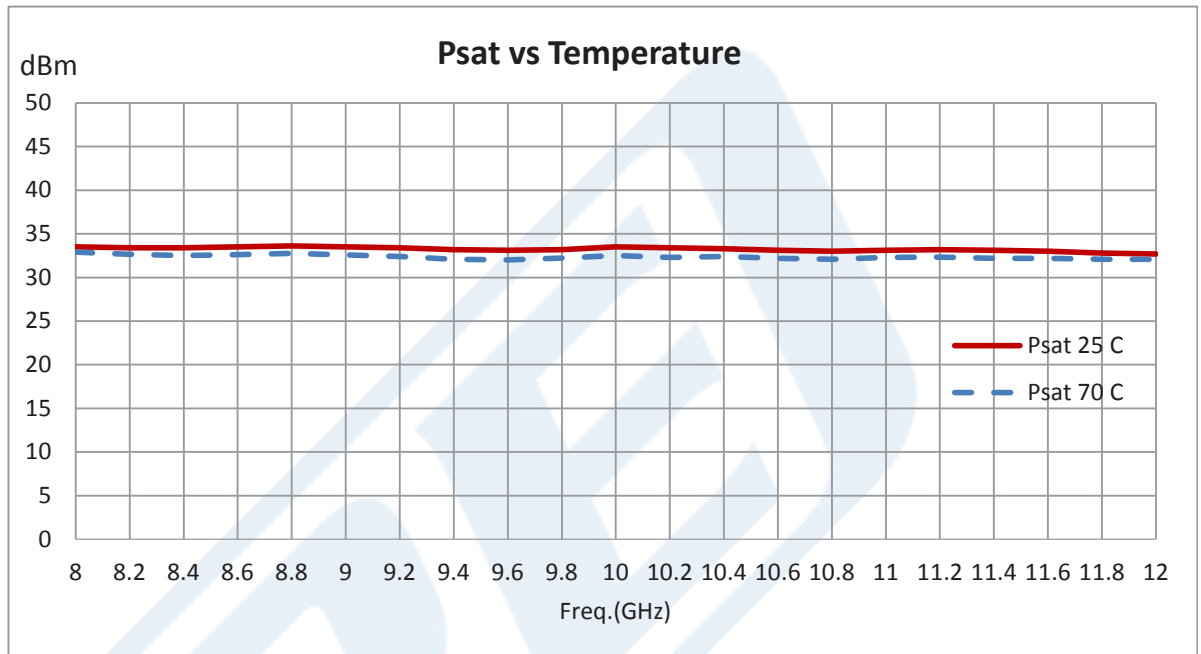

41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA PE15A4008](http://www.pasternack.com/41-db-gain-12-ghz-medium-power-high-gain-amplifier-sma-pe15a4008-p.aspx)

URL: <http://www.pasternack.com/41-db-gain-12-ghz-medium-power-high-gain-amplifier-sma-pe15a4008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE15A4008 CAD Drawing

41 dB Gain, 1 Watt, 8 GHz to 12 GHz, Medium Power High Gain Amplifier, 3.5 dB NF, SMA

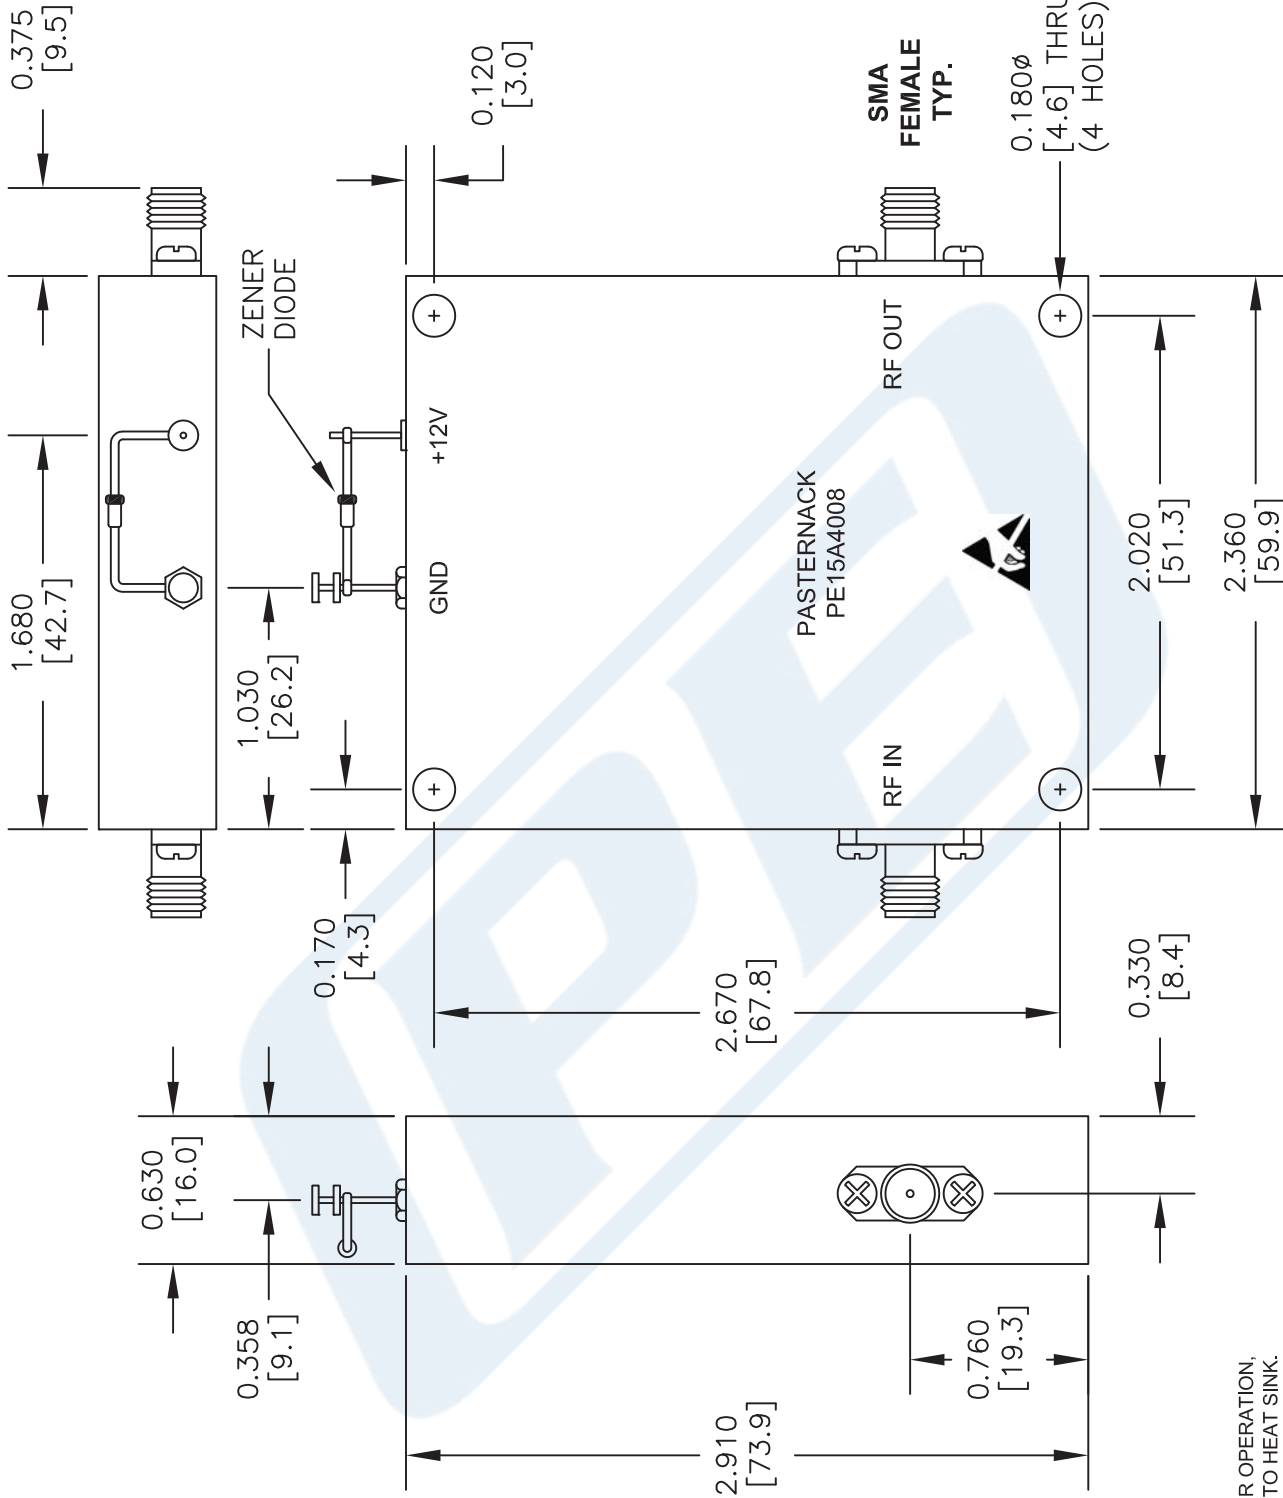

NOTE:  
HEAT SINK REQUIRED FOR PROPER OPERATION,  
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

DWG TITLE

**PE15A4008**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

**P****E** **PASTERNAK**<sup>®</sup>  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

FSCM NO. 53919

CAD FILE 031014

SCALE N/A

SIZE A

2233