




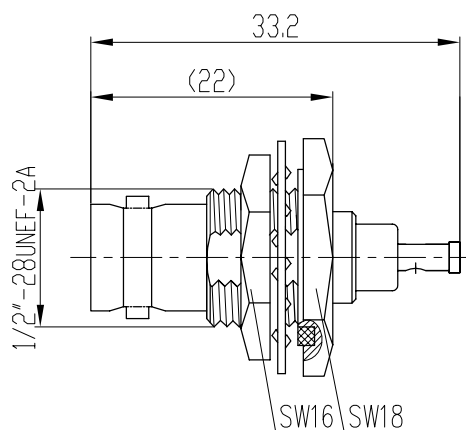

安装开孔
mounting hole



剥线尺寸
stripping dimension



产品型号 type	电缆型号 cable type
BNC-KY0.8C	□.D.1.13mm(AWG32)

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~4Ghz
3. Contact resistance
Center conductor: $\leq 1.5 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
4. Insulation resistance: $\geq 5000 \text{ M}\Omega$
5. Insulator withstanding: 1500V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~4Ghz
3. 接触电阻:
中心导体: $\leq 1.5 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
4. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
5. 介质耐压: 1500V
6. 插拔次数: 500次

Application: MIL-C-39012/16E

执行标准: MIL-C-39012/16E

Material&Finishing

1. Center contact :
Female: phosphor bronze, gold plated
2. Bodies and other metal parts:
brass, nickel or gold plated
3. Insulators: PTFE

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀金
2. 壳体和其它金属零件:
黄铜, 镀镍或镀金
3. 绝缘子: 聚四氟乙烯

		SCALE	
		1.5:1	
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

BNC-KY0.8C
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.