



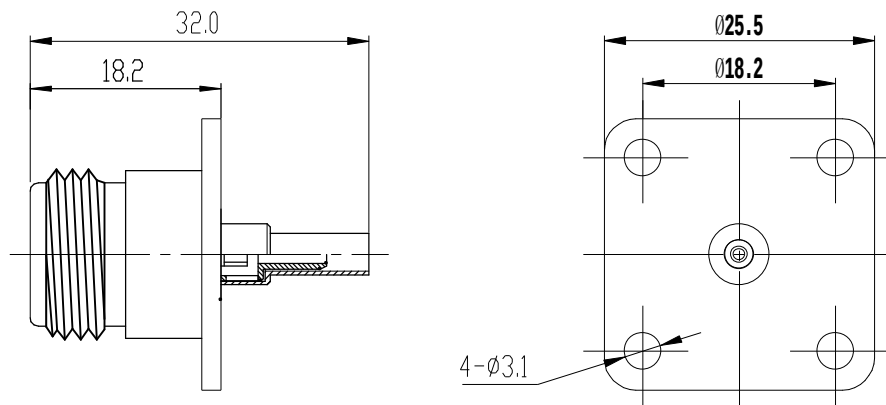

剥线尺寸
stripping dimension

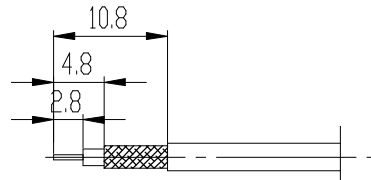

产品型号 type	电缆型号 cable type
N-KF3Y	SFT-50-1.5-1、SYV-50-2-1、RG316/U、RG179B/U

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
- Insulation resistance: $\geq 5000M\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.5
- Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact :
Female: phosphor bronze, gold plated
- Bodies: brass, nickel plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE


主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 1.0\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
- 绝缘电阻: $\geq 5000M\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀镍
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

		SCALE		N-KF3Y RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1			
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.		
DRAWN					
CHECKED					
APPROVED					