

LOW PROFILE LOW NOISE OCXO MV331

Features:

- Low profile package 25.8x25.8x10.6 mm
- Low phase noise
- Long term stability up to $\pm 2 \times 10^{-8}$ /year
- Standard frequency 10 MHz

Output	Supply voltage
SIN	12 V
HCMOS	5 V

ORDERING GUIDE: MV331-C3G-12V-SIN-10.0MHz- LN

Availability of certain stability vs. operating temperature range		$\pm 1 \times 10^{-8}$	$\pm 5 \times 10^{-9}$	$\pm 3 \times 10^{-9}$
		10	5	3
A	0...+55 °C	A	A	A
B	-10...+60 °C	A	A	A
C	-20...+70 °C	A	A	C
D	-40...+70 °C	A	A	NA
EX	-40...+85 °C	A	A	NA


A – available; NA – not available;
C – consult factory

For other temperature ranges see destination at the end of Data Sheet

Availability of certain aging values for certain frequencies		
G	$\pm 1 \times 10^{-7}$ /year	A
F	$\pm 5 \times 10^{-8}$ /year	A
E	$\pm 3 \times 10^{-8}$ /year	A
D	$\pm 2 \times 10^{-8}$ /year	C*

A – available; NA – not available; C – consult factory

Phase noise, dBc/Hz, for 10MHz	- (standard)	LN	ILN (for 12V, SIN)	ULN (for 12V, SIN)
1 Hz	-95	-100	-100	-95
10 Hz	-125	-130	-130	-125
100 Hz	-145	-145	-150	-152
1000 Hz	-150	-155	-155	-160
10000 Hz	-155	-155	-160	-165

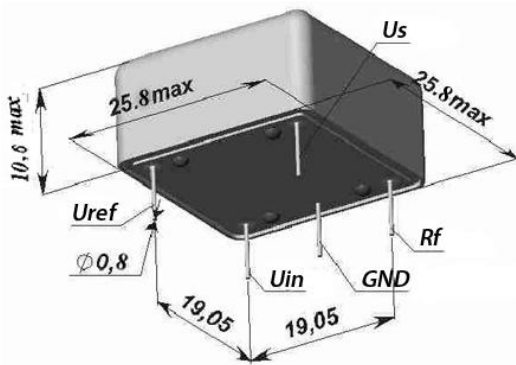

Vibrations:	
Frequency range	10-500 Hz
Acceleration	5 g
Shock:	
Acceleration	75g
Duration	3±1 ms
Humidity @ +25 °C	98%
Storage temperature range, °C	-55...+85 °C

Short-term stability (Allan Deviation) for 1s	$< 5 \times 10^{-12}$ $< 2 \times 10^{-12}$ (option)	
Frequency stability vs. load changes $\pm 5\%$	$< \pm 5 \times 10^{-10}$	
Frequency stability vs. voltage changes $\pm 5\%$	$< \pm 5 \times 10^{-10}$	
Warm-up time within accuracy $\pm 2 \times 10^{-8}$, @ +25°C	<3 min	
Supply voltage	12V $\pm 5\%$	5V $\pm 5\%$
Steady state current consumption @ +25°C	<130 mA	<400 mA
Peak current consumption during warm-up (for "D" temp. range at still air)	<400 mA	<1000 mA
Frequency pulling range	$> \pm 4.0 \times 10^{-7}$	
with external voltage range (Uin)	0...+5 V	0...+4.5 V
Reference voltage output (Uref)	+5 V	+4.5 V
Output	HCMOS	
Level	"0"	<0.5 V
	"1"	>4.0 V
Load	10 kOhm/30 pF	50 Ohm $\pm 5\%$
Harmonics	-	>30 dBc

*For all options of phase noise, except ULN

Additional notes:

For non standard operating temperature ranges please use the following two letters designations (first letter for lower limit, second for the upper limit), °C

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85



MORION, Inc



13a, KIMa Ave., St. Petersburg., 199155, RUSSIA. <http://www.morion.com.ru>
Tel: +7-812-350-9243; 332-5032. Fax: +7-812-332-5025. e-mail: sale@morion.com.ru

Due to continuous development and improvement Morion, Inc. reserves the right to modify design or specifications of its products without prior notice

Revision 2. July 2014