

ADAPTERS, IN-SERIES SMA

DC - 18 GHz BULKHEAD MOUNT



MODELS: 5205, 5205/AU


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 18.0 GHz
 VSWR
 DC - 4 GHz _____ 1.05:1 Max.
 4 - 8 GHz _____ 1.10:1 Max.
 8 - 18 GHz _____ 1.15:1 Max.
 Nominal Impedance _____ 50 Ohms
 Operating Temp Range _____ -55°C to +125°C

Mechanical:

Connectors _____ See Below
 (Mates with MIL-STD-348)
 Conductors _____ Gold Plated Beryllium Copper
 Nut & Washer: _____ Passivated Stainless Steel

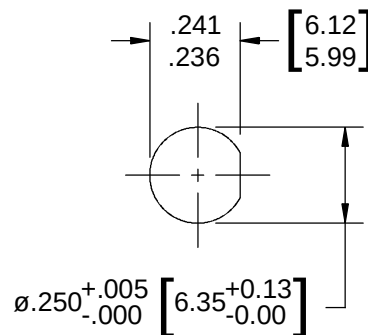


Recommended
Mounting Hole

Model Number: **5205**

Connectors _____ Passivated Stainless Steel

Model Number: **5205/AU**

Connectors _____ Gold Plated Stainless Steel

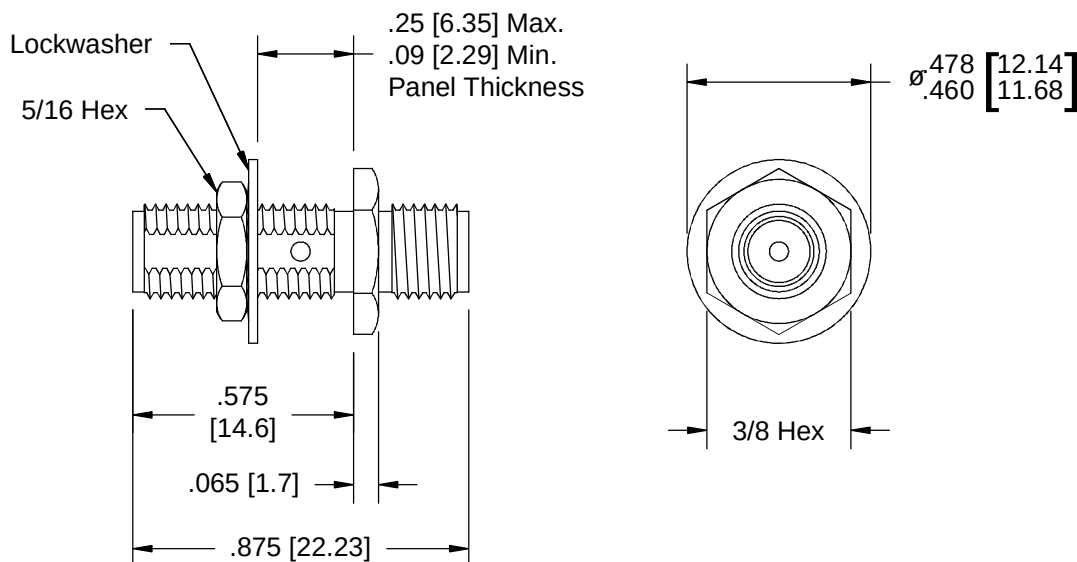

Panel Nut & Lock Washer are Shipped Unassembled.

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.

5205; REV G

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com