


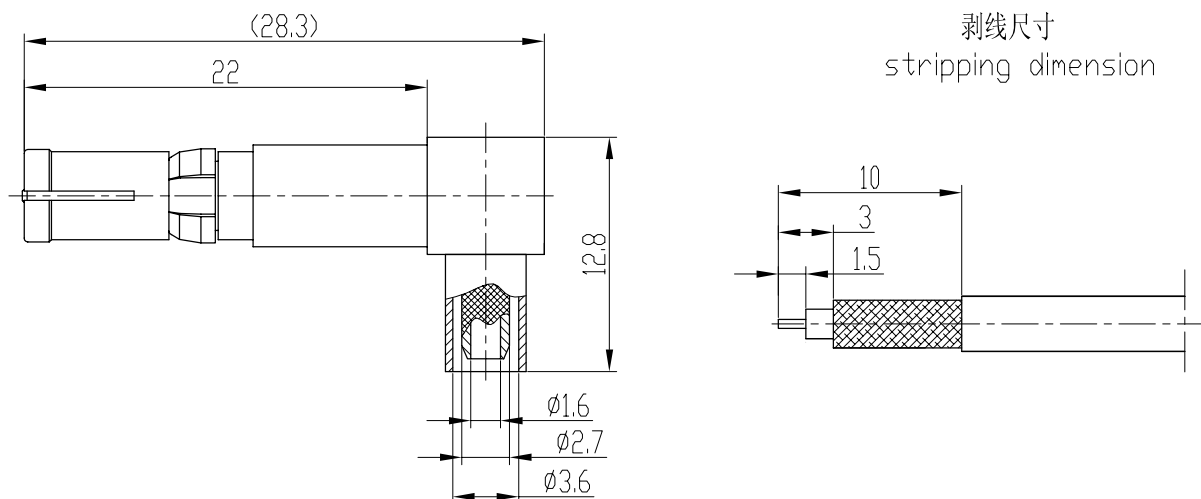

产品型号 type	配接电缆 cable type
DSD-JW3A	user supply

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~2.0Ghz
3. Contact resistance
Center conductor: $\leq 5.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
4. Insulation resistance: $\geq 500M\Omega$
5. Insulator withstanding: 500V
6. VSWR: ≤ 1.45
7. Durability: 500cycles

Application: Q/FD20131-2006

Material&Finishing

1. Center contact:
Male: brass, gold plated
2. Body: brass, gold plated
3. Crimp ferrule: copper, nickel plated
4. Insulators: PTFE


主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~2.0Ghz
3. 接触电阻:
中心导体: $\leq 5.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
4. 绝缘电阻: $\geq 500M\Omega$
5. 介质耐压: 500V
6. 电压驻波比: ≤ 1.45
7. 插拔次数: 500次

执行标准: Q/FD20131-2006

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀金
2. 壳体: 黄铜, 镀金
3. 线夹: 黄铜, 镀镍
4. 绝缘子: 取四氟乙烯

		SCALE		DSD-JW3A	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1			
	NAME	DATE	RF COAXIAL CONNECTOR		
DRAWN					
CHECKED			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.		
APPROVED					