

Lorch Microwave's PCS Fullband Duplexer provides high transmit to receive selectivity while minimizing insertion loss. The unit is available with temperature compensation and weatherproofing as an option for use in more extreme environmental conditions.




Standard Design Features

Passbands	
Receive	1850-1910 MHz
Transmit	1930-1990 MHz
Passband Insertion Loss	1.0 dB max
Passband Return Loss	18 dB min
Antenna to Transmit Rejection 1880-1910 MHz	75 dB min
Antenna to Receive Rejection 1930-1990 MHz	75 dB min
Rx – Tx Isolation	75 dB min
Power Handling CW	200 Watts
Peak	4500 Watts
Third Order Intermod	110 dBm min with two +43 dBm tones
Operating Temperature	-20 to +70 deg C
Connectors	Low IM N or 7/16 DIN Female
Size	9.00" x 7.00" x 2.00"**

*Not including connectors

Receive Channel Data

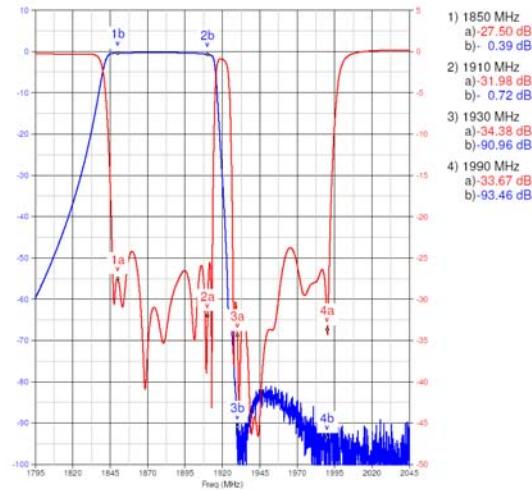

Transmit Channel Data

